



CHECK VALVE

Product Details


Dimension in mm	1/4"	3/8"	1/2"	3/4"	1"	1" 1/4	1" 1/2	2"	2" 1/2	3"	4"
A			64	70.5	82.5	82					
C			36	42	47	59.5					
D			15.5	20.5	27	36					
PN			16	16	16	16					

Features

- Working pressure 16 bar (232 psi)
- Working temperature from -10°C to +120°C from 14°F to 248°F)
- Thread ISO228 (equivalent to DIN 259 and BS2779)
- Suitable for domestic water services, heating and air-conditioning plants, compressed air systems, it can be vertical, horizontal, oblique.

Materials

- Coupling : Hot Pressed Brass : CW617N
- Stem Seat : Brass CW617N
- Rubber Seat : MBR 70
- Body : Hot Pressed Brass CW617N
- Spring : S.S. Inox AISI 302

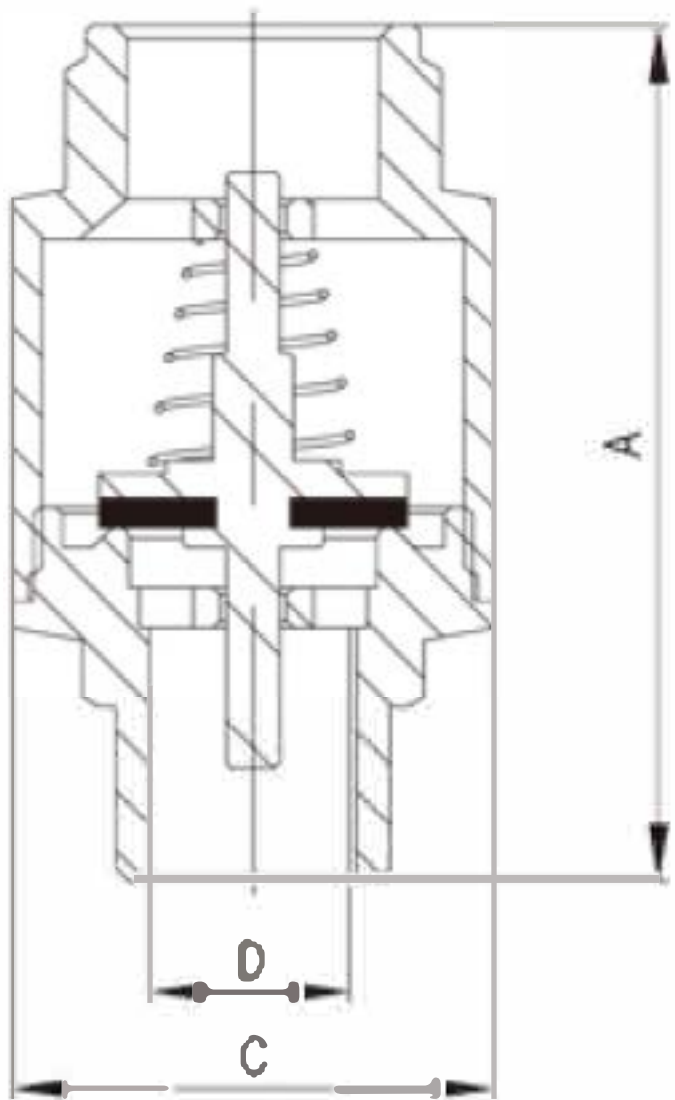

AIRUA



BALL VALVE

FULL FLOW ,MALE/FEMALE
FLAT LEVER HANDLE

Product Details


Dimension in mm	1/4"	3/8"	1/2"	3/4"	1"	1" 1/4	1" 1/2	2"	2" 1/2	3"	4"
A	48.5	50	57.5	63.8	74.5	87	98	113.5			
B	23	23	29.5	35	42.7	53	63	79			
C	39.2	39.8	54.2	57.6	60.6	75.8	81.3	88.5			
D	87	87	95	95	126	140	140	165			
E	9	10	14.8	19	24	30.2	37	47			
PN	25	25	25	25	25	25	25	25			

Features

- Working pressure 25 bar (362.5 psi)
- Working temperature from -10°C to +120°C (from 14°F to 248°F)
- Thread ISO228 (equivalent to DIN 259 and BS2779)
- Opening/closing test 10000 times
- Suitable for water services, heating and air-conditioning plants, compressed air systems.

Materials

- Body : Hot Pressed : Brass CW617N
- Ball Seal : P.T.F.E.
- Ball : Hot Pressed : Brass CW617N
- Coupling : Hot Pressed : Brass CW617N
- Stem Seal : O - RING NBR 70
- Nut : Zinc Plated Steel

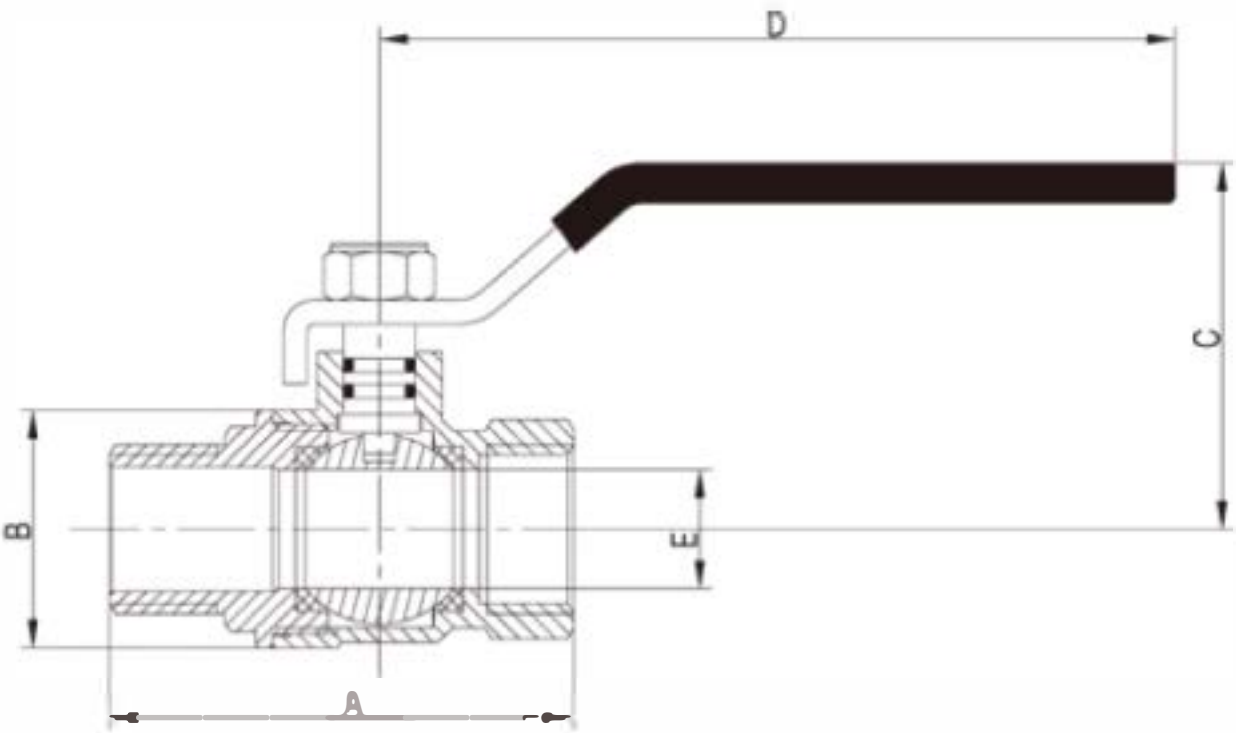

Via E. Fermi 10 35020
Padova Italy | +39346001453
E-mail:tonyparon@wtaeupore.eu