


60 Hz



GFH Series

CENTRIFUGAL ELECTRIC PUMPS MANUFACTURED TO STANDARD EN 733
EQUIPPED WITH IE2/IE3 MOTORS COMPLYING WITH REGULATION (EC) no. 640/2009

GFH SERIES HYDRAULIC PERFORMANCE RANGE AT 60 Hz

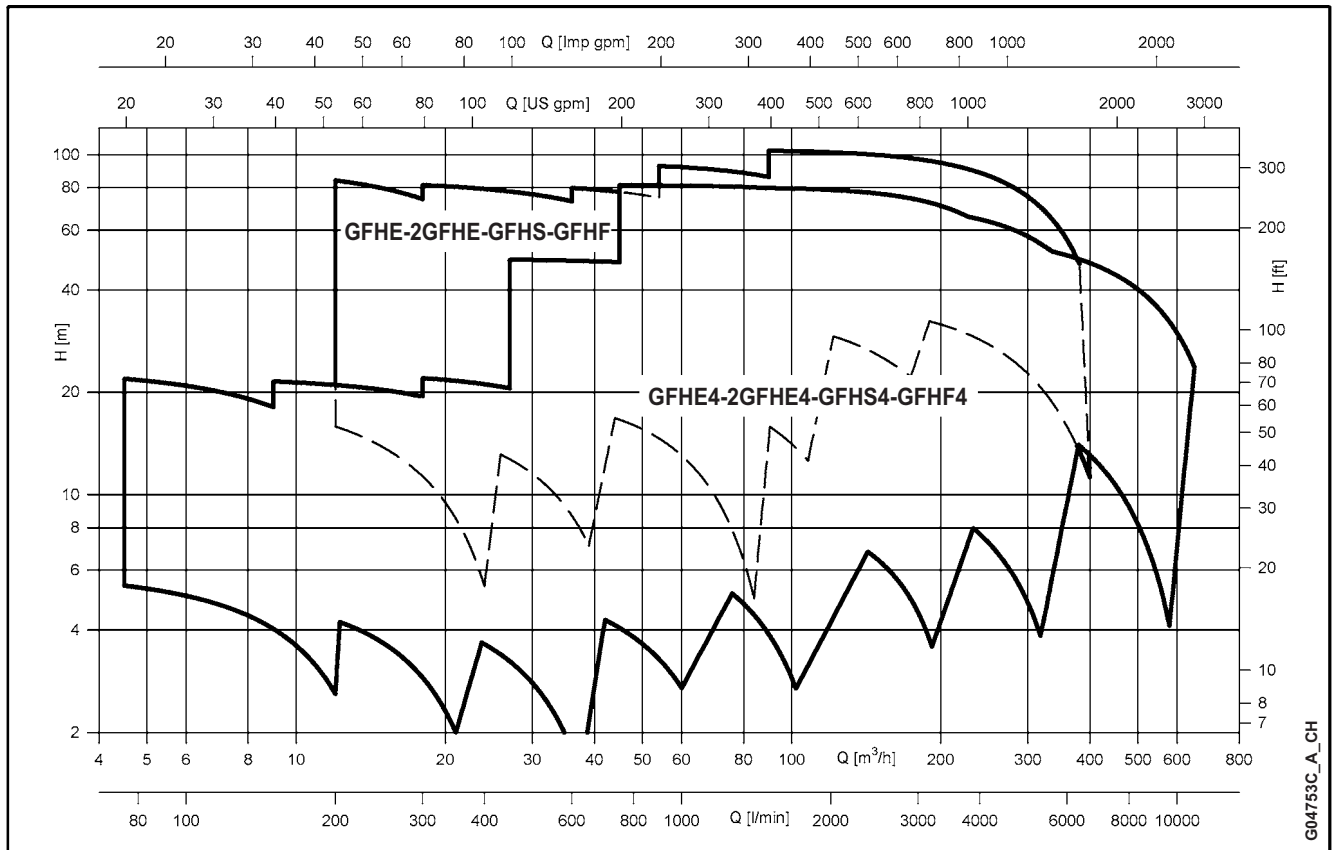

CONTENTS

Specifications	5
Construction Characteristics	6
List of 2-pole, 60 Hz Models	8
List of 4-pole, 60 Hz Models	9
List of Models and Table of Materials	10
GFH Mechanical Seal	19
Motors	20
Hydraulic Performance Range, 60 Hz, 2 Poles	30
Hydraulic Performance Range, 60 Hz, 4 Poles	34
Operating Characteristics 60 Hz, 2 Poles	38
Operating Characteristics 60 Hz, 4 Poles	60
Dimensions and Weights	95
Accessories	119
Technical Appendix	123

Centrifugal electric pumps manufactured to Standard EN 733

GFH Series 60 Hz



MARKET SECTORS

CIVIL, AGRICULTURAL, INDUSTRIAL.

APPLICATIONS

- Handling of clean, chemically non-aggressive water and liquids.
- Water supply and pressure boosting.
- Irrigation.
- Water circulation in air conditioning systems.
 - Washing systems.
- Industry.
- Agriculture.
- Swimming pools.

SPECIFICATIONS

PUMP

- **Delivery** up to 480 m³/h, 2 poles.
750 m³/h, 4 poles.
- **Head** over 100 m, 2 poles.
80 m, 4 poles.
- **Temperature** of pumped liquid:
 - -20°C to +85°C for GFH 32, 40, 50, 65, 80 standard version.
 - -30°C to +120°C for GFH 100, 125, 150 standard version (65-315 80-315 and 80-400 included).
 - Upon request, up to +140°C for GFH 100, 125, 150.
- Maximum operating **pressure**:
 - 12 bar (PN 12) up to GFH 80.
 - PN 16 flanges for GFH 100, 125, 150.
- Maximum pressure in pump casing:
12 bar for temperatures up to 120°C,
10 bar for temperatures ranging from 120°C to 140°C.
- Wear rings made of AISI 316L stainless steel on impeller front and rear wear plates up to GFH 80 (65-315, 80-315, and 80-400 excluded).
- Mechanical seal according to EN12756 (ex DIN 24960).

- Mechanical seal lubricated by internal recirculation of pumped liquid to seal housing for GFH 32, 40, 50, 65, 80 (65-315, 80-315 and 80-400 excluded).
- Mechanical seal locking pin slot for GFH32, 40, 50, 65, 80 (65-315, 80-315 and 80-400 excluded).
- Counter-clockwise rotation when looking at pump from the suction port size.
- **Impeller**: made of AISI 316L stainless steel, **laser technology** welded for sizes 32, 40, 50, 65-125, cast iron for sizes 65-160, 65-200, 65-250, 65-315, 80, 100, 125, 150.

- **Bronze impeller available on request** (for models normally equipped with cast iron impeller).

MOTOR

- Squirrel cage in short circuit, aluminum casing, enclosed construction with external ventilation.
- **Standard supplied IE2/IE3 motors are compliant with Regulation (EC) no. 640/2009 and IEC 60034-30.**
- IP55 protection.
- Class 155 (F) insulation.
- Performances according to EN 60034-1
- Continuous duty.
- Maximum ambient temperature: +40°C.
- Condensation drain plugs on all standard internal production motors.
- **Standard voltage:**
 - 2-pole motors**
Single-phase: 220-230 V, 60 Hz.
Three-phase : 220-380 V, 60 Hz.
 - 4-pole motors**
Three-phase : 220-380 V, 60 Hz.

CONSTRUCTION CHARACTERISTICS

- Cast iron centrifugal pump with end suction and radial discharge ports.
- Hydraulic sizes and nominal diameter (DN) of suction and discharge ports according to EN 733 (ex DIN 24255).
- Flanges according to EN 1092-2 (ex UNI 2236 and DIN 2532).
- Back pull-out design (impeller, adaptor and motor can be extracted without disconnecting the pump body from the pipes).

MOTOR-PUMP COUPLING

Three different types of motor/pump coupling are available:

- **GFHE**: close-coupled by means of an adaptor bracket with an impeller keyed directly to the motor shaft extension.
- **GFHS**: with a bracket, adaptor and rigid coupling keyed to the standard motor shaft extension.
- **GFHF**: with bracket, support, flexible coupling and aligning and anchoring base.
- Bare shaft pump and version with spacer coupling are also available upon request.


ACCESSORIES ON REQUEST

- AISI 316 stainless steel or galvanized iron counterflanges.
- Intermediate flange with pressure gauge connection.
- Pump and motor shims.



OPTIONAL FEATURES

- Different voltages and frequencies.
- Special materials for the mechanical seal and gaskets.
- Model with air valve.
- Mechanical seal with anti-rotation lockpin.
- Model with external fluxing of the mechanical seal.
- Tropicalized motors.
- Version with Hydrovar® control system.
- GFHF with flexible coupling with spacer.
- Diesel engines.
- Version with bronze impeller.
- ATEX 94/9/CE, Gruppo II, Category 3, gas atmosphere (G).



GFHE – GFHE4



GFHS – GFHS4

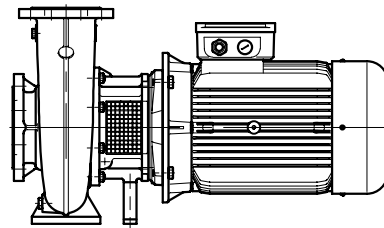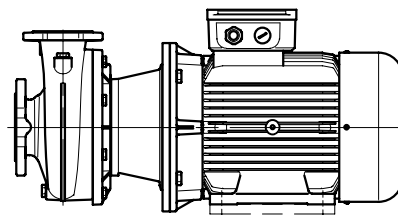


GFHF – GFHF4

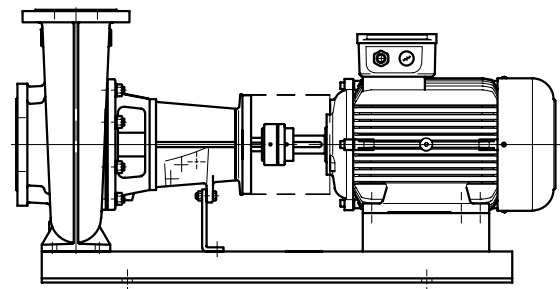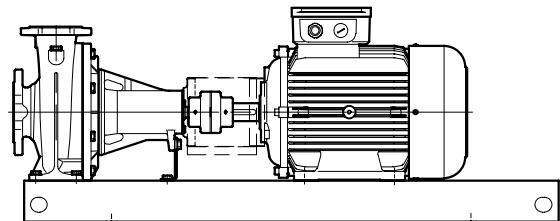


G04705A_C_SC

GFH SERIES IDENTIFICATION CODE

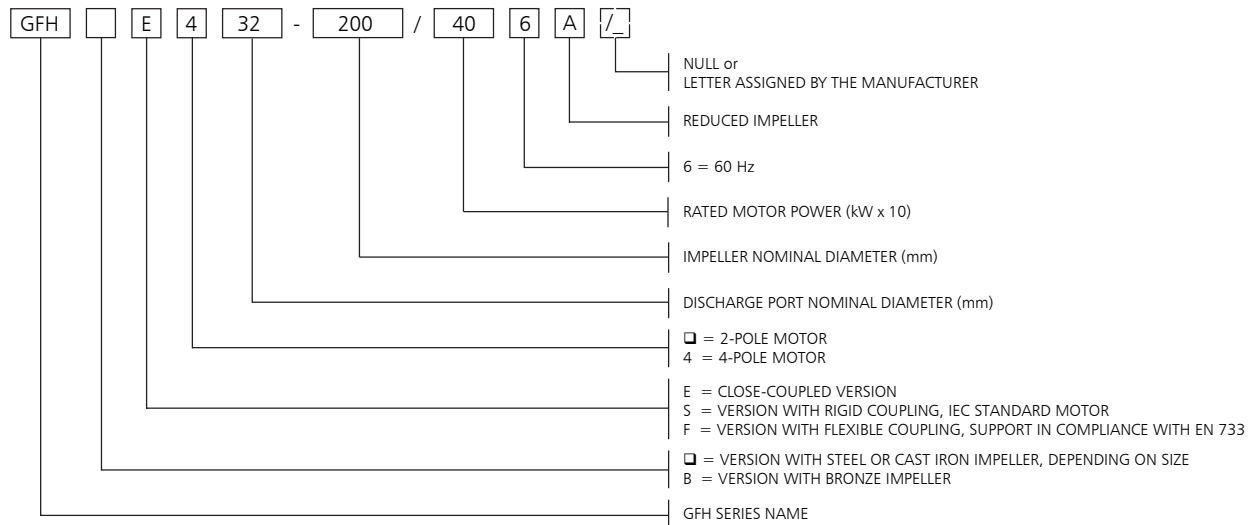


GFHE - GFHS RATING PLATE

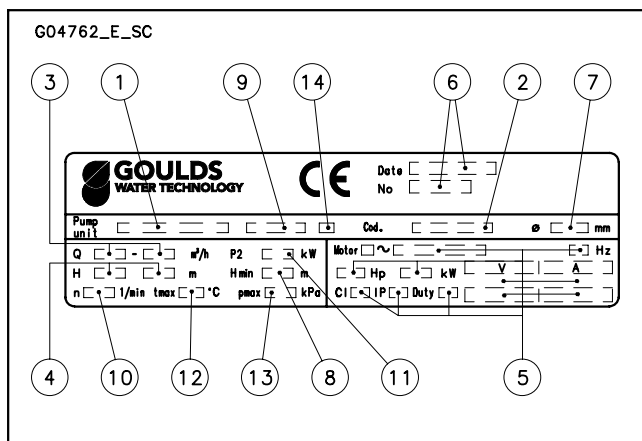


LEGEND

- 1 - Electric pump type
- 2 - Code
- 3 - Delivery range
- 4 - Head range
- 5 - Motor type
- 6 - Date of manufacturing and serial number
- 7 - Impeller diameter
- 8 - Minimum head
- 9 - Mechanical seal material identification code
- 10 - Speed
- 11 - Rated power
- 12 - Maximum operating temperature
- 13 - Maximum operating pressure
- 14 - O-ring material identification code

GFHF RATING PLATE (PUMP ONLY)

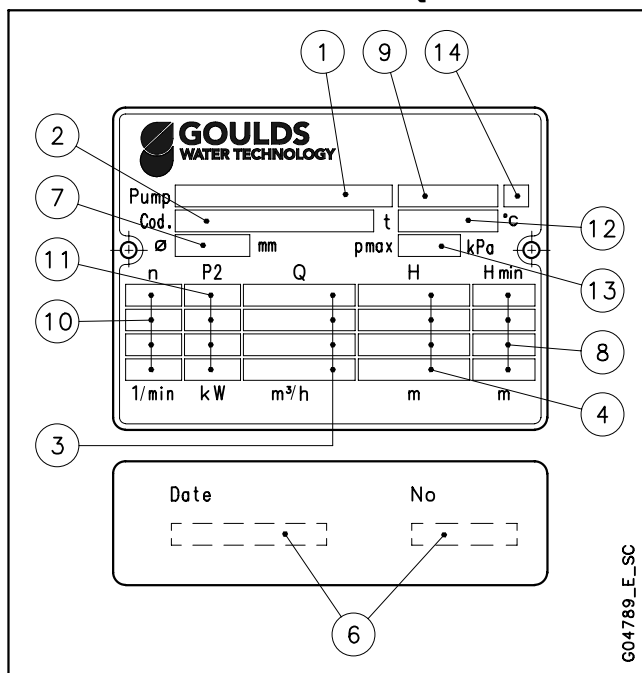

GFHF RATING PLATE (ELECTRIC PUMP)

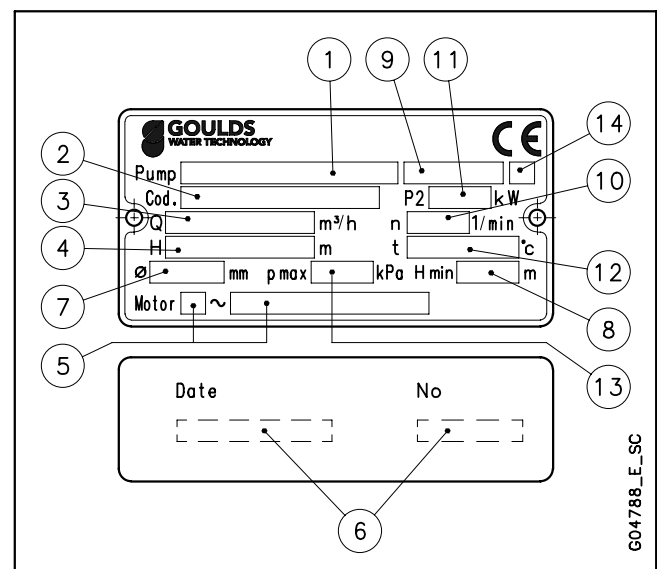

LIST OF MODELS, GFH 60 Hz SERIES 2 POLES

SIZE	kW	VERSION				
		GFHEM	2GFHE	GFHE	GFHS	GFHF
32-125/116	1,1	•	-	•	•	•
32-160/156	1,5	•	-	•	•	•
32-160/226	2,2	•	-	•	•	•
32-200/306	3	-	-	•	•	•
32-200/406	4	-	-	•	•	•
32-250/556	5,5	-	•	-	-	-
32-250/756	7,5	-	•	-	-	-
40-125/156	1,5	•	-	•	•	•
40-125/226	2,2	•	-	•	•	•
40-160/306	3	-	-	•	•	•
40-160/406	4	-	-	•	•	•
40-200/556	5,5	-	-	•	•	•
40-200/756	7,5	-	-	•	•	•
40-250/926	9,2	-	-	•	-	-
40-250/1106A	11	-	-	-	•	•
40-250/1106	11	-	-	•	•	•
40-250/1506	15	-	-	•	•	•
50-125/306	3	-	-	•	•	•
50-125/406	4	-	-	•	•	•
50-160/556	5,5	-	-	•	•	•
50-160/756	7,5	-	-	•	•	•
50-200/926	9,2	-	-	•	-	-
50-200/1106A	11	-	-	-	•	•
50-200/1106	11	-	-	•	•	•
50-250/1506	15	-	-	•	•	•
50-250/1856	18,5	-	-	•	•	•
50-250/2206	22	-	-	•	•	•
65-125/556	5,5	-	-	•	•	•
65-125/756	7,5	-	-	•	•	•
65-160/926	9,2	-	-	•	-	-
65-160/1106A	11	-	-	-	•	•
65-160/1106	11	-	-	•	•	•
65-160/1506	15	-	-	•	•	•
65-200/1856	18,5	-	-	•	•	•
65-200/2206	22	-	-	•	•	•
65-250/2206	22	-	-	•	•	•
65-250/3006	30	-	-	-	•	•
65-250/3706	37	-	-	-	•	•
80-160/1506	15	-	-	•	•	•
80-160/1856	18,5	-	-	•	•	•
80-200/2206	22	-	-	•	•	•
80-200/3006	30	-	-	-	•	•
80-250/3706	37	-	-	-	•	•
80-250/4506	45	-	-	-	•	•
80-250/5506	55	-	-	-	•	•

• = Available

gfh_gfhe-gfhsg-fhf_2p60-en_b_tem

SIZE	kW	VERSION	
		GFHS	GFHF
100-160/3006	30	•	•
100-160/3706	37	-	•
100-160/4506	45	-	•
100-160/5506	55	-	•
100-200/3006	30	•	•
100-200/3706	37	•	•
100-200/4506	45	-	•
100-200/5506	55	-	•
100-200/7506	75	-	•
100-250/5506	55	-	•
100-250/7506	75	-	•
100-250/9006	90	-	•

• = Available

lm_gfhs_gfhf_2p60-en_a_tem

LEGEND

GFHE : Close-coupled version with adapter, and impeller keyed directly to the motor shaft extension.

2GFHE : Close-coupled version with adapter, and 2 impellers keyed directly to the motor shaft extension.

GFHE M : FHE version with single-phase motor.

GFHS : Coupled by means of adapter, bracket and rigid coupling keyed to the standard motor shaft extension.

GFHF : Coupled by means of adapter, support, flexible coupling and aligning and anchoring base.

LIST OF MODELS, GFH 60 Hz SERIES 4 POLES

SIZE	kW	VERSION			
		GFHE4	2GFHE4	GFHS4	GFHF4
32-125/026	0,25	•	-	-	•
32-160/026	0,25	•	-	-	•
32-160/036	0,37	•	-	-	•
32-200/036	0,37	•	-	-	•
32-200/056	0,55	•	-	-	•
32-250/076	0,75	-	•	-	-
32-250/116	1,1	-	•	-	-
40-125/026	0,25	•	-	-	•
40-125/036	0,37	•	-	-	•
40-160/036	0,37	•	-	-	•
40-160/056	0,5	•	-	-	•
40-200/076	0,75	•	-	•	•
40-200/116	1,1	•	-	•	•
40-250/116	1,1	•	-	•	•
40-250/156	1,5	•	-	•	•
40-250/226	2,2	•	-	•	•
50-125/036	0,37	•	-	-	•
50-125/056	0,5	•	-	-	•
50-160/076	0,75	•	-	•	•
50-160/116	1,1	•	-	•	•
50-200/116	1,1	•	-	•	•
50-200/156	1,5	•	-	•	•
50-250/226A	2,2	•	-	•	•
50-250/226	2,2	•	-	•	•
50-250/306	3	•	-	•	•
65-125/076	0,75	•	-	•	•
65-125/116	1,1	•	-	•	•
65-160/116	1,1	•	-	•	•
65-160/156	1,5	•	-	•	•
65-160/226	2,2	•	-	•	•
65-200/226	2,2	•	-	•	•
65-200/306	3	•	-	•	•
65-250/306	3	•	-	•	•
65-250/406	4	•	-	•	•
65-250/556	5,5	•	-	•	•
65-315/556	5,5	-	-	•	•
65-315/756	7,5	-	-	•	•
65-315/1106	11	-	-	•	•
65-315/1506	15	-	-	•	•
65-315/1856	18,5	-	-	•	•
80-160/156	1,5	•	-	•	•
80-160/226	2,2	•	-	•	•
80-200/306	3	•	-	•	•
80-200/406	4	•	-	•	•
80-250/406	4	•	-	•	•
80-250/556	5,5	•	-	•	•
80-250/756	7,5	•	-	•	•
80-315/1106	11	-	-	•	•
80-315/1506	15	-	-	•	•
80-315/1856	18,5	-	-	•	•
80-315/2206	22	-	-	•	•
80-315/3006	30	-	-	-	•
80-400/2206	22	-	-	-	•
80-400/3006	30	-	-	-	•
80-400/3706	37	-	-	-	•
80-400/4506	45	-	-	-	•
80-400/5506	55	-	-	-	•

• = Available

gfh_gfhe4-gfhs4-gfhf4_4p60-en_b_tem


SIZE	kW	VERSION	
		GFHS4	GFHF4
100-160/406	4	•	•
100-160/556	5,5	•	•
100-160/756	7,5	-	•
100-200/406	4	•	•
100-200/556	5,5	•	•
100-200/756	7,5	•	•
100-200/1106	11	•	•
100-250/1106	11	•	•
100-250/1506	15	•	•
100-250/1856	18,5	•	•
100-250/2206	22	-	•
100-315/2206	22	•	•
100-315/3006	30	•	•
100-315/3706	37	-	•
100-400/3006	30	-	•
100-400/3706	37	-	•
100-400/4506	45	-	•
100-400/5506	55	-	•
100-400/7506	75	-	•
125-200/756	7,5	•	•
125-200/1106	11	•	•
125-200/1506	15	•	•
125-250/1106	11	•	•
125-250/1506	15	•	•
125-250/1856	18,5	•	•
125-250/2206	22	•	•
125-250/3006	30	•	•
125-315/3006	30	•	•
125-315/3706	37	-	•
125-315/4506	45	-	•
125-315/5506	55	-	•
125-315/7506	75	-	•
125-400/4506	45	-	•
125-400/5506	55	-	•
125-400/7506	75	-	•
150-250/2206	22	•	•
150-250/3006	30	•	•
150-250/3706	37	-	•
150-250/4506	45	-	•
150-315/3706	37	-	•
150-315/4506	45	-	•
150-315/5506	55	-	•
150-315/7506	75	-	•
150-400/5506	55	-	•
150-400/7506	75	-	•

• =Available

lm_gfhs4-gfhf4_4p60-en_a_tem

2GFHE-2GFHE4 SERIES LIST OF MODELS AND TABLE OF MATERIALS

04736_B_DS

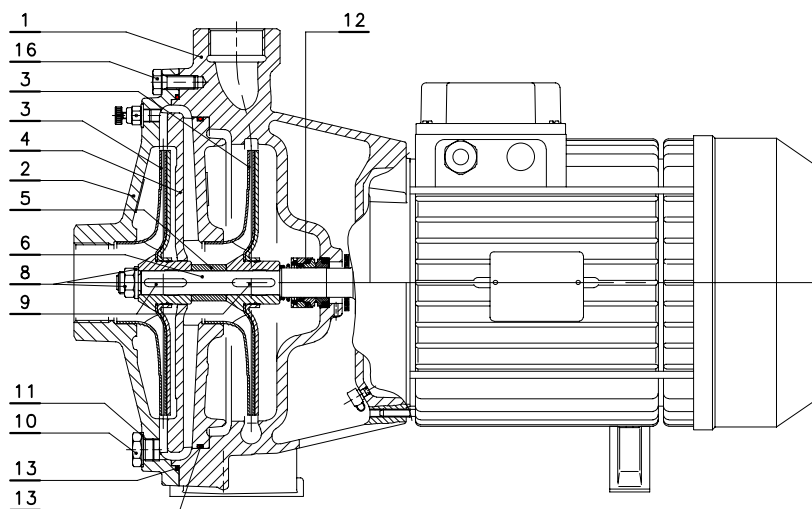

VERSIONS	
2 POLES	4 POLES
2GFHE 32-250/556	2GFHE4 32-250/076
2GFHE 32-250/756	2GFHE4 32-250/116


gfh-2gfhe-p-en_a_mo

REF. N.	PART	MATERIAL	REFERENCE STANDARDS	
			EUROPE	USA
1	Pump body	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
2	Suction flange	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
3	Impeller	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
4	Diffuser	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
5	Impeller spacer	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
6	Shaft extension	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
8	Impeller lock nut and washer	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
9	Tab	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
10	Fill and drain plugs	Nickel-plated brass	EN 12164-CuZn39Pb3 (CW614N)	-
11	Fill and drain plugs seals	Aluminium	EN 573-AW-Al99,5 (AW1050A)	-
12	Mechanical seal	Ceramic / Carbon / NBR (standard version)		
13	Elastomers	NBR (standard version)		
16	Pump body fastening bolts and screws	Galvanized steel		

fh_2fhe-en_a_tm

GFHE-GFHE4 SERIES LIST OF MODELS AND TABLE OF MATERIALS

04702_B_DS

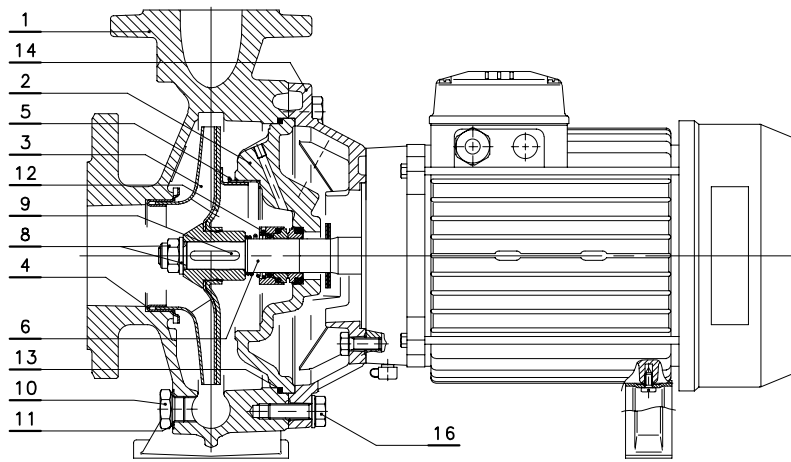

VERSIONS	
2 POLES	4 POLES
GFHE 32-125/116	GFHE4 32-200/056
GFHE 32-160/156	GFHE4 40-160/056
GFHE 32-160/226	GFHE4 40-200/076
GFHE 32-200/306	GFHE4 40-200/116
GFHE 32-200/406	GFHE4 40-250/116
GFHE 40-125/156	GFHE4 40-250/156
GFHE 40-125/226	GFHE4 40-250/226
GFHE 40-160/306	GFHE4 50-125/056
GFHE 40-160/406	GFHE4 50-160/076
GFHE 40-200/556	GFHE4 50-160/116
GFHE 40-200/756	GFHE4 50-200/116
GFHE 40-250/926	GFHE4 50-200/156
GFHE 40-250/1106	GFHE4 50-250/226A
GFHE 50-125/306	GFHE4 50-250/226
GFHE 50-125/406	GFHE4 50-250/306
GFHE 50-160/556	GFHE4 65-125/076
GFHE 50-160/756	GFHE4 65-125/116
GFHE 50-200/926	GFHE4 65-160/116
GFHE 50-200/1106	GFHE4 65-160/156
GFHE 65-125/556	GFHE4 65-160/226
GFHE 65-125/756	GFHE4 65-200/226
GFHE 65-160/926	GFHE4 65-200/306
GFHE 65-160/1106	GFHE4 65-250/306
	GFHE4 65-250/406
	GFHE4 65-250/556
	GFHE4 80-160/156
	GFHE4 80-160/226
	GFHE4 80-200/306
	GFHE4 80-200/406
	GFHE4 80-250/406
	GFHE4 80-250/556
	GFHE4 80-250/756

gfhe-gfhe4-p-en_a_mo


REF. N.	PART	MATERIAL	REFERENCE STANDARDS	
			EUROPE	USA
1	Pump body	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
2	Seal housing	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
3	Impeller	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
	Impeller	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
	Impeller	Bronze	EN 1982-CuSn10-C (CC480K)	UNS C90700
4	Wear ring	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
5	Counterwear ring	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
6	Shaft extension	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
7	Shaft rigid coupling	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
8	Impeller lock nut and washer	Stainless steel	EN 10088-1-X5CrNiMo17-12-2 (1.4401)	AISI 316
9	Tab	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
10	Fill and drain plugs	Nickel-plated brass	EN 12164-CuZn39Pb3 (CW614N)	-
11	Fill and drain plugs seals	Aluminium	EN 573-AW-AI99,5 (AW1050A)	-
12	Mechanical seal	Ceramic / Carbon / NBR (standard version)		
13	Elastomers	NBR (standard version)		
14	Adapter *	Aluminium	EN 1706-AC-AISI11Cu2 (Fe) (AC46100)	-
	Adapter	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
16	Pump body fastening bolts and screws	Galvanized steel		

* For 32/40-125 2/4 pole, 32/40-160 2/4 pole versions

fh_fhe-en_c_tm

GFHE-GFHE4 SERIES LIST OF MODELS AND TABLE OF MATERIALS

04702A_B_DS

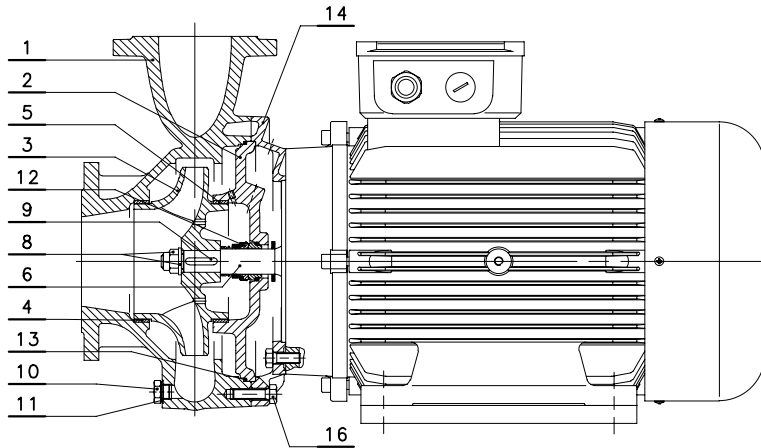


VERSIONS

2 POLES

GFHE 40-250/1506
GFHE 50-250/1506
GFHE 50-250/1856
GFHE 50-250/2206
GFHE 65-160/1506
GFHE 65-200/1856
GFHE 65-200/2206
GFHE 65-250/2206
GFHE 80-160/1506
GFHE 80-160/1856
GFHE 80-200/2206

gfh-gfhe-s-en_a_mo

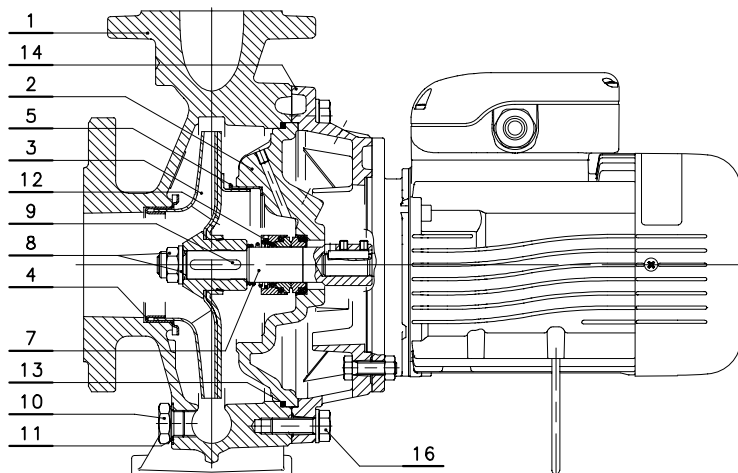

VERSIONS

4 POLES

GFHE4 32-125/026
GFHE4 32-160/026
GFHE4 32-160/036
GFHE4 32-200/036
GFHE4 40-125/026
GFHE4 40-125/036
GFHE4 40-160/036
GFHE4 50-125/036

gfh-gfhe4-p-en_a_mo

REF. N.	PART	MATERIAL	REFERENCE STANDARDS	
			EUROPE	USA
1	Pump body	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
2	Seal housing	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
3	Impeller	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
	Impeller	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
	Impeller	Bronze	EN 1982-CuSn10-C (CC480K)	UNS C90700
4	Wear ring	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
5	Counterwear ring	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
6	Shaft extension	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
7	Shaft rigid coupling	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
8	Impeller lock nut and washer	Stainless steel	EN 10088-1-X5CrNiMo17-12-2 (1.4401)	AISI 316
9	Tab	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
10	Fill and drain plugs	Nickel-plated brass	EN 12164-CuZn39Pb3 (CW614N)	-
11	Fill and drain plugs seals	Aluminium	EN 573-AW-AI99,5 (AW1050A)	-
12	Mechanical seal	Ceramic / Carbon / NBR (standard version)		
13	Elastomers	NBR (standard version)		
14	Adapter *	Aluminium	EN 1706-AC-AISI11Cu2 (Fe) (AC46100)	-
	Adapter	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
16	Pump body fastening bolts and screws	Galvanized steel		


* For 32/40-125 2/4 pole, 32/40-160 2/4 pole versions

fh_fhe-en_c_tm

GFHS-GFHS4 SERIES

LIST OF MODELS AND TABLE OF MATERIALS

04756_B_DS

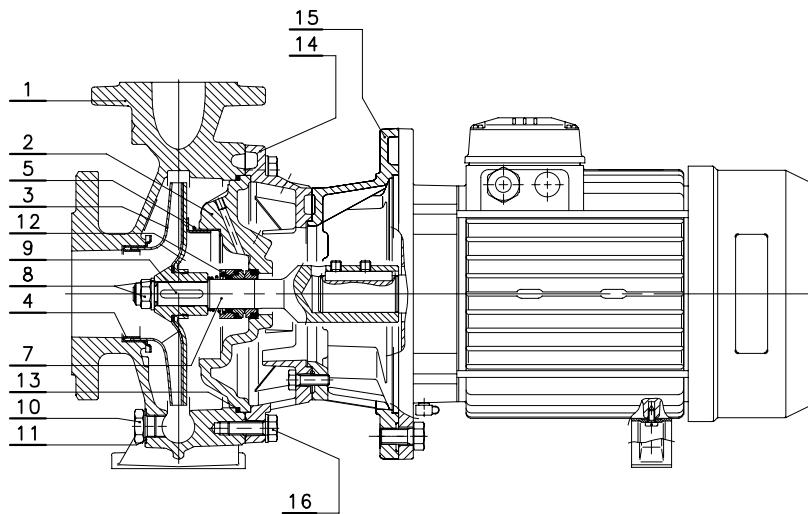

VERSIONS	
2 POLES	4 POLES
GFHS 32-125/116	GFHS4 40-200/076
GFHS 32-160/156	GFHS4 40-200/116
GFHS 32-160/226	GFHS4 40-250/116
GFHS 32-200/306	GFHS4 40-250/156
GFHS 32-200/406	GFHS4 40-250/226
GFHS 40-125/156	GFHS4 50-160/076
GFHS 40-125/226	GFHS4 50-160/116
GFHS 40-160/306	GFHS4 50-200/116
GFHS 40-160/406	GFHS4 50-200/156
GFHS 40-200/556	GFHS4 50-250/226A
GFHS 40-200/756	GFHS4 50-250/226
GFHS 50-125/306	GFHS4 50-250/306
GFHS 50-125/406	GFHS4 65-125/076
GFHS 50-160/556	GFHS4 65-125/116
GFHS 50-160/756	GFHS4 65-160/116
GFHS 65-125/556	GFHS4 65-160/156
GFHS 65-125/756	GFHS4 65-160/226
	GFHS4 65-200/226
	GFHS4 65-200/306
	GFHS4 65-250/306
	GFHS4 65-250/406
	GFHS4 65-250/556
	GFHS4 80-160/156
	GFHS4 80-160/226
	GFHS4 80-200/306
	GFHS4 80-200/406
	GFHS4 80-250/406
	GFHS4 80-250/556
	GFHS4 80-250/756

gfhs-gfhs4-p-en_a_mo

REF. N.	PART	MATERIAL	REFERENCE STANDARDS	
			EUROPE	USA
1	Pump body	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
2	Seal housing	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
3	Impeller	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
	Impeller	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
	Impeller	Bronze	EN 1982-CuSn10-C (CC480K)	UNS C90700
4	Wear ring	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
5	Counterwear ring	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
7	Shaft rigid coupling	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
8	Impeller lock nut and washer	Stainless steel	EN 10088-1-X5CrNiMo17-12-2 (1.4401)	AISI 316
9	Tab	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
10	Fill and drain plugs	Nickel-plated brass	EN 12164-CuZn39Pb3 (CW614N)	-
11	Fill and drain plug seals	Aluminium	EN 573-AW-Al99,5 (AW1050A)	-
12	Mechanical seal	Ceramic / Carbon / NBR (standard version)		
13	Elastomers	NBR (standard version)		
14	Adapter *	Aluminium	EN 1706-AC-AlSi11Cu2 (Fe) (AC46100)	-
	Adapter	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
	Adapter motor connector	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
16	Pump body fastening bolts and screws	Galvanized steel		


* For 32/40-125 2/4 pole, 32/40-160 2/4 pole

fh_fhs-en_c_tm

GFHS SERIES


LIST OF MODELS AND TABLE OF MATERIALS

04757_B_DS

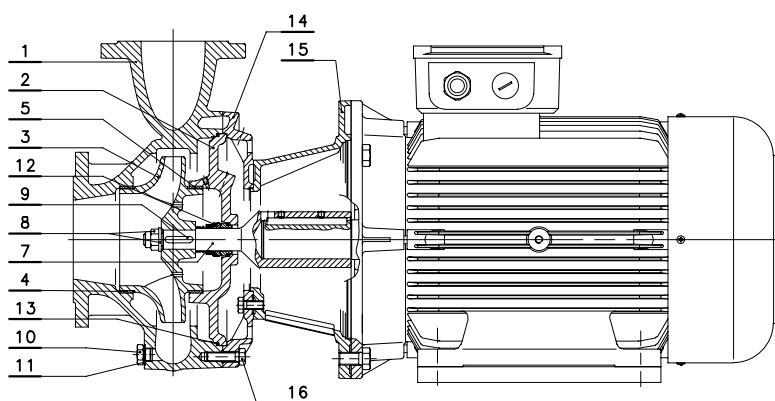

VERSIONS	
2 POLES	
GFHS 40-250/1106A	GFHS 65-160/1106A
GFHS 40-250/1106	GFHS 65-160/1106
GFHS 40-250/1506	GFHS 65-160/1506
GFHS 50-200/1106A	GFHS 65-200/1856
GFHS 50-200/1106	GFHS 65-200/2206
GFHS 50-250/1506	GFHS 65-250/2206
GFHS 50-250/1856	GFHS 80-160/1506
GFHS 50-250/2206	GFHS 80-160/1856
	GFHS 80-200/2206

gfh-gfhs-s-en_a_mo

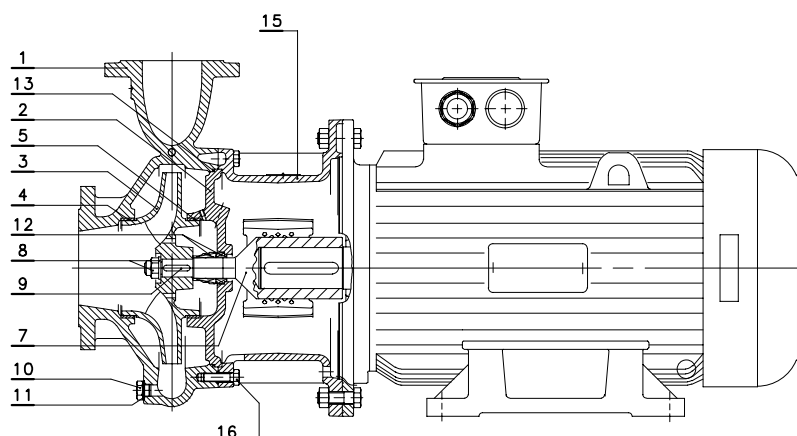

VERSIONS	
2 POLES	
GFHS 65-250/3006	
GFHS 65-250/3706	
GFHS 80-200/3006	
GFHS 80-250/3706	
GFHS 80-250/4506	
GFHS 80-250/5506	

gfh-gfhs30-55-s-en_a_mo


REF. N.	PART	MATERIAL	REFERENCE STANDARDS	
			EUROPE	USA
1	Pump body	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
2	Seal housing	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
3	Impeller	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
	Impeller	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
	Impeller	Bronze	EN 1982-CuSn10-C (CC480K)	UNS C90700
4	Wear ring	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
5	Counterwear ring	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
7	Shaft rigid coupling	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
8	Impeller lock nut and washer	Stainless steel	EN 10088-1-X5CrNiMo17-12-2 (1.4401)	AISI 316
9	Tab	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
10	Fill and drain plugs	Nickel-plated brass	EN 12164-CuZn39Pb3 (CW614N)	-
11	Fill and drain plug seals	Aluminium	EN 573-AW-Al99,5 (AW1050A)	-
12	Mechanical seal	Ceramic / Carbon / NBR (standard version)		
13	Elastomers	NBR (standard version)		
14	Adapter *	Aluminium	EN 1706-AC-AlSi11Cu2 (Fe) (AC46100)	-
	Adapter	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
	Adapter motor connector	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
16	Pump body fastening bolts and screws	Galvanized steel		

* For 32/40-125 2/4 pole, 32/40-160 2/4 pole

fh_fhs-en_c_tm

GFHS-GFHS4 SERIES LIST OF MODELS AND TABLE OF MATERIALS

04766_C_DS

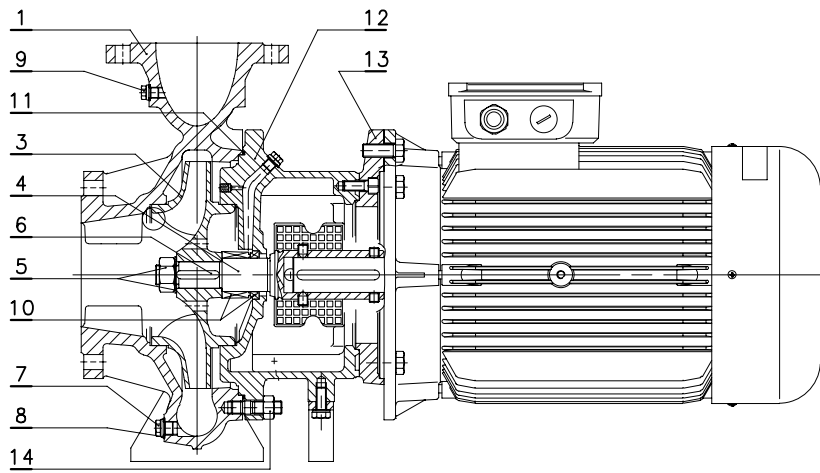

VERSIONS

2 POLES	4 POLES
GFHS 100-160/3006	GFHS4 65-315/556
GFHS 100-200/3006	GFHS4 65-315/756
GFHS 100-200/3706	GFHS4 65-315/1106
	GFHS4 65-315/1506
	GFHS4 65-315/1856
	GFHS4 80-315/1106
	GFHS4 80-315/1506
	GFHS4 80-315/1856
	GFHS4 80-315/2206
	GFHS4 100-160/556
	GFHS4 100-200/556
	GFHS4 100-200/756
	GFHS4 100-200/1106
	GFHS4 100-250/1106
	GFHS4 100-250/1506
	GFHS4 100-250/1856
	GFHS4 100-315/2206
	GFHS4 100-315/3006
	GFHS4 125-200/756
	GFHS4 125-200/1106
	GFHS4 125-200/1506
	GFHS4 125-250/1106
	GFHS4 125-250/1506
	GFHS4 125-250/1856
	GFHS4 125-250/2206
	GFHS4 125-250/3006
	GFHS4 125-315/3006
	GFHS4 150-250/2206
	GFHS4 150-250/3006

lm-gfhs65-150-s-en_b_mo


REF. N.	PART	MATERIAL	REFERENCE STANDARDS	
			EUROPE	USA
1	Pump body	Cast iron	EN 1561-GJL-250 (JL1040)	ASTM Class 35
2	Seal housing	Cast iron	EN 1561-GJL-250 (JL1040)	ASTM Class 35
3	Impeller	Cast iron	EN 1561-GJL-250 (JL1040)	ASTM Class 35
		Bronze	EN 1982-CuSn10-C (CC480K)	UNS C90700
4	Rigid coupling	Stainless steel	EN 10088-1-X20Cr13 (1.4021)	AISI 420
5	Impeller lock nut and washer	Steel		
6	Tab	Steel	EN 10083-1-C45E (1.1191)	-
7	Fill and drain plugs	Steel		
8	Fill/drain plug seals	Asbestos-free synthetic fiber AFM34 ®		
9	Plugs for gauge connectors	Steel		
10	Mechanical seal	Silicon carbide / Carbon / EPDM (standard version)		
11	Elastomers	EPDM (standard version)		
12	Adapter	Cast iron	EN 1561-GJL-250 (JL1040)	ASTM Class 35
13	Adapter motor connector	Cast iron	EN 1561-GJL-250 (JL1040)	ASTM Class 35
14	Pump body fastening bolts and screws	Steel		

lm_fhs 65-150-en_c_tm

GFHS4 SERIES

LIST OF MODELS AND TABLE OF MATERIALS

04767_D_DS

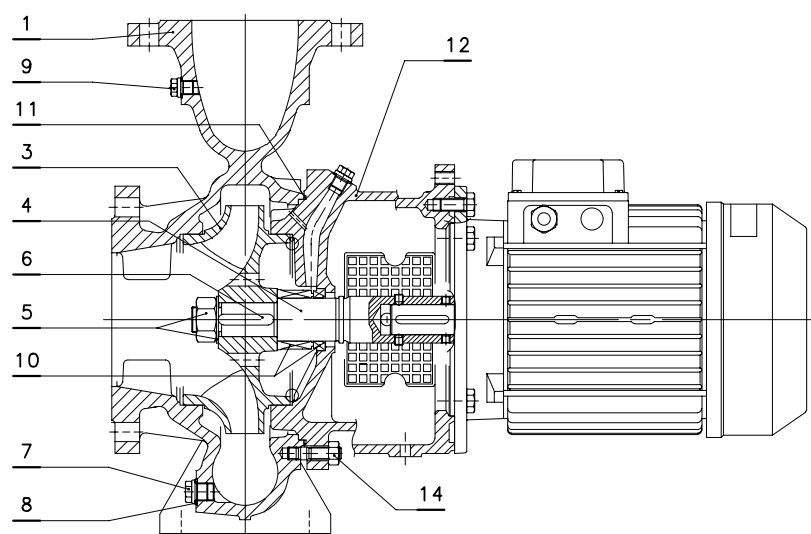

VERSIONS

4 POLES

GFHS4 100-160/406

GFHS4 100-200/406


lm-gfhs4-p-en_a_mo

REF. N.	PART	MATERIAL	REFERENCE STANDARDS	
			EUROPE	USA
1	Pump body	Cast iron	EN 1561-GJL-250 (JL1040)	ASTM Class 35
2	Seal housing	Cast iron	EN 1561-GJL-250 (JL1040)	ASTM Class 35
3	Impeller	Cast iron	EN 1561-GJL-250 (JL1040)	ASTM Class 35
		Bronze	EN 1982-CuSn10-C (CC480K)	UNS C90700
4	Rigid coupling	Stainless steel	EN 10088-1-X20Cr13 (1.4021)	AISI 420
5	Impeller lock nut and washer	Steel		
6	Tab	Steel	EN 10083-1-C45E (1.1191)	-
7	Fill and drain plugs	Steel		
8	Fill/drain plug seals	Asbestos-free synthetic fiber AFM34 ®		
9	Plugs for gauge connectors	Steel		
10	Mechanical seal	Silicon carbide / Carbon / EPDM (standard version)		
11	Elastomers	EPDM (standard version)		
12	Adapter	Cast iron	EN 1561-GJL-250 (JL1040)	ASTM Class 35
13	Adapter motor connector	Cast iron	EN 1561-GJL-250 (JL1040)	ASTM Class 35
14	Pump body fastening bolts and screws	Steel		

lm_fhs 65-150-en_c_tm

GFHF BARE SHAFT SERIES LIST OF MODELS AND TABLE OF MATERIALS

04779_B_DS

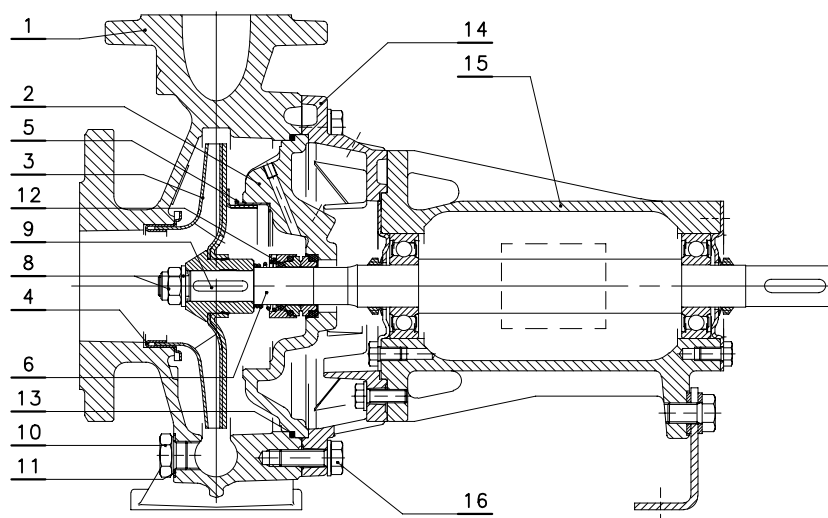

VERSIONS

GFHF 32-125
GFHF 32-160
GFHF 32-200
GFHF 40-125
GFHF 40-160
GFHF 40-200
GFHF 40-250
GFHF 50-125
GFHF 50-160
GFHF 50-200
GFHF 50-250
GFHF 65-125
GFHF 65-160
GFHF 65-200
GFHF 65-250
GFHF80-160
GFHF 80-200
GFHF 80-250

gfh-gfhf-p-en_a_mo


REF. N.	PART	MATERIAL	REFERENCE STANDARDS	
			EUROPE	USA
1	Pump body	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
2	Seal housing	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
3	Impeller	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
	Impeller	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
	Impeller	Bronze	EN 1982-CuSn10-C (CC480K)	UNS C90700
4	Wear ring	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
5	Counterwear ring	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
6	Shaft extension	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
8	Impeller lock nut and washer	Stainless steel	EN 10088-1-X5CrNiMo17-12-2 (1.4401)	AISI 316
9	Tab	Stainless steel	EN 10088-1-X2CrNiMo17-12-2 (1.4404)	AISI 316L
10	Fill and drain plugs	Nickel-plated brass	EN 12164-CuZn39Pb3 (CW614N)	-
11	Fill and drain plug seals	Aluminium	EN 573-AW-Al99,5 (AW1050A)	-
12	Mechanical seal	Ceramic / Carbon / NBR standard version)		
13	Elastomers	NBR (standard version)		
14	Adapter *	Aluminium	EN 1706-AC-AlSi11Cu2 (Fe) (AC46100)	-
	Adapter	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
15	Transmission support body	Cast iron	EN 1561-GJL-200 (JL1030)	ASTM Class 25
16	Pump body fastening bolts and screws	Galvanized steel		

* For 32/40-125 2/4 pole, 32/40-160 2/4 pole versions

fh_fhf-en_a_tm

GFHF BARE SHAFT SERIES LIST OF MODELS AND TABLE OF MATERIALS

04784_C_DS

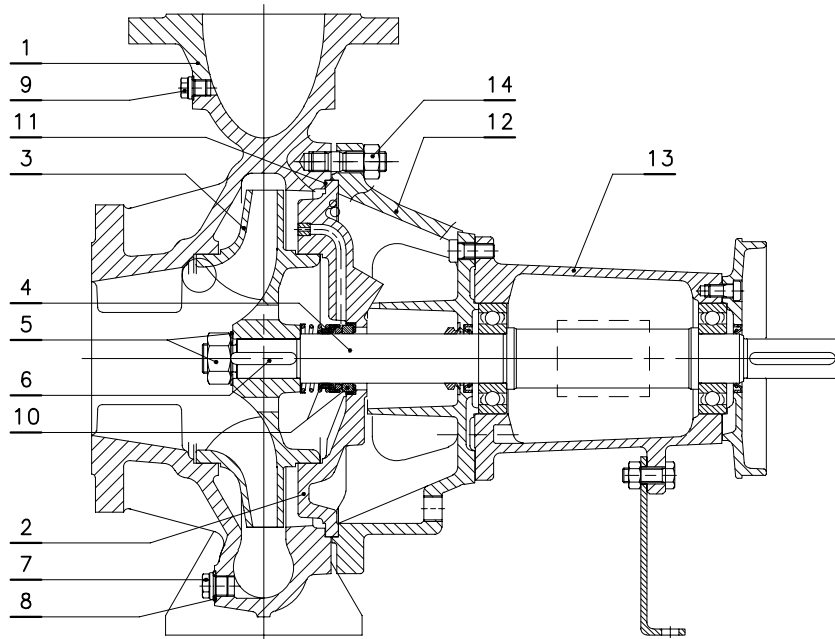

VERSIONS

GFHF 65-315
GFHF 80-315
GFHF 80-400
GFHF 100-160
GFHF 100-200
GFHF 100-250
GFHF 100-315
GFHF 100-400
GFHF 125-200
GFHF 125-250
GFHF 125-315
GFHF 125-400
GFHF 150-250
GFHF 150-315
GFHF 150-400



l-gfhf-p-en_a_mo

REF. N.	PART	MATERIAL	REFERENCE STANDARDS	
			EUROPE	USA
1	Pump body	Cast iron	EN 1561-GJL-250 (JL1040)	ASTM Class 35
2	Seal housing	Cast iron	EN 1561-GJL-250 (JL1040)	ASTM Class 35
3	Impeller	Cast iron	EN 1561-GJL-250 (JL1040)	ASTM Class 35
		Bronze	EN 1982-CuSn10-C (CC480K)	UNS C90700
4	Shaft extension	Stainless steel	EN 10088-1-X20Cr13 (1.4021)	AISI 420
5	Impeller lock nut and washer	Steel		
6	Tab	Steel	EN 10083-1-C45E (1.1191)	-
7	Fill and drain plugs	Steel		
8	Fill/drain plug seals	Asbestos-free synthetic fiber AFM34 ®		
9	Plugs for gauge connectors	Steel		
10	Mechanical seal	Silicon carbide / Carbon / EPDM (standard version)		
11	Elastomers	EPDM (standard version)		
12	Adapter	Cast iron	EN 1561-GJL-250 (JL1040)	ASTM Class 35
13	Support body	Cast iron	EN 1561-GJL-250 (JL1040)	ASTM Class 35
14	Pump body fastening bolts and screws	Steel		

l-fhf 65-150-en_c_tm

GFH MECHANICAL SEAL, ACCORDING TO EN 12756

Mechanical seal with mounting dimensions according to EN12756 (ex DIN 24960) and ISO 3069.
(A version with anti-rotation lockpin and/or external flushing are available on request.)

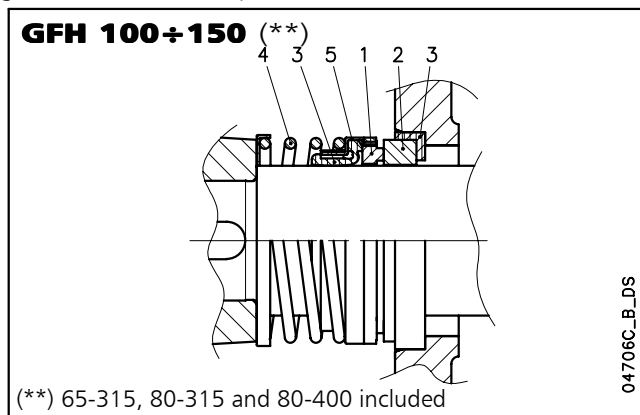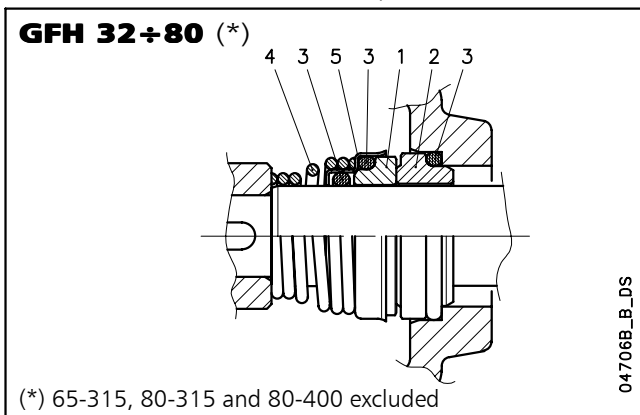

LIST OF MATERIALS

POSITION 1 - 2	POSITION 3	POSITION 4 - 5
B : Resin impregnated carbon	E : EPDM	G : AISI 316
Q ₁ : Silicon carbide	P : NBR	
V : Ceramic	V : FPM	


GFHE-GFHS-GFHF 32÷80 SEAL TYPE (65-315, 80-315 and 80-400 excluded) fh_ten-mec-en_a_tm

TYPE	POSITION					TEMPERATURE (°C)
	1 ROTATING ASSEMBLY	2 FIXED ASSEMBLY	3 ELASTOMERS	4 SPRINGS	5 OTHER COMPONENTS	
STANDARD MECHANICAL SEAL						
VBPGG	V	B	P	G	G	-20 +85
OTHER TYPES OF MECHANICAL SEAL						
VBVGG	V	B	V	G	G	-10 +120
Q ₁ BVGG	Q ₁	B	V	G	G	-10 +120
Q ₁ Q ₁ VGG	Q ₁	Q ₁	V	G	G	-10 +120
VBEGG	V	B	E	G	G	-30 +120
Q ₁ BEGG	Q ₁	B	E	G	G	-30 +120
Q ₁ Q ₁ EGG	Q ₁	Q ₁	E	G	G	-30 +120

GFHS-GFHF 100÷150 SEAL TYPE (65-315, 80-315 and 80-400 included) fh_tipi-ten-mec-en_a_tc

TYPE	POSITION					TEMPERATURE (°C)
	1 ROTATING ASSEMBLY	2 FIXED ASSEMBLY	3 ELASTOMERS	4 SPRINGS	5 OTHER COMPONENTS	
STANDARD MECHANICAL SEAL						
Q ₁ B E G G	Q ₁	B	E	G	G	-30 +120
OTHER TYPES OF MECHANICAL SEAL						
Q ₁ B V G G	Q ₁	B	V	G	G	-10 +120
Q ₁ Q ₁ V G G	Q ₁	Q ₁	V	G	G	-10 +120

PRESSURE / TEMPERATURE APPLICATION LIMITS FOR COMPLETE PUMP (WITH ANY OF THE SEALS LISTED ABOVE) lm-fh_tipi-ten-mec-en_a_tc

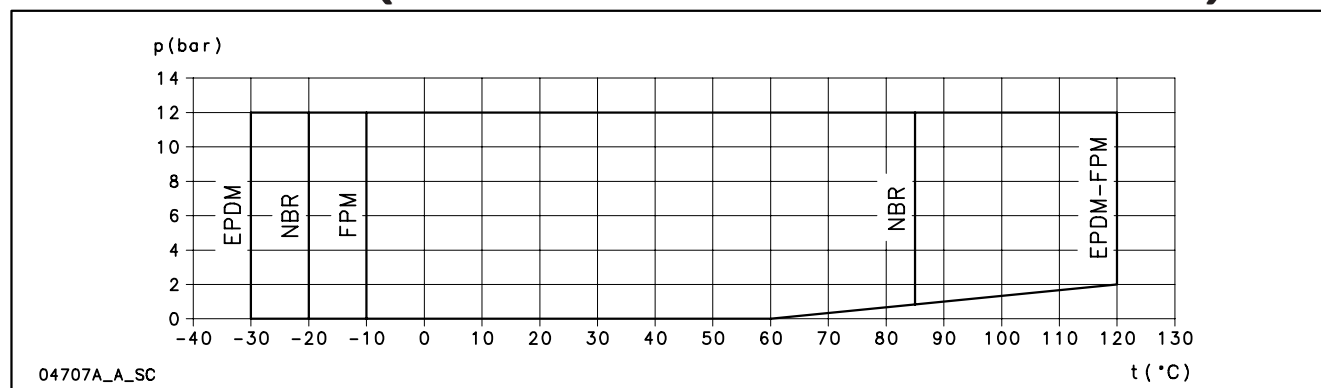

MOTORS FOR GFH SERIES

Standard supplied IE2/IE3 three-phase surface motors $\geq 0,75$ kW are compliant with Regulation (EC) no. 640/2009 and IEC 60034-30.

Enclosed short circuit squirrel cage motor (TEFC), with external ventilation.

Electrical performances according to EN 60034-1.

Insulation class 155 (F).

IP55 protection.

Condensate drain plugs on standard version.

Cooling by fan according to EN 60034-6.

Cable gland metric size according to EN 50262.

Standard voltage:

- **Single-phase** version: 220-230 V 60 Hz, with incorporated automatic-reset overload protection up to 1,5 kW.
- **Three-phase** version : 220-380 V 60 Hz. Overload protection to be provided by the user.

GFHE SERIES SINGLE-PHASE MOTORS AT 60 Hz, 2 POLES

P _N kW	MOTOR TYPE	IEC SIZE*	Construction Design	INPUT CURRENT	CAPACITOR		DATA FOR 220 V 50 Hz VOLTAGE						
				I _n (A) 220-230 V	μF	V	min ⁻¹	I _s / I _n	η %	cosφ	T _n Nm	T _s /T _n	T _m /T _n
1,1	SM90RB14S/1116	90R	SPECIAL	6,94-6,89	30	450	3435	4,54	74,2	0,97	3,06	0,62	2,03
1,5	SM90RB14S/1156	90R		9,28-9,35	40	450	3455	4,91	76,3	0,96	4,14	0,49	2,19
2,2	PLM90B14S/1226	90		12,3-11,7	60	450	3455	4,99	83,4	0,98	6,08	0,54	2,06

* R = Reduced size of motor casing as compared to shaft extension and flange.

fhe-motm-2p60-en_c_te

GFHE SERIES

THREE-PHASE MOTORS AT 60 Hz, 2 POLES

P _N kW	Efficiency η_N %												IE	Year of manufacture	
	Δ 220 V Y 380 V			Δ 230 V Y 400 V			Δ 380 V Y 660 V			Δ 400 V Y 690 V					
	4/4	3/4	2/4	4/4	3/4	2/4	4/4	3/4	2/4	4/4	3/4	2/4			
1,1	85,6	85,0	82,1	85,6	85,0	82,1	85,6	85,0	82,1	85,6	85,0	82,1	3	By June 2011	
1,5	87,2	87,0	84,6	87,2	87,0	84,6	87,2	87,0	84,6	87,2	87,0	84,6			
2,2	85,5	85,5	84,5	85,5	85,5	84,5	85,5	85,5	84,5	85,5	85,5	84,5	2		By June 2011
3	87,8	88,0	86,0	87,8	88,0	86,0	87,8	88,0	86,0	87,8	88,0	86,0			
4	87,5	87,5	86,8	87,5	87,5	86,8	87,5	87,5	86,8	87,5	87,5	86,8			
5,5	88,5	88,5	88,5	88,5	88,5	88,5	88,5	88,5	88,5	88,5	88,5	88,5			
7,5	89,5	89,5	88,5	89,5	89,5	88,5	89,5	89,5	88,5	89,5	89,5	88,5			
9,2	89,5	89,5	89,5	89,5	89,5	89,5	89,5	89,5	89,5	89,5	89,5	89,5			
11	90,2	90,2	89,7	90,2	90,2	89,7	90,2	90,2	89,7	90,2	90,2	89,7			
15	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2			
18,5	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0			
22	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0			

P _N kW	Manufacturer	IEC SIZE*	Construction Design	N. of Poles	f _N Hz	Data for 380 V / 60 Hz Voltage				
	XYLEM WATER SYSTEMS USA LLC 1 Goulds Drive - Auburn NY 13021 – U.S.A.									
	Model					cosφ	Is / I _N	T _N Nm	Ts/T _N	Tm/T _N
1,1	SM90RB14S/311PE	90R	SPECIAL	2	60	0,80	9,11	3,01	4,15	4,29
1,5	SM90RB14S/315PE	90R				0,82	9,79	4,10	4,36	4,37
2,2	PLM90B14S/322	90				0,83	9,59	6,00	3,80	4,02
3	PLM90B14S/330	90				0,84	9,12	8,22	3,52	3,65
4	PLM112RB14S/340	112R				0,87	10,0	10,9	2,82	4,58
5,5	PLM112B14S/355	112				0,89	11,4	15,0	4,28	5,80
7,5	PLM132B14S/375	132				0,88	9,83	20,3	3,21	4,68
9,2	PLM132B14S/392	132				0,89	10,2	24,9	3,11	4,78
11	PLM132B14S/3110	132				0,88	10,2	29,8	3,43	4,51
15	PLM160B34S/3150	160				0,91	8,60	40,4	2,24	3,84
18,5	PLM160B34S/3185	160				0,89	9,97	49,7	2,78	4,59
22	PLM160B34S/3220	160				0,91	9,64	59,2	2,76	4,25

P _N kW	Voltage U _N V								n _N min ⁻¹	Observe the regulations and codes locally in force regarding sorted waste disposal.	Operating conditions **		
	Δ		Y		Δ		Y				Altitude above sea Level (m)	T. amb min/max °C	ATEX
	220 V	230 V	380 V	400 V	380 V	400 V	660 V	690 V					
	I _N (A)												
1,1	4,24	4,24	2,45	2,45	2,44	2,43	1,41	1,40	3490 ÷ 3505	≤ 1000	-15 / 40	No	
1,5	5,58	5,53	3,22	3,19	3,23	3,22	1,86	1,86	3485 ÷ 3505				
2,2	8,14	8,12	4,70	4,69	4,69	4,68	2,71	2,70	3495 ÷ 3505				
3	10,7	10,5	6,19	6,06	6,20	6,11	3,58	3,53	3480 ÷ 3495				
4	13,5	13,5	7,82	7,77	7,84	7,77	4,52	4,49	3510 ÷ 3520				
5,5	18,2	18,1	10,5	10,4	10,5	10,4	6,07	6,02	3505 ÷ 3515				
7,5	25,2	24,7	14,6	14,3	14,6	14,1	8,40	8,16	3525 ÷ 3535				
9,2	30,2	29,6	17,5	17,1	17,5	17,1	10,1	9,86	3525 ÷ 3530				
11	36,1	35,2	20,8	20,3	21,1	20,7	12,2	12,0	3520 ÷ 3540				
15	47,1	45,6	27,2	26,4	27,3	26,3	15,8	15,2	3545 ÷ 3550				
18,5	59,2	58,2	34,2	33,6	34,3	33,6	19,8	19,4	3550 ÷ 3555				
22	69,1	67,4	39,9	38,9	39,8	38,2	23,0	22,0	3545 ÷ 3555				

* R = Reduced size of motor casing as compared to shaft extension and flange.

gfhe-ie2-mott-2p60-en_b_te

** Operating conditions to be referred to motor only. About electric pump, refer to limits in user's manual.

GFHS SERIES

THREE-PHASE MOTORS AT 60 Hz, 2 POLES

P _N kW	Efficiency η _N %												Year of manufacture	
	Δ 220 V Y 380 V			Δ 230 V Y 400 V			Δ 380 V Y 660 V			Δ 400 V Y 690 V				IE
	4/4	3/4	2/4	4/4	3/4	2/4	4/4	3/4	2/4	4/4	3/4	2/4		
1,1	85,6	85,0	82,1	85,6	85,0	82,1	85,6	85,0	82,1	85,6	85,0	82,1	3	By June 2011
1,5	87,2	87,0	84,6	87,2	87,0	84,6	87,2	87,0	84,6	87,2	87,0	84,6		
2,2	85,5	85,5	84,5	85,5	85,5	84,5	85,5	85,5	84,5	85,5	85,5	84,5	2	
3	87,8	88,0	86,0	87,8	88,0	86,0	87,8	88,0	86,0	87,8	88,0	86,0		
4	87,5	87,5	86,8	87,5	87,5	86,8	87,5	87,5	86,8	87,5	87,5	86,8		
5,5	88,5	88,5	88,5	88,5	88,5	88,5	88,5	88,5	88,5	88,5	88,5	88,5		
7,5	89,5	89,5	88,5	89,5	89,5	88,5	89,5	89,5	88,5	89,5	89,5	88,5		
11	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2		
15	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2		
18,5	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0		
22	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0		

P _N kW	Manufacturer		IEC SIZE*	Construction Design	N. of Poles	f _N Hz	Data for 380 V / 60 Hz Voltage				
	XYLEM WATER SYSTEMS USA LLC 1 Goulds Drive - Auburn NY 13021 – U.S.A.						cosφ	I _s / I _N	T _N Nm	Ts/T _N	Tm/T _N
	Model										
1,1	SM80B5/311PE		80	B5	2	60	0,80	9,11	3,01	4,15	4,29
1,5	SM90RB5/315PE		90R				0,82	9,79	4,10	4,36	4,37
2,2	PLM90B5/322		90				0,83	9,59	6,00	3,80	4,02
3	PLM100RB5/330		100R				0,84	9,12	8,22	3,52	3,65
4	PLM112RB5/340		112R				0,87	10,0	10,9	2,82	4,58
5,5	PLM132RB5/355		132R				0,89	11,4	15,0	4,28	5,80
7,5	PLM132B5/375		132	B35			0,88	9,83	20,3	3,21	4,68
11	PLM160B35/3110		160				0,89	8,85	29,6	2,44	4,20
15	PLM160B35/3150		160				0,91	8,60	40,4	2,24	3,84
18,5	PLM160B35/3185		160				0,89	9,97	49,7	2,78	4,59
22	PLM180RB35/3220		180R				0,91	9,64	59,2	2,76	4,25

P _N kW	Voltage U _N V								n _N min ⁻¹	Observe the regulations and codes locally in force regarding sorted waste disposal.	Operating conditions **		
	Δ		Y		Δ		Y				Altitude above sea Level (m)	T. amb min/max °C	ATEX
	220 V	230 V	380 V	400 V	380 V	400 V	660 V	690 V					
	I _N (A)												
1,1	4,24	4,24	2,45	2,45	2,44	2,43	1,41	1,40	3490 ÷ 3505		≤ 1000	-15 / 40	No
1,5	5,58	5,53	3,22	3,19	3,23	3,22	1,86	1,86	3485 ÷ 3505				
2,2	8,14	8,12	4,70	4,69	4,69	4,68	2,71	2,70	3495 ÷ 3505				
3	10,7	10,5	6,19	6,06	6,20	6,11	3,58	3,53	3480 ÷ 3495				
4	13,5	13,5	7,82	7,77	7,84	7,77	4,52	4,49	3510 ÷ 3520				
5,5	18,2	18,1	10,5	10,4	10,5	10,4	6,07	6,02	3505 ÷ 3515				
7,5	25,2	24,7	14,6	14,3	14,6	14,1	8,40	8,16	3525 ÷ 3535				
11	36,0	35,1	20,8	20,3	20,8	20,1	12,0	11,6	3545 ÷ 3550				
15	47,1	45,6	27,2	26,4	27,3	26,3	15,8	15,2	3545 ÷ 3550				
18,5	59,2	58,2	34,2	33,6	34,3	33,6	19,8	19,4	3550 ÷ 3555				
22	69,1	67,4	39,9	38,9	39,8	38,2	23,0	22,0	3545 ÷ 3555				

* R = Reduced size of motor casing as compared to shaft extension and flange.

gfhs-ie2-mott-2p60-en_b_te

** Operating conditions to be referred to motor only. About electric pump, refer to limits in user's manual.

GFHF SERIES

THREE-PHASE MOTORS AT 60 Hz, 2 POLES (up to 18,5 kW)

P _N kW	Efficiency η_N %												Year of manufacture	
	Δ 220 V Y 380 V			Δ 230 V Y 400 V			Δ 380 V Y 660 V			Δ 400 V Y 690 V				IE
	4/4	3/4	2/4	4/4	3/4	2/4	4/4	3/4	2/4	4/4	3/4	2/4		
1,1	85,6	85,0	82,1	85,6	85,0	82,1	85,6	85,0	82,1	85,6	85,0	82,1	3	By June 2011
1,5	84,0	84,0	83,3	84,0	84,0	83,3	84,0	84,0	83,3	84,0	84,0	83,3	2	
2,2	85,5	85,5	84,5	85,5	85,5	84,5	85,5	85,5	84,5	85,5	85,5	84,5		
3	87,5	87,5	86,8	87,5	87,5	86,8	87,5	87,5	86,8	87,5	87,5	86,8		
4	87,5	87,5	87,5	87,5	87,5	87,5	87,5	87,5	87,5	87,5	87,5	87,5		
5,5	88,5	88,5	87,2	88,5	88,5	87,2	88,5	88,5	87,2	88,5	88,5	87,2		
7,5	89,5	89,5	88,5	89,5	89,5	88,5	89,5	89,5	88,5	89,5	89,5	88,5		
11	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2		
15	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2	90,2		
18,5	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0		

P _N kW	Manufacturer		IEC SIZE	Construction Design	N. of Poles	f _N Hz	Data for 380 V / 60 Hz Voltage				
	XYLEM WATER SYSTEMS USA LLC 1 Goulds Drive - Auburn NY 13021 – U.S.A.						cosφ	Is / I _N	T _N Nm	Ts/T _N	Tm/T _N
	Model										
1,1	SM80B3/311PE		80	B3	2	60	0,80	9,11	3,01	4,15	4,29
1,5	PLM90B3/315		90				0,86	8,86	4,10	3,24	3,48
2,2	PLM90B3/322		90				0,83	9,59	6,00	3,80	4,02
3	PLM100B3/330		100				0,86	10,2	8,15	3,27	3,61
4	PLM112B3/340		112				0,88	10,3	10,9	3,54	4,61
5,5	PLM132B3/355		132				0,86	10,4	14,8	3,23	4,81
7,5	PLM132B3/375		132				0,88	9,83	20,3	3,21	4,68
11	PLM160B3/3110		160				0,89	8,85	29,6	2,44	4,20
15	PLM160B3/3150		160				0,91	8,60	40,4	2,24	3,84
18,5	PLM160B3/3185		160				0,89	9,97	49,7	2,78	4,59

P _N kW	Voltage U _N V								n _N min ⁻¹	Observe the regulations and codes locally in force regarding sorted waste disposal.	Operating conditions **		
	Δ		Y		Δ		Y				Altitude above sea Level (m)	T. amb min/max °C	ATEX
	220 V	230 V	380 V	400 V	380 V	400 V	660 V	690 V					
	I _N (A)												
1,1	4,24	4,24	2,45	2,45	2,44	2,43	1,41	1,40	3490 ÷ 3505	≤ 1000	-15 / 40	No	
1,5	5,21	5,08	3,01	2,93	3,00	2,94	1,73	1,70	3490 ÷ 3505				
2,2	8,14	8,12	4,70	4,69	4,69	4,68	2,71	2,70	3495 ÷ 3505				
3	10,6	10,6	6,06	6,11	6,03	5,98	3,48	3,45	3510 ÷ 3520				
4	13,3	13,0	7,66	7,52	7,66	7,49	4,42	4,33	3495 ÷ 3510				
5,5	19,1	19,1	11,1	11,0	11,1	11,0	6,39	6,34	3535 ÷ 3540				
7,5	25,2	24,7	14,6	14,3	14,6	14,1	8,40	8,16	3525 ÷ 3535				
11	36,0	35,1	20,8	20,3	20,8	20,1	12,0	11,6	3545 ÷ 3550				
15	47,1	45,6	27,2	26,4	27,3	26,3	15,8	15,2	3545 ÷ 3550				
18,5	59,2	58,2	34,2	33,6	34,3	33,6	19,8	19,4	3550 ÷ 3555				

** Operating conditions to be referred to motor only. About electric pump, refer to limits in user's manual.

ghfh-ie2-mott-2p60-en_b_te

GFHF SERIES

THREE-PHASE MOTORS AT 60 Hz, 2 POLES (from 22 to 90 kW)

P _N kW	Efficiency η_N %			IE	Year of manufacture
	Δ 220 V Y 380 V				
	4/4	3/4	2/4		
22	92,0	92,0	91,8	2	By June 2011
30	92,4	92,4	91,5		
37	92,4	92,4	92,0		
45	93,5	93,0	91,8		
55	93,5	93,5	92,8		
75	93,6	93,6	92,2		
90	94,6	94,3	92,8		

P _N kW	Manufacturer	IEC SIZE	Construction Design	N. of Poles	f _N Hz	Data for 380 V / 60 Hz Voltage				
	WEG Equipamentos Eletricos S.A Reg. No. 07.175.725/0010-50 Jaragua do Sul - SC (Brazil)					cosφ	Is / I _N	T _N Nm	Ts/T _N	Tm/Tn
	Model									
22	W22 180L2-B3 22kW	180	B3	2	60	0,87	7,00	59,30	1,90	2,80
30	W22 200L2-B3 30kW	200	B35			0,86	6,40	80,65	2,10	2,40
37	W22 200L2-B3 37kW	200				0,86	7,20	98,98	2,40	2,60
45	W22 225S/M2-B3 45kW	225				0,89	7,80	120,5	2,20	2,90
55	W22 250S/M2-B3 55kW	250	0,89			7,70	147,0	2,20	2,80	
75	W22 280S/M2-B3 75kW	280	B3			0,88	7,70	199,9	1,90	2,80
90	W22 280S/M2-B3 90kW	280				0,88	7,70	240,1	2,00	2,90

P _N kW	Voltage U _N V		n _N min ⁻¹	Observe the regulations and codes locally in force regarding sorted waste disposal.	Operating conditions **		
	Δ	Y			Altitude above sea Level (m)	T. amb min/max °C	ATEX
	220 V	380 V					
	I _N (A)						
22	72,20	41,80	3535		≤ 1000	-15 / 40	No
30	99,00	57,30	3550				
37	122,00	70,70	3555				
45	142,00	82,20	3560				
55	173,00	100,00	3560				
75	238,00	138,00	3575				
90	284,00	164,00	3575				

** Operating conditions to be referred to motor only. About electric pump, refer to limits in user's manual.

fhf-ie2-mott-90-2p60-en_a_te

GFHE4 SERIES

THREE-PHASE MOTORS AT 60 Hz, 4 POLES

P _N kW	Efficiency η_N %												Year of construction		
	Δ 220 V Y 380 V			Δ 230 V Y 400 V			Δ 380 V Y 660 V			Δ 400 V Y 690 V				IE	
	4/4	3/4	2/4	4/4	3/4	2/4	4/4	3/4	2/4	4/4	3/4	2/4			
0,25	-	-	-	-	-	-	-	-	-	-	-	-	-	2	By June 2011
0,37	-	-	-	-	-	-	-	-	-	-	-	-	-		
0,55	-	-	-	-	-	-	-	-	-	-	-	-	-		
0,75	83,2	82,3	78,4	83,2	82,3	78,4	83,2	82,3	78,4	83,2	82,3	78,4			
1,1	84,0	84,0	81,0	84,0	84,0	81,0	84,0	84,0	81,0	84,0	84,0	81,0			
1,5	84,5	84,5	82,5	84,5	84,5	82,5	84,5	84,5	82,5	84,5	84,5	82,5			
2,2	87,5	87,5	85,7	87,5	87,5	85,7	87,5	87,5	85,7	87,5	87,5	85,7			
3	87,5	87,5	84,7	87,5	87,5	84,7	87,5	87,5	84,7	87,5	87,5	84,7			
4	87,9	87,9	87,6	87,9	87,9	87,6	87,9	87,9	87,6	87,9	87,9	87,6			
5,5	89,5	89,5	88,7	89,5	89,5	88,7	89,5	89,5	88,7	89,5	89,5	88,7			
7,5	89,5	89,5	89,2	89,5	89,5	89,2	89,5	89,5	89,2	89,5	89,5	89,2			

P _N kW	Manufacturer	IEC SIZE*	Construction Design	N. of Poles	f _N Hz	Data for 380 V / 60 Hz				
	XYLEM WATER SYSTEMS USA LLC 1 Goulds Drive - Auburn NY 13021 – U.S.A.									
	Model					cosφ	Is / I _N	TN Nm	Ts/T _N	Tm/T _N
0,25	SM471B5/302	71	B5	4	60	0,68	3,45	1,45	2,37	2,15
0,37	SM471B5/304	71				0,68	3,52	2,17	2,65	2,05
0,55	SM490RB14S/305	90R	SPECIAL			0,77	3,55	3,18	1,80	1,90
0,75	LLM490RB14S/307	90R				0,75	6,26	4,14	2,82	3,53
1,1	PLM490B5S/311	90				0,71	6,70	6,01	2,57	3,60
1,5	PLM490B5S/315	90				0,68	7,19	8,18	3,04	3,74
2,2	PLM4100B5S/322	100				0,76	8,01	12,0	2,69	4,33
3	PLM4100B5S/330	100				0,72	8,19	16,3	2,98	4,28
4	PLM4112B5S/340	112				0,78	8,48	21,8	3,01	4,22
5,5	PLM4132B14S/355	132				0,78	7,85	29,8	2,61	3,48
7,5	PLM4132B14S/375	132				0,79	7,84	40,8	2,43	3,59

P _N kW	Voltage U _N V								η _N min ⁻¹	Observe the regulations and codes locally in force regarding sorted waste disposal.	Operating conditions **		
	Δ		Y		Δ		Y				Altitude above sea Level (m)	T. amb min/max °C	ATEX
	220 V	230 V	380 V	400 V	380 V	400 V	660 V	690 V					
	I _N (A)												
0,25	1,51		0,87						1650		1000 VI	-15 / 40	No
0,37	2,18		1,26						1630				
0,55	2,74		1,58						1650				
0,75	3,15	3,13	1,82	1,81	1,81	1,80	1,05	1,04	1730 ÷ 1735				
1,1	4,78	4,80	2,76	2,77	2,74	2,74	1,58	1,58	1745 ÷ 1750				
1,5	6,69	6,77	3,86	3,91	3,87	3,92	2,23	2,26	1750 ÷ 1755				
2,2	8,6	8,57	4,98	4,95	4,95	4,92	2,86	2,84	1755 ÷ 1760				
3	12,5	12,6	7,20	7,26	7,00	7,02	4,04	4,05	1760 ÷ 1765				
4	15,3	15,2	8,82	8,78	8,80	8,72	5,08	5,03	1755 ÷ 1755				
5,5	20,9	20,6	12,1	11,9	12,2	12,0	7,04	6,91	1760 ÷ 1765				
7,5	27,9	27,6	16,1	15,9	16,2	16,0	9,34	9,21	1750 ÷ 1755				

* R = Reduced size of motor casing as compared to shaft extension and flange.

gfhe4-ie2-mott-4p60-en_a_te

** Operating conditions to be referred to motor only. About electric pump, refer to limits in user's manual.

GFHS4-GFHF4 SERIES

THREE-PHASE MOTORS AT 60 Hz, 4 POLES (up to 15 kW)

P _N kW	Efficiency η_N %												Year of construction		
	Δ 220 V Y 380 V			Δ 230 V Y 400 V			Δ 380 V Y 660 V			Δ 400 V Y 690 V				IE	
	4/4	3/4	2/4	4/4	3/4	2/4	4/4	3/4	2/4	4/4	3/4	2/4			
0,25	-	-	-	-	-	-	-	-	-	-	-	-	-	2	By June 2011
0,37	-	-	-	-	-	-	-	-	-	-	-	-	-		
0,55	-	-	-	-	-	-	-	-	-	-	-	-	-		
0,75	83,2	82,3	78,4	83,2	82,3	78,4	83,2	82,3	78,4	83,2	82,3	78,4			
1,1	84,0	84,0	81,0	84,0	84,0	81,0	84,0	84,0	81,0	84,0	84,0	81,0			
1,5	84,5	84,5	82,5	84,5	84,5	82,5	84,5	84,5	82,5	84,5	84,5	82,5			
2,2	87,5	87,5	85,7	87,5	87,5	85,7	87,5	87,5	85,7	87,5	87,5	85,7			
3	87,5	87,5	84,7	87,5	87,5	84,7	87,5	87,5	84,7	87,5	87,5	84,7			
4	87,9	87,9	87,6	87,9	87,9	87,6	87,9	87,9	87,6	87,9	87,9	87,6			
5,5	89,5	89,5	88,7	89,5	89,5	88,7	89,5	89,5	88,7	89,5	89,5	88,7			
7,5	89,5	89,5	89,2	89,5	89,5	89,2	89,5	89,5	89,2	89,5	89,5	89,2			
11	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0	91,0			
15	91,0	91,0	90,4	91,0	91,0	90,4	91,0	91,0	90,4	91,0	91,0	90,4			

P _N kW	Manufacturer	IEC SIZE	Construction Design	N. of Poles	f _N Hz	Data for 380 V / 60 Hz				
	XYLEM WATER SYSTEMS USA LLC 1 Goulds Drive - Auburn NY 13021 – U.S.A.									
	Model					cosφ	Is / I _N	TN Nm	Ts/T _N	Tm/T _N
0,25	SM471B3/302	71	B3	4	60	0,68	3,45	1,45	2,37	2,15
0,37	SM471B3/304	71				0,68	3,52	2,17	2,65	2,05
0,55	SM480B3 (B5) /305	80	B3 / B5			0,77	3,55	3,18	1,80	1,90
0,75	LLM480B3 (B5) /307	80				0,75	6,26	4,14	2,82	3,53
1,1	PLM490B3 (B5) /311	90				0,71	6,70	6,01	2,57	3,60
1,5	PLM490B3 (B5) /315	90				0,68	7,19	8,18	3,04	3,74
2,2	PLM4100B3 (B5) /322	100				0,76	8,01	12,0	2,69	4,33
3	PLM4100B3 (B5) /330	100				0,72	8,19	16,3	2,98	4,28
4	PLM4112B3 (B5) /340	112				0,78	8,48	21,8	3,01	4,22
5,5	PLM4132B3 (B5) /355	132				0,78	7,85	29,8	2,61	3,48
7,5	PLM4132B3 (B5) /375	132				0,79	7,84	40,8	2,43	3,59
11	PLM4160B3 (B5) /3110	160				0,85	7,25	59,4	2,27	3,07
15	PLM4160B3 (B5) /3150	160				0,82	8,17	80,7	2,65	3,64

P _N kW	Voltage U _N V								η _N min ⁻¹	Observe the regulations and codes locally in force regarding sorted waste disposal.	Operating conditions **		
	Δ		Y		Δ		Y				Altitude above sea Level (m)	T. amb min/max °C	ATEX
	220 V	230 V	380 V	400 V	380 V	400 V	660 V	690 V					
	I _N (A)												
0,25	1,51		0,87						1650	≤ 1000	-15 / 40	No	
0,37	2,18		1,26						1630				
0,55	2,74		1,58						1650				
0,75	3,15	3,13	1,82	1,81	1,81	1,80	1,05	1,04	1730 ÷ 1735				
1,1	4,78	4,80	2,76	2,77	2,74	2,74	1,58	1,58	1745 ÷ 1750				
1,5	6,69	6,77	3,86	3,91	3,87	3,92	2,23	2,26	1750 ÷ 1755				
2,2	8,6	8,57	4,98	4,95	4,95	4,92	2,86	2,84	1755 ÷ 1760				
3	12,5	12,6	7,20	7,26	7,00	7,02	4,04	4,05	1760 ÷ 1765				
4	15,3	15,2	8,82	8,78	8,80	8,72	5,08	5,03	1755 ÷ 1755				
5,5	20,9	20,6	12,1	11,9	12,2	12,0	7,04	6,91	1760 ÷ 1765				
7,5	27,9	27,6	16,1	15,9	16,2	16,0	9,34	9,21	1750 ÷ 1755				
11	37,9	37,9	21,9	21,9	21,9	21,5	12,6	12,4	1765 ÷ 1770				
15	52,9	53,4	30,6	30,8	30,2	29,9	17,4	17,3	1770 ÷ 1775				

** Operating conditions to be referred to motor only. About electric pump, refer to limits in user's manual.

gfhs4-ie2-mott-4p60-en_a_te

GFHS4-GFHF4 SERIES

THREE-PHASE MOTORS AT 60 Hz, 4 POLES (from 18,5 to 75 kW)

P _N kW	Efficiency η_N %						IE	Year of construction
	Δ 220 V Y 380 V			Δ 230 V Y 400 V				
	4/4	3/4	2/4	4/4	3/4	2/4		
18,5	92,8	92,8	92,0	92,8	92,8	92,0	2	By June 2011
22	93,0	92,8	92,5	93,0	92,8	92,5		
30	93,4	93,2	92,7	93,4	93,2	92,7		
37	93,6	93,2	93	93,6	93,2	93		
45	94,1	93,7	93,5	94,1	93,7	93,5		
55	94,4	94,2	93,9	94,4	94,2	93,9		
75	94,6	94,5	94,0	94,6	94,5	94,0		

P _N kW	Manufacturer	IEC SIZE	Construction Design	N. of Poles	f _N Hz	Data for 380 V / 60 Hz				
	WEG Equipamentos Eletricos S.A. Reg. No 07.175.725/0010-50 Jaragua do Sul - SC (Brazil)									
	Model					cosφ	Is / I _N	TN Nm	Ts/T _N	Tm/T _N
18,5	W22 180M4-B3 18.5kW	180	B5 B3	4	60	0,81	6,80	100,0	2,70	3,00
22	W22 180M4-B3 22kW	180				0,84	6,40	119,0	2,30	2,70
30	W22 200L4-B3 30kW	200				0,85	6,20	162,0	2,00	2,30
37	W22 225S7M4-B3 37kW	225	B3			0,85	6,20	200,0	2,50	2,60
45	W22 225S/M4-B3 45kW	225				0,86	7,20	242,0	2,40	2,60
55	W22 250S/M4-B3 55kW	250				0,87	7,20	296,0	2,40	2,60
75	W22 280S/M4-B3 75kW	280				0,87	7,20	404,0	2,40	2,80

P _N kW	Voltage U _N V				η _N min ⁻¹	Observe the regulations and codes locally in force regarding sorted waste disposal.	Operating conditions **		
	Δ		Y				Altitude above sea Level (m)	T. amb min/max °C	ATEX
	220 V	230 V	380 V	400 V					
	I _N (A)								
18,5	64,60	61,80	37,40	35,54	1765 ÷ 1765		≤ 1000 VI	-15 / 40	No
22	74,00	70,80	42,84	40,71	1765 ÷ 1765				
30	99,20	94,90	57,43	54,57	1770 ÷ 1770				
37	122,00	117,0	70,63	67,28	1770 ÷ 1770				
45	146,00	140,0	84,53	80,50	1775 ÷ 1775				
55	176,00	168,0	101,89	96,60	1775 ÷ 1775				
75	240,00	230,0	138,95	132,25	1775 ÷ 1775				

** Operating conditions to be referred to motor only. About electric pump, refer to limits in user's manual.

fhf4-ie2-mott-75-4p60-en_a_te

MOTOR NOISE

The tables show the mean sound pressure (Lp) measured as per Curve A (Standard ISO 1680). Noise values were measured with the 60 Hz motor running idle with a tolerance of 3 dB (A).

GFHE-GFHS MOTORS 2 POLES 60 Hz

POWER	MOTOR TYPE	NOISE
kW	IEC* SIZE	LpA dB
1,1	90R	<70
1,5	90R	<70
2,2	90R	<70
3	90	<70
4	112R	<70
5,5	112	<70
7,5	112	75
9,2	132	77
11	132	77
15	160	74
18,5	160	75
22	160	73
30	200	74
37	200	74
45	225	79
55	250	79

GFHF MOTORS 2 POLES 60 Hz

POWER	MOTOR TYPE	NOISE
kW	IEC SIZE	LpA dB
1,1	80	<70
1,5	90	<70
2,2	90	<70
3	100	<70
4	112	<70
5,5	132	<70
7,5	132	75
11	160	74
15	160	74
18,5	160	75
22	180	72
30	200	74
37	200	74
45	225	79
55	250	79
75	280	81
90	280	81

GFHE4 MOTORS 4 POLES 60 Hz

POWER	MOTOR TYPE	NOISE
kW	IEC* SIZE	LpA dB
0,25	71	<70
0,37	71	<70
0,55	90R	<70
0,75	90R	<70
1,1	90	<70
1,5	90	<70
2,2	100	<70
3	100	<70
4	112	<70
5,5	132	<70
7,5	132	<70

GFHS4-GFHF4 MOTORS 4 POLES 60 Hz

POWER	MOTOR TYPE	NOISE
kW	IEC SIZE	LpA dB
0,25	71	<70
0,37	71	<70
0,55	80	<70
0,75	80	<70
1,1	90	<70
1,5	90	<70
2,2	100	<70
3	100	<70
4	112	<70
5,5	132	<70
7,5	132	<70
11	160	<70
15	160	<70
18,5	180	<70
22	180	<70
30	200	<70
37	225	<70
45	225	<70
55	250	<70
75	280	73

*R=reduced motor casing size with respect to shaft extension and related flange.

fh_fh_mott-60hz-en_c_tr

AVAILABLE VOLTAGES MOTORS FOR GFH SERIES (up to 22 kW)

P _N kW	IEC SIZE	SINGLE-PHASE								P _N kW	THREE-PHASE - 2 POLES																			
		50 Hz			60 Hz						50 Hz								60 Hz				50/60 Hz							
		1 x 220-240	1 x 100	1 x 110-120	1 x 220-230	1 x 100	1x 110-115	1 x 120-127	1 x 200-210		3 x 220-230-240/380-400-415	3 x 380-400-415/660-690	3 x 200-208/346-360	3 x 255-265/440-460	3 x 290-300/500-525	3 x 440-460/-	3 x 500-525/-	3 x 220-230/380-400	3 x 255-265-277/440-460-480	3 x 380-400/660-690	3 x 440-460-480/-	3 x 110-115/190-200	3 x 200-208/346-360	3 x 330-346/575-600	3 x 575/-	3 x 230/400 50 Hz	3 x 265/460 60 Hz	3 x 400/690 50 Hz	3 x 460/- 60 Hz	
0,75	80	s	-	o	s	-	o	-	o	0,75	s	o	o	o	o	o	o	s	o	o	o	o	o	o	o	o	o	o	o	o
1,1	80	s	-	o	s	-	o	-	o	1,1	s	o	o	o	o	o	o	s	o	o	o	o	o	o	o	o	o	o	o	o
1,5	80	s	-	-	s	-	o	-	o	1,5	s	o	o	o	o	o	o	s	o	o	o	o	o	o	o	o	o	o	o	o
2,2	90	s	-	-	s	-	-	-	-	2,2	s	o	o	o	o	o	o	s	o	o	o	o	o	o	o	o	o	o	o	o
										3	s	o	o	o	o	o	o	s	o	o	o	o	o	o	o	o	o	o	o	o
										4	o	s	o	o	o	o	o	s	o	o	o	o	o	o	o	o	o	o	o	o
										5,5	o	s	o	o	o	o	o	s	o	o	o	o	o	o	o	o	o	o	o	o
										7,5	o	s	o	o	o	o	o	s	o	o	o	o	o	o	o	o	o	o	o	o
										9,2	o	s	o	o	o	o	o	s	o	o	o	o	o	o	o	o	o	o	o	o
										11	o	s	o	o	o	o	o	s	o	o	o	o	o	o	o	o	o	o	o	o
										15	o	s	o	o	o	o	o	s	o	o	o	o	o	o	o	o	o	o	o	o
										18,5	o	s	o	o	o	o	o	s	o	o	o	o	o	o	o	o	o	o	o	o
										22	o	s	o	o	o	o	o	s	o	o	o	o	o	o	o	o	o	o	o	o

s = Standard voltage o = Optional voltage

- = Not available

fh-volt-lowa-en_a_te

MOTORS FOR GFH SERIES (≥ 22 kW)

PN kW	THREE-PHASE - 2 POLES																	
	50 Hz								60 Hz								50/60 Hz	
	3 x 220-230-240/380-400-415	3 x 380-400-415/660-690	3 x 110/190	3 x 200-208/346-360	3 x 255-265/440-460	3 x 290-300/500-525	3 x 440-460/-	3 x 500-525/-	3 x 230/380	3 x 380-400/660-690	3 x 440-480/-	3 x 110-115/190-200	3 x 200-208/346-360	3 x 255-265-277/440-460-480	3 x 330-346/575-600	3 x 575/-	3 x 230/400 50 Hz 3 x 265/460 60 Hz	3 x 400/690 50 Hz 3 x 460/- 60 Hz
22	o	s	o	o	o	o	o	o	s	o	o	o	o	o	o	o	o	o
30	o	s	o	o	o	o	o	o	s	o	o	o	o	o	o	o	o	o
37	o	s	o	o	o	o	o	o	s	o	o	o	o	o	o	o	o	o
45	o	s	o	o	o	o	o	o	s	o	o	o	o	o	o	o	o	o
55	o	s	o	o	o	o	o	o	s	o	o	o	o	o	o	o	o	o
75	o	s	o	o	o	o	o	o	s	o	o	o	o	o	o	o	o	o
90	o	s	-	o	o	o	o	o	s	o	o	-	o	o	o	o	o	o
110	o	s	-	o	o	o	o	o	s	o	o	-	o	o	o	o	o	o
132	o	s	-	o	o	o	o	o	s	o	o	-	o	o	o	o	o	o


s = Standard voltage

o = Optional voltage

- = Not available

fh-volt-weg-en_b_te

GFHE-2GFHE-GFHS-GFHF SERIES **HYDRAULIC PERFORMANCE RANGE AT 60 Hz, 2 POLES**

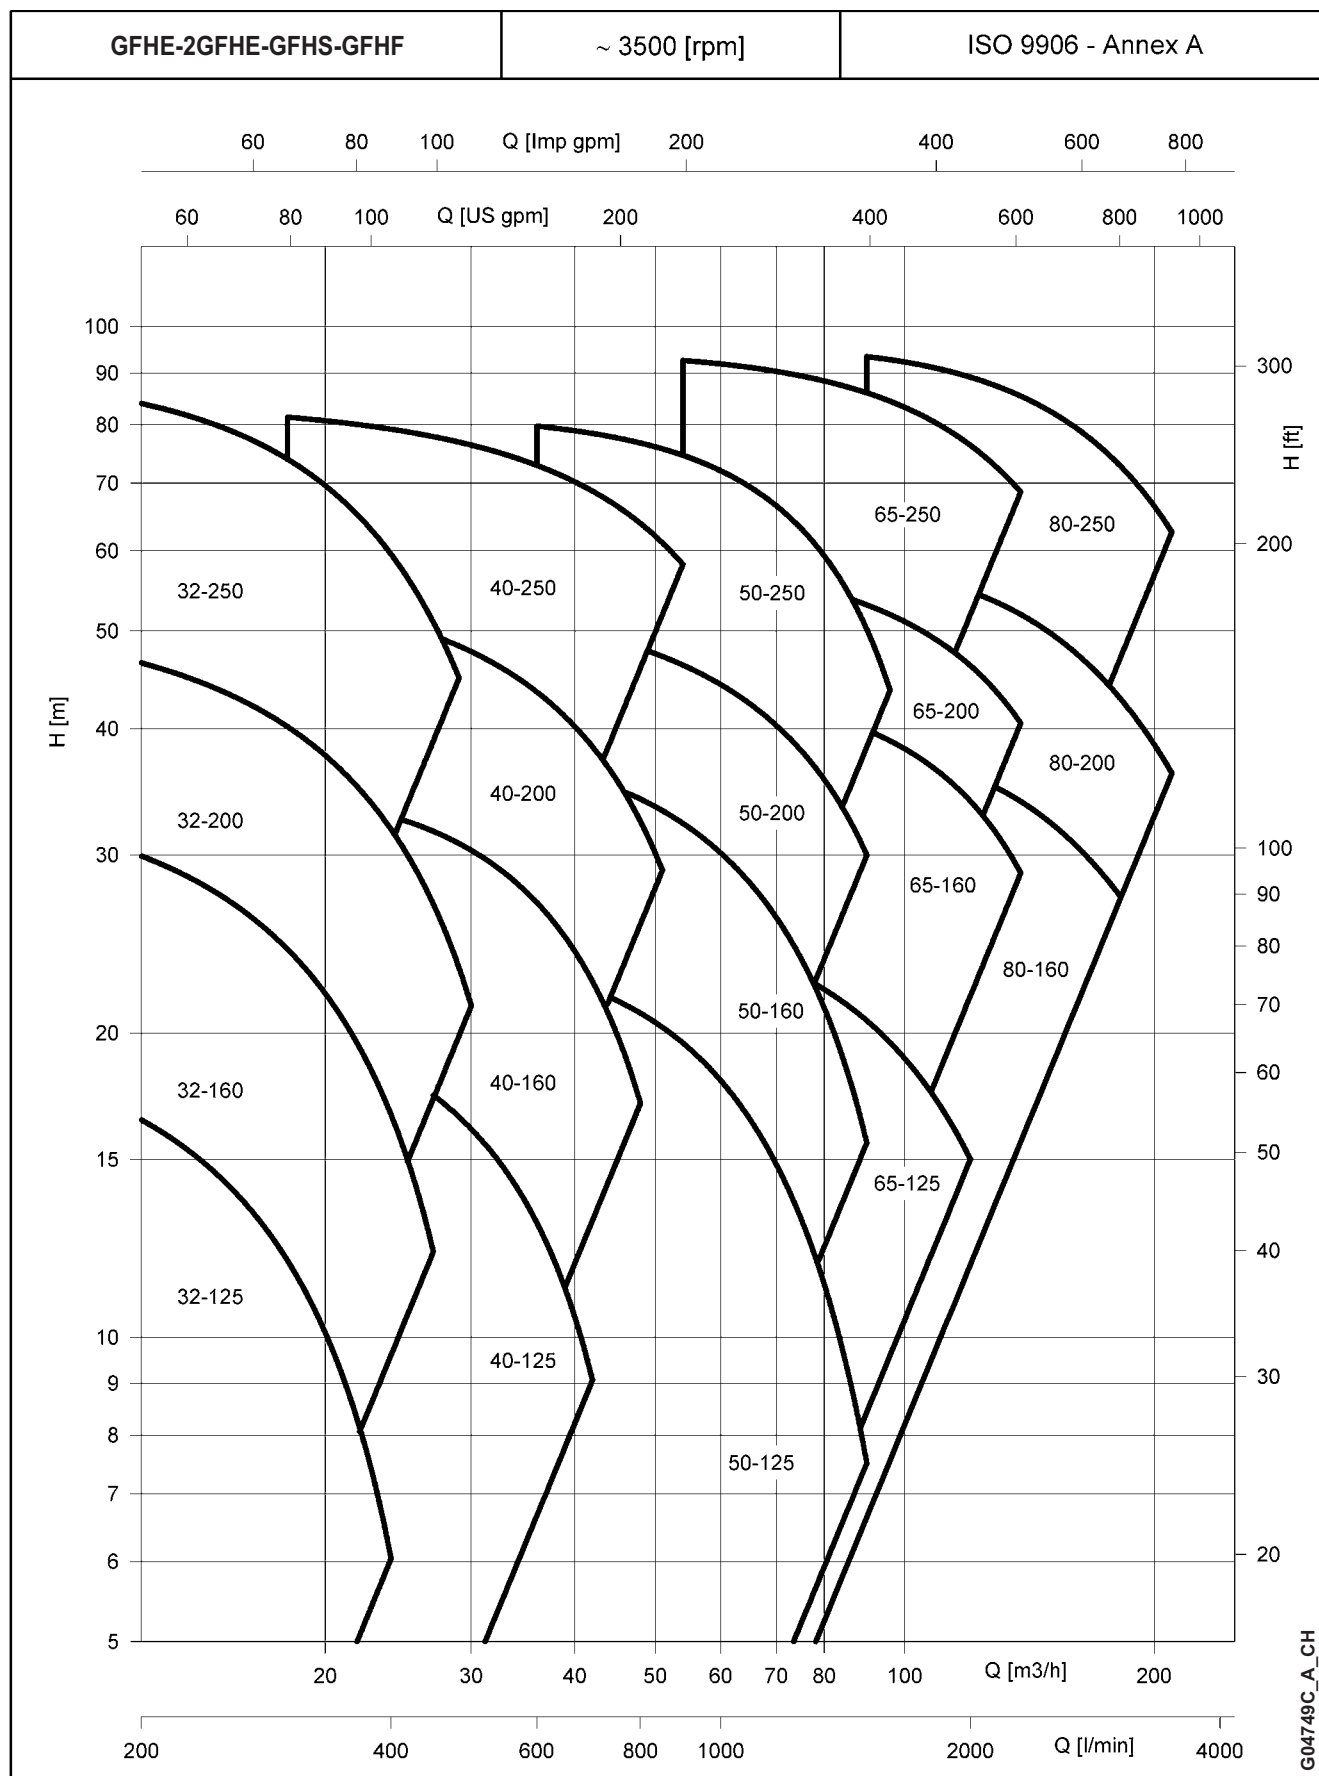

These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$

GFHE-2GFHE-GFHS-GFHF SERIES

HYDRAULIC PERFORMANCE TABLE AT 60 Hz, 2 POLES

PUMP TYPE	RATED POWER		Q = DELIVERY																	
	kW	HP	l/min 0	100	200	300	400	500	600	800	900	1000	1250	1500	1750	2000	2250	2500	2750	3500
			m³/h 0	6	12	18	24	30	36	48	54	60	75	90	105	120	135	150	165	210
			H =TOTAL HEAD METRES COLUMN OF WATER																	
32-125/116*	1,1	1,5	20,5		16,4	11,9	6,0													
32-160/156*	1,5	2	25,1		20,8	15,6	8,0													
32-160/226*	2,2	3	35,0		29,9	24,2	16,6													
32-200/306	3	4	45,6		37,5	30,3	20,8													
32-200/406	4	5,5	52,9		46,5	40,2	31,8	21,3												
32-250/556	5,5	7,5	76,9	74,6	68,9	58,9	44,6													
32-250/756	7,5	10	91,7	89,5	83,9	74,0	59,6													
40-125/156	1,5	2	17,0			15,5	13,8	11,5	8,7											
40-125/226	2,2	3	22,3			20,2	18,5	16,1	13,0											
40-160/306	3	4	30,0			28,4	26,6	23,9	20,3											
40-160/406	4	5,5	36,0			34,4	32,8	30,3	26,9	17,1										
40-200/556	5,5	7,5	44,9			41,9	40,2	37,7	34,0	21,8										
40-200/756	7,5	10	57,0			53,6	51,1	47,7	43,5	32,4										
40-250/**	**	**	60,2			56,9	54,9	52,3	48,9	39,4										
40-250/1106	11	15	69,2			65,2	63,0	60,1	56,5	46,8										
40-250/1506	15	20	84,9			81,4	79,2	76,4	72,9	63,9	58,2									
50-125/306	3	4	20,0						18,0	16,0	14,7	13,1	8,2							
50-125/406	4	5,5	25,0						23,0	20,9	19,6	18,0	13,1	7,5						
50-160/556	5,5	7,5	30,7						29,7	26,9	25,0	22,8	16,1							
50-160/756	7,5	10	38,5						36,9	34,1	32,3	30,1	23,7	15,6						
50-200/**	**	**	45,0						43,9	41,3	39,6	37,6	31,3							
50-200/1106	11	15	53,0						50,9	48,1	46,3	44,2	38,1	30,0						
50-250/1506	15	20	63,8						61,2	57,7	55,2	52,3	42,4							
50-250/1856	18,5	25	72,9						70,0	67,0	64,9	62,2	52,9	39,2						
50-250/2206	22	30	82,3						79,7	76,7	74,6	72,0	63,1	50,2						
65-125/556	5,5	7,5	22,9						21,3	20,8	20,2	18,3	15,9	13,2						
65-125/756	7,5	10	27,0						25,5	25,0	24,5	22,8	20,6	18,0	15,0					
65-160/**	**	**	33,5									30,8	28,9	26,4	23,2	19,3				
65-160/1106	11	15	37,8									35,4	33,6	31,3	28,3	24,7				
65-160/1506	15	20	45,3									43,3	41,9	39,9	37,3	33,9	29,7			
65-200/1856	18,5	25	50,1									51,7	49,8	47,3	44,1	40,0				
65-200/2206	22	30	56,2									57,4	55,5	53,1	50,0	46,2	41,6			
65-250/2206	22	30	64,7									61,6	58,4	54,2	49,1	43,1				
65-250/3006	30	40	79,2									77,7	75,0	71,3	66,5	60,7	53,8			
65-250/3706	37	50	92,8									91,9	89,4	86,0	81,7	76,3	70,0			
80-160/1506	15	20	28,3											31,8	30,8	29,4	27,6	25,6	23,5	
80-160/1856	18,5	25	34,3											38,1	37,2	36,0	34,3	32,3	30,0	
80-200/2206	22	30	44,0											47,4	45,8	43,7	41,1	38,1	34,9	
80-200/3006	30	40	52,9											57,7	56,5	54,7	52,4	49,7	46,7	36,2
80-250/3706	37	50	69,3											71,3	68,9	65,8	62,0	57,7	52,8	
80-250/4506	45	61	78,3											81,0	78,8	75,8	72,3	68,1	63,4	
80-250/5506	55	75	89,1											93,4	91,6	89,1	86,1	82,4	78,2	62,6


* Available single-phase motor version

gfhe-gfhs-gfhf-2p60_a_th

** /926 = 9.2kW - 12.5HP in the FHE version ** /1106 = 11kW - 15HP in the GFHS-GFHF version

Performances according to ISO 9906 - Annex A

GFHS-GFHF SERIES
HYDRAULIC PERFORMANCE RANGE AT 60 Hz, 2 POLES

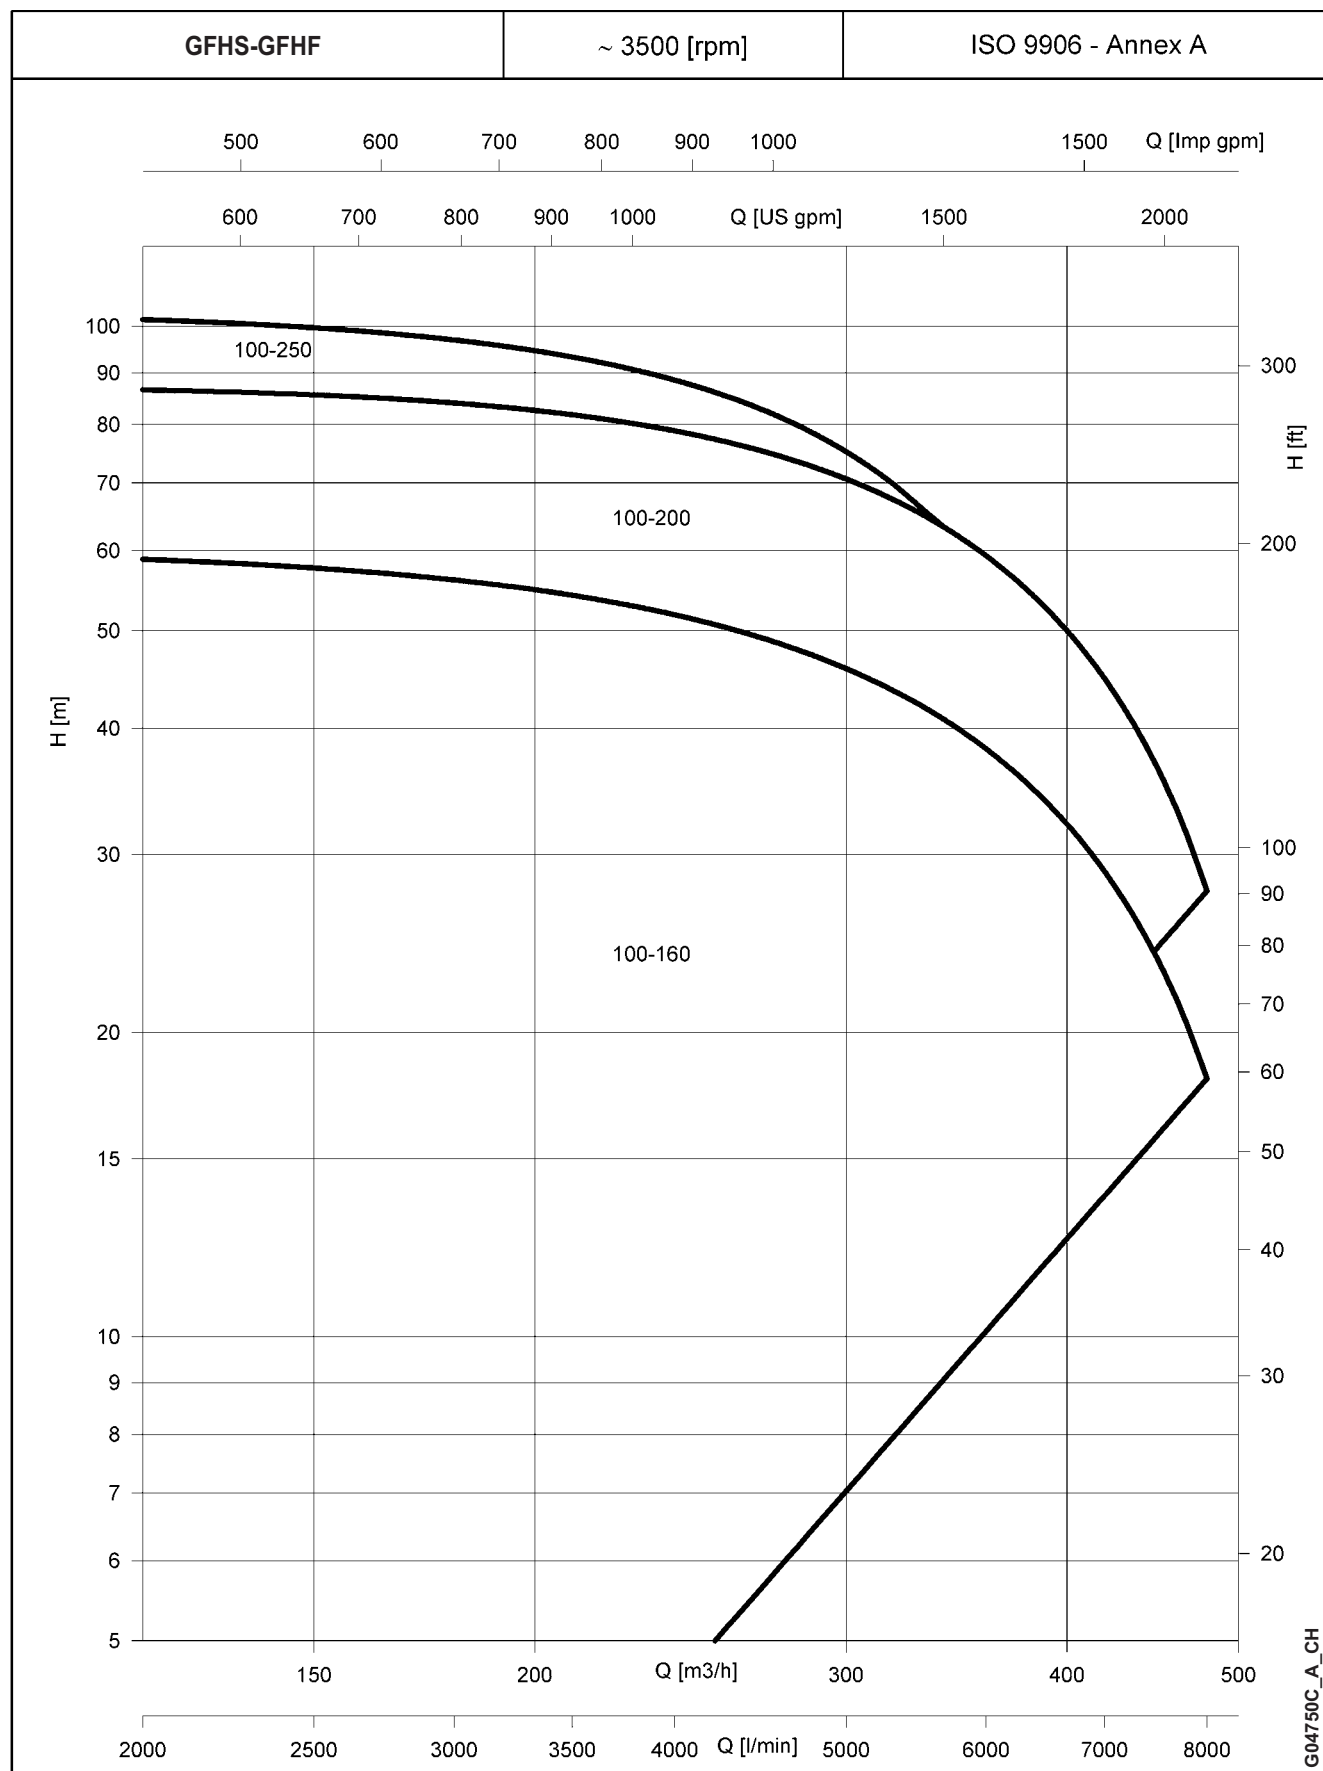

These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHS-GFHF SERIES


HYDRAULIC PERFORMANCE TABLE AT 60 Hz, 2 POLES

PUMP TYPE	RATED POWER		Q = DELIVERY																	
	kW	HP	l/min 0	1000	1500	2000	2500	3000	3500	4000	4500	5000	5450	5667	6000	6500	6667	7000	7500	8000
			m³/h 0	60	90	120	150	180	210	240	270	300	327	340	360	390	400	420	450	480
			H =TOTAL HEAD METRES COLUMN OF WATER																	
100-160/3006	30	40	36,3			35,5	34,4	32,9	30,9	28,5	25,8	22,7	19,7	18,2	15,9	12,4	11,3			
100-160/3706	37	50	43,4			42,8	41,9	40,6	38,7	36,4	33,6	30,3	27,1	25,5	22,8	18,8	17,5	14,8		
100-160/4506	45	61	52,3			51,3	50,2	48,6	46,7	44,3	41,5	38,3	35,1	33,4	30,6	26,2	24,6	21,3	16,1	
100-160/5506	55	75	60,0			58,8	57,7	56,1	54,2	51,8	49,1	45,9	42,6	40,9	38,2	33,7	32,2	28,9	23,6	18,0
100-200/3006	30	40	49,7			46,4	43,2	39,3	34,9	29,9	24,5	18,7	13,4	10,7	6,6					
100-200/3706	37	50	54,7			52,2	49,7	46,5	42,6	38,1	32,9	27,0	21,0	18,0	12,9					
100-200/4506	45	61	61,2			59,5	57,4	54,6	51,2	47,2	42,5	37,0	31,3	28,3	23,2	14,5				
100-200/5506	55	75	70,9			69,9	68,2	65,9	63,0	59,3	55,0	49,9	44,6	41,8	37,3	29,7	26,9	21,2		
100-200/7506	75	102	87,0			86,6	85,6	84,0	81,8	78,8	75,1	70,7	65,9	63,4	59,3	52,4	50,0	44,8	36,5	27,6
100-250/5506	55	75	77,4		76,6	75,1	72,6	69,0	64,2	58,0	50,3	41,0	31,0							
100-250/7506	75	102	91,9		91,5	90,2	88,1	85,1	81,0	75,8	69,3	61,3	52,8	48,3	40,7					
100-250/9006	90	122	103,0		103	102	99,7	97,0	93,3	88,5	82,5	75,2	67,4	63,1	56,1					

Performances according to ISO 9906 - Annex A

lm-fhs-fhf-2p60_a_th

GFHE4-2GFHE4-GFHS4-GFHF4 SERIES
HYDRAULIC PERFORMANCE RANGE AT 60 Hz, 4 POLES

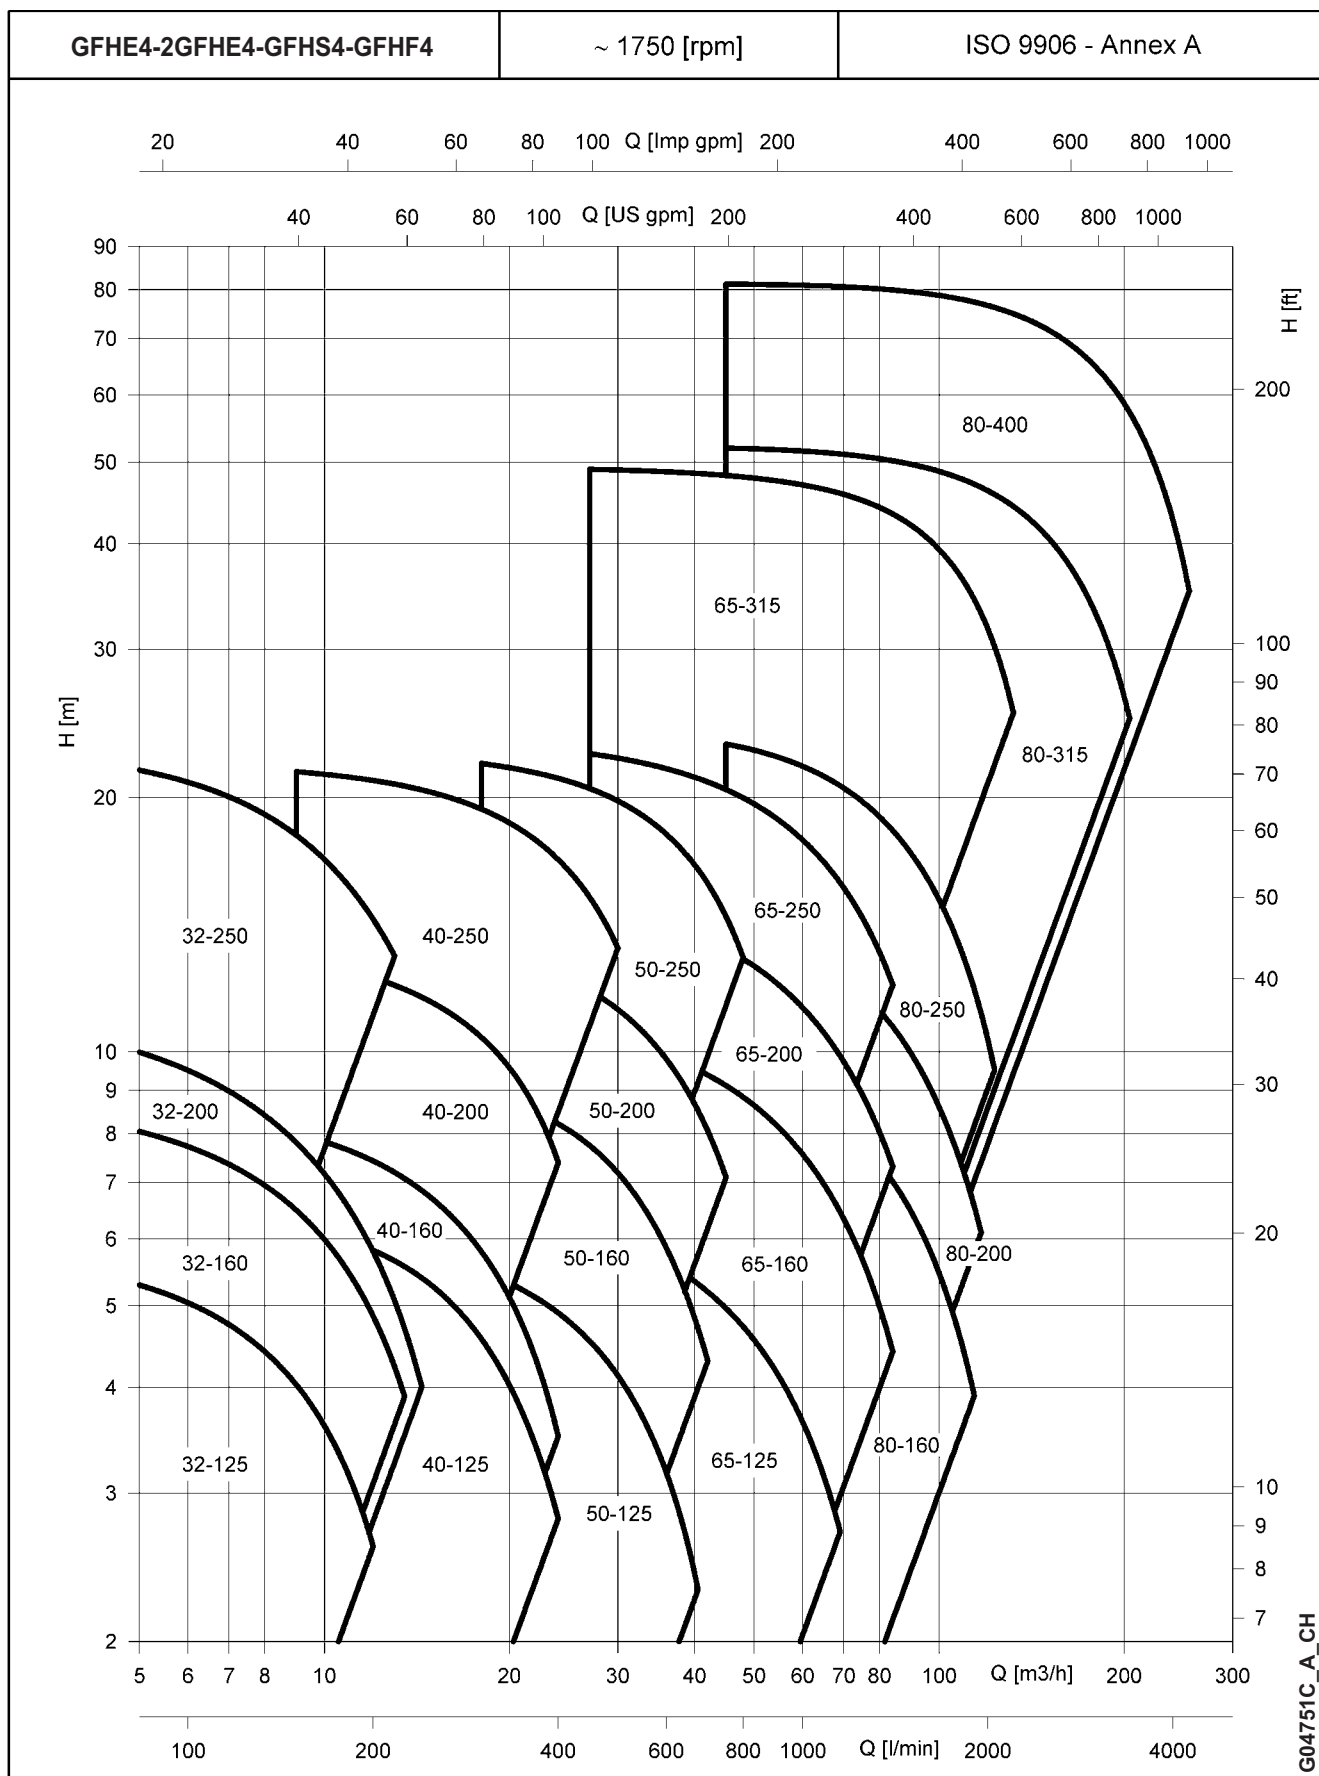

These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE4-2GFHE4-GFHS4-GFHF4 SERIES

HYDRAULIC PERFORMANCE TABLE AT 60 Hz, 4 POLES

PUMP TYPE	RATED POWER		Q = DELIVERY																	
	kW	HP	l/min 0	75	100	150	200	300	350	400	450	500	650	750	1150	1300	1650	2000	3000	4000
			m³/h 0	4,5	6	9	12	18	21	24	27	30	39	45	69	78	99	120	180	240
			H = TOTAL HEAD METRES COLUMN OF WATER																	
32-125/026*	0,25	0,34	6,0	5,4	5,0	4,0	2,6													
32-160/026**	0,25	0,34	7,6	6,8	6,3	5,1	3,4													
32-160/036**	0,37	0,5	9,1	8,2	7,7	6,5	4,9													
32-200/036**	0,37	0,5	10,4	9,2	8,5	6,8	4,7													
32-200/056**	0,55	0,75	11,5	10,2	9,5	7,8	5,8													
32-250/076*	0,75	1	19,3	17,9	16,9	14,0	10,3													
32-250/116*	1,1	1,5	23,3	21,9	20,9	18,1	14,4													
40-125/026*	0,25	0,34	5,1			4,7	4,3	2,9	2,0											
40-125/036**	0,37	0,5	6,6			6,2	5,8	4,6	3,7	2,8										
40-160/036**	0,37	0,5	7,2			6,6	6,0	4,2	3,1											
40-160/056**	0,55	0,75	8,5			8,0	7,4	5,8	4,7	3,5										
40-200/076	0,75	1,0	11,1			10,2	9,6	7,7	6,4											
40-200/116	1,1	1,5	13,9			12,9	12,2	10,4	9,1	7,4										
40-250/116	1,1	1,5	14,4			13,5	12,9	11,1	9,8	8,2	6,2									
40-250/156	1,5	2	16,5			15,5	14,9	13,2	12,0	10,5	8,6									
40-250/226	2,2	3	22,3			21,5	21,0	19,4	18,3	16,9	15,2	13,3								
50-125/036**	0,37	0,5	5,1					4,3	4,0	3,6	3,2	2,8								
50-125/056**	0,55	0,75	6,2					5,5	5,2	4,9	4,5	4,1	2,6							
50-160/076	0,75	1	7,6					7,2	6,9	6,5	6,0	5,4	3,3							
50-160/116	1,1	1,5	9,3					8,9	8,6	8,2	7,7	7,2	5,1							
50-200/116	1,1	1,5	11,2					10,7	10,4	9,9	9,4	8,8	6,4							
50-200/156	1,5	2	13,7					13,1	12,8	12,3	11,8	11,2	9,0	7,1						
50-250/226A	2,2	3	15,8					14,7	14,3	13,8	13,2	12,4	9,2							
50-250/226	2,2	3	19,2					17,9	17,5	17,0	16,3	15,6	12,6	9,8						
50-250/306	3	4	23,1					22,0	21,6	21,1	20,5	19,8	17,0	14,5						
65-125/076	0,75	1	5,9							5,4	5,2	5,1	4,5	4,1						
65-125/116	1,1	1,5	6,8							6,3	6,2	6,0	5,4	5,0	2,7					
65-160/116	1,1	1,5	8,3									7,4	6,7	6,1	3,4					
65-160/156	1,5	2	9,6									8,6	7,9	7,4	4,6	3,4				
65-160/226	2,2	3	11,2									10,3	9,6	9,1	6,5	5,3	2,2			
65-200/226	2,2	3	12,7									12,4	11,7	11,0	7,5	6,0				
65-200/306	3	4	14,9									14,6	13,8	13,2	9,9	8,4	4,6			
65-250/306	3	4	15,8								15,2	14,9	13,8	12,9	7,9					
65-250/406	4	5,5	19,8								19,1	18,8	17,7	16,8	12,0	9,8				
65-250/556	5,5	7,5	23,5								22,6	22,3	21,3	20,5	15,9	13,6	7,4			
65-315/556	5,5	7,5	23,8								23,0	22,9	22,1	21,2	15,1	11,7	2,1			
65-315/756	7,5	10	28,4								27,8	27,7	27,0	26,4	21,8	19,1	10,4			
65-315/1106	11	15	36,3								35,9	35,8	35,3	34,8	31,4	29,3	22,0	10,3		
65-315/1506	15	20	43,9								43,6	43,5	43,2	42,9	40,4	38,8	33,0	23,4		
65-315/1856	18,5	25	49,3								49,0	49,0	48,6	48,2	45,9	44,5	39,7	31,7		
80-160/156	1,5	2	6,5											7,0	5,6	4,9	3,0			
80-160/226	2,2	3	9,0											9,5	8,2	7,5	5,6			
80-200/306	3	4	10,7											11,4	9,6	8,7	6,0			
80-200/406	4	5,5	13,3											14,1	12,4	11,4	8,7			
80-250/406	4	5,5	15,5											15,5	12,6	11,0	6,5			
80-250/556	5,5	7,5	19,9											19,8	17,2	15,7	11,6			
80-250/756	7,5	10	23,0											23,2	20,7	19,3	15,3	10,3		
80-315/1106	11	15	30,8											30,0	28,4	27,6	24,8	20,7		
80-315/1506	15	20	38,1											37,5	36,4	35,8	33,5	30,0		
80-315/1856	18,5	25	42,8											42,4	41,5	41,0	39,1	36,0		
80-315/2206	22	30	47,0											46,7	45,9	45,4	43,6	40,9	26,2	
80-315/3006	30	41	52,1											52,0	51,1	50,6	48,9	46,2	33,0	
80-400/2206	22	30	45,7											45,3	44,4	43,7	41,3	37,4	17,2	
80-400/3006	30	41	54,5											54,5	53,8	53,3	51,5	48,5	31,3	
80-400/3706	37	50	63,2											63,2	62,7	62,3	60,7	58,2	43,3	
80-400/4506	45	61	72,0											72,1	71,5	71,1	69,6	67,3	54,3	
80-400/5506	55	75	80,8											81,3	80,7	80,3	78,9	76,6	64,7	

Performances according to ISO 9906 - Annex A


* GFHE4 VERSION ONLY

** GFHE4, GFHF4 VERSION ONLY

gfhe4-gfhs4-gfhf4-4p60_a_th

GFHS4-GFHF4 SERIES

HYDRAULIC PERFORMANCE RANGE AT 60 Hz, 4 POLES

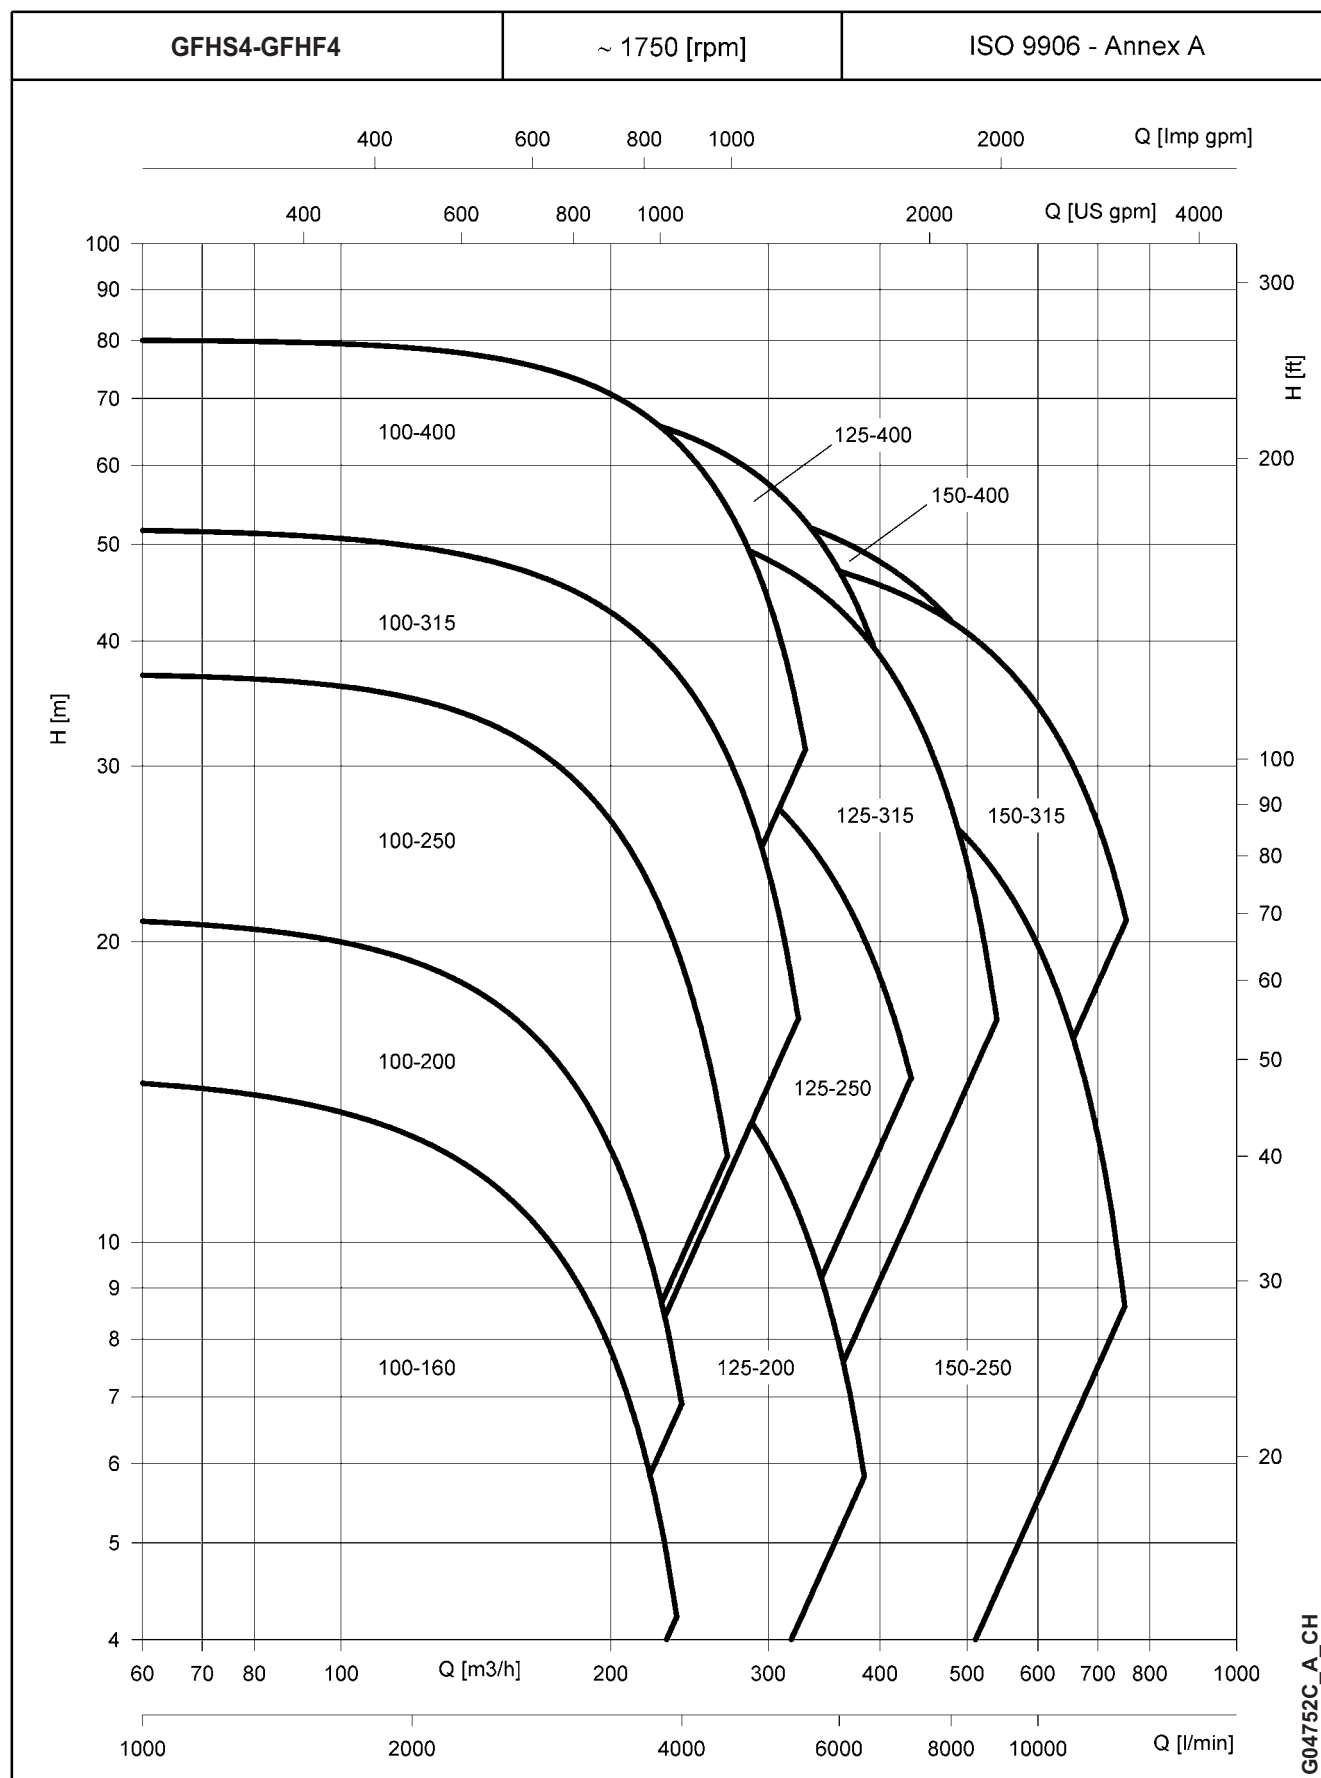

These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHS4-GFHF4 SERIES


HYDRAULIC PERFORMANCE TABLE AT 60 Hz, 4 POLES

PUMP TYPE	RATED POWER		Q = DELIVERY																	
	kW	HP	l/min 0	1000	1250	1500	1667	3000	4000	5000	5500	6000	6500	7000	8000	9000	10000	11000	12000	12500
			m³/h 0	60	75	90	100	180	240	300	330	360	390	420	480	540	600	660	720	750
			H = TOTAL HEAD METRES COLUMN OF WATER																	
100-160/406	4	5,5	9,4	9,2	9,0	8,7	8,4	4,5												
100-160/556	5,5	7,5	12,9	12,6	12,3	12,0	11,7	7,6												
100-160/756	7,5	10	14,7	14,4	14,2	13,8	13,5	9,4												
100-200/406	4	5,5	12,5	11,5	10,9	10,1	9,4													
100-200/556	5,5	7,5	14,8	14,2	13,8	13,2	12,6	5,4												
100-200/756	7,5	10	17,7	17,4	17,0	16,6	16,2	9,8												
100-200/1106	11	15	21,4	21,0	20,7	20,3	20,0	14,6	6,9											
100-250/1106	11	15	25,4	25,3	24,9	24,2	23,7	14,5												
100-250/1506	15	20	31,2	31,2	30,8	30,4	29,9	22,2	10,6											
100-250/1856	18,5	25	34,7	34,7	34,4	34,0	33,6	26,7	16,0											
100-250/2206	22	30	37,0	37,0	36,8	36,4	36,0	29,3	19,0											
100-315/2206	22	30	36,4	36,4	36,0	35,5	35,0	27,6	16,3											
100-315/3006	30	41	46,1	46,3	45,9	45,4	45,0	38,3	28,6	14,2										
100-315/3706	37	50	51,5	51,6	51,4	51,0	50,7	45,1	36,7	23,5										
100-400/3006	30	41	49,2	48,9	48,7	48,3	47,8	35,3	15,6											
100-400/3706	37	50	56,9	56,7	56,7	56,4	56,0	45,8	28,0											
100-400/4506	45	61	63,3	63,1	63,1	62,9	62,6	53,8	37,7											
100-400/5506	55	75	72,6	72,5	72,4	72,2	71,9	64,8	51,4	29,4										
100-400/7506	75	102	80,2	80,0	79,9	79,7	79,4	73,6	62,7	44,0	31,1									
125-200/756	7,5	10	13,8			12,5	12,3	10,0	7,7	4,8										
125-200/1106	11	15	17,5			16,4	16,2	13,9	11,3	7,8	5,7									
125-200/1506	15	20	22,0			21,2	21,0	18,6	15,9	12,4	10,3	7,9								
125-250/1106	11	15	19,5			19,4	19,3	16,3	12,0											
125-250/1506	15	20	24,7			24,6	24,5	22,0	18,2	12,9	9,7									
125-250/1856	18,5	25	28,0			28,0	27,9	25,6	22,0	16,9	13,8									
125-250/2206	22	30	30,0			30,0	29,9	27,8	24,4	19,3	16,4	13,2								
125-250/3006	30	41	35,4			35,6	35,6	34,2	31,7	27,8	25,4	22,6	19,5	16,1						
125-315/3006	30	41	35,7				35,3	33,1	29,7	24,5	21,2	17,3	12,8							
125-315/3706	37	50	41,5				41,3	39,5	36,6	31,9	28,8	25,3	21,3	16,8						
125-315/4506	45	61	46,4				46,1	44,8	42,3	38,3	35,6	32,4	28,7	24,5	14,5					
125-315/5506	55	75	53,2				53,1	52,0	49,8	46,2	43,8	40,9	37,5	33,6	24,2					
125-315/7506	75	102	55,0				54,9	53,8	51,7	48,2	45,9	43,1	39,8	36,1	27,3	16,7				
125-400/4506	45	61	53,8				53,2	49,5	43,2	32,9	25,9	17,5								
125-400/5506	55	75	59,4				59,1	55,6	50,0	41,1	35,2	28,2								
125-400/7506	75	102	71,4				71,3	68,8	64,5	57,5	52,7	47,0	40,3	32,5						
150-250/2206	22	30	21,7					20,8	19,3	17,3	16,1	14,9	13,5	12,2	9,2	6,1				
150-250/3006	30	41	29,0					28,1	26,9	25,4	24,4	23,4	22,3	21,0	18,2	15,0	11,2	6,9		
150-250/3706	37	50	32,6					31,8	30,7	29,2	28,3	27,4	26,3	25,2	22,5	19,5	15,9	11,6		
150-250/4506	45	61	36,0					35,2	34,2	32,8	32,0	31,1	30,1	28,9	26,4	23,3	19,8	15,8	11,2	8,6
150-315/3706	37	50	35,4					34,3	33,0	31,1	29,9	28,7	27,2	25,6	22,0					
150-315/4506	45	61	39,5					38,8	37,7	36,0	34,9	33,7	32,4	30,9	27,4	23,2	18,3			
150-315/5506	55	75	44,0					43,4	42,5	41,1	40,1	39,1	37,8	36,4	33,2	29,3	24,9	20,0		
150-315/7506	75	102	51,6					51,0	50,1	48,8	47,9	47,0	45,9	44,7	41,9	38,5	34,4	29,7	24,3	21,3
150-400/5506	55	75	48,8					47,1	45,1	42,4	40,7	38,9	36,8	34,5	29,3	23,2	16,0			
150-400/7506	75	102	58,1					57,5	55,9	53,6	52,2	50,5	48,7	46,6	41,9	36,3	29,9	22,5		

Performances according to ISO 9906 - Annex A


lm-fhs4-fhf4-4p60_a_th

GFHE-GFHS-GFHF SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 2 POLES**

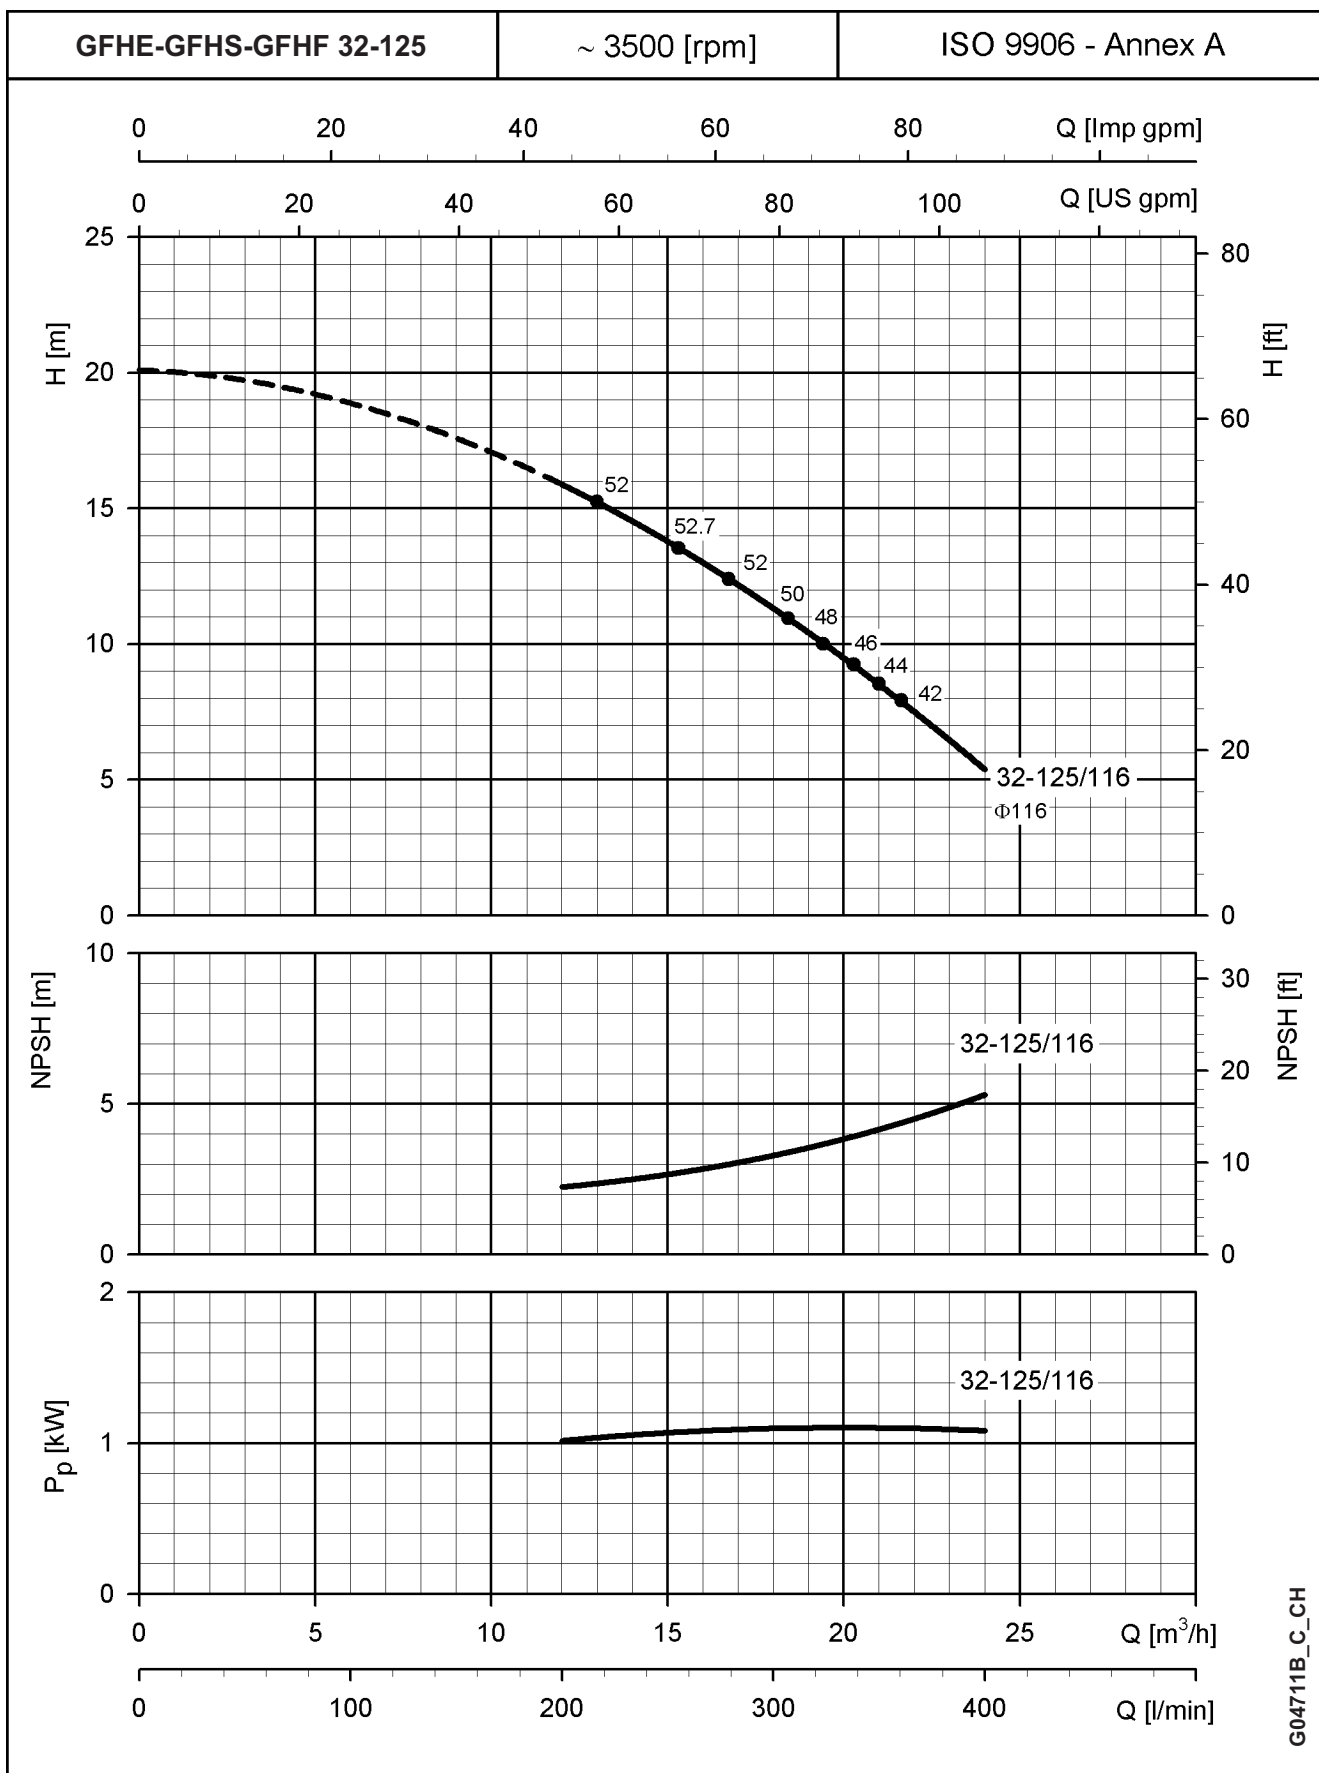

The NPSH values are laboratory values: for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.


GFHE-GFHS-GFHF SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 2 POLES**

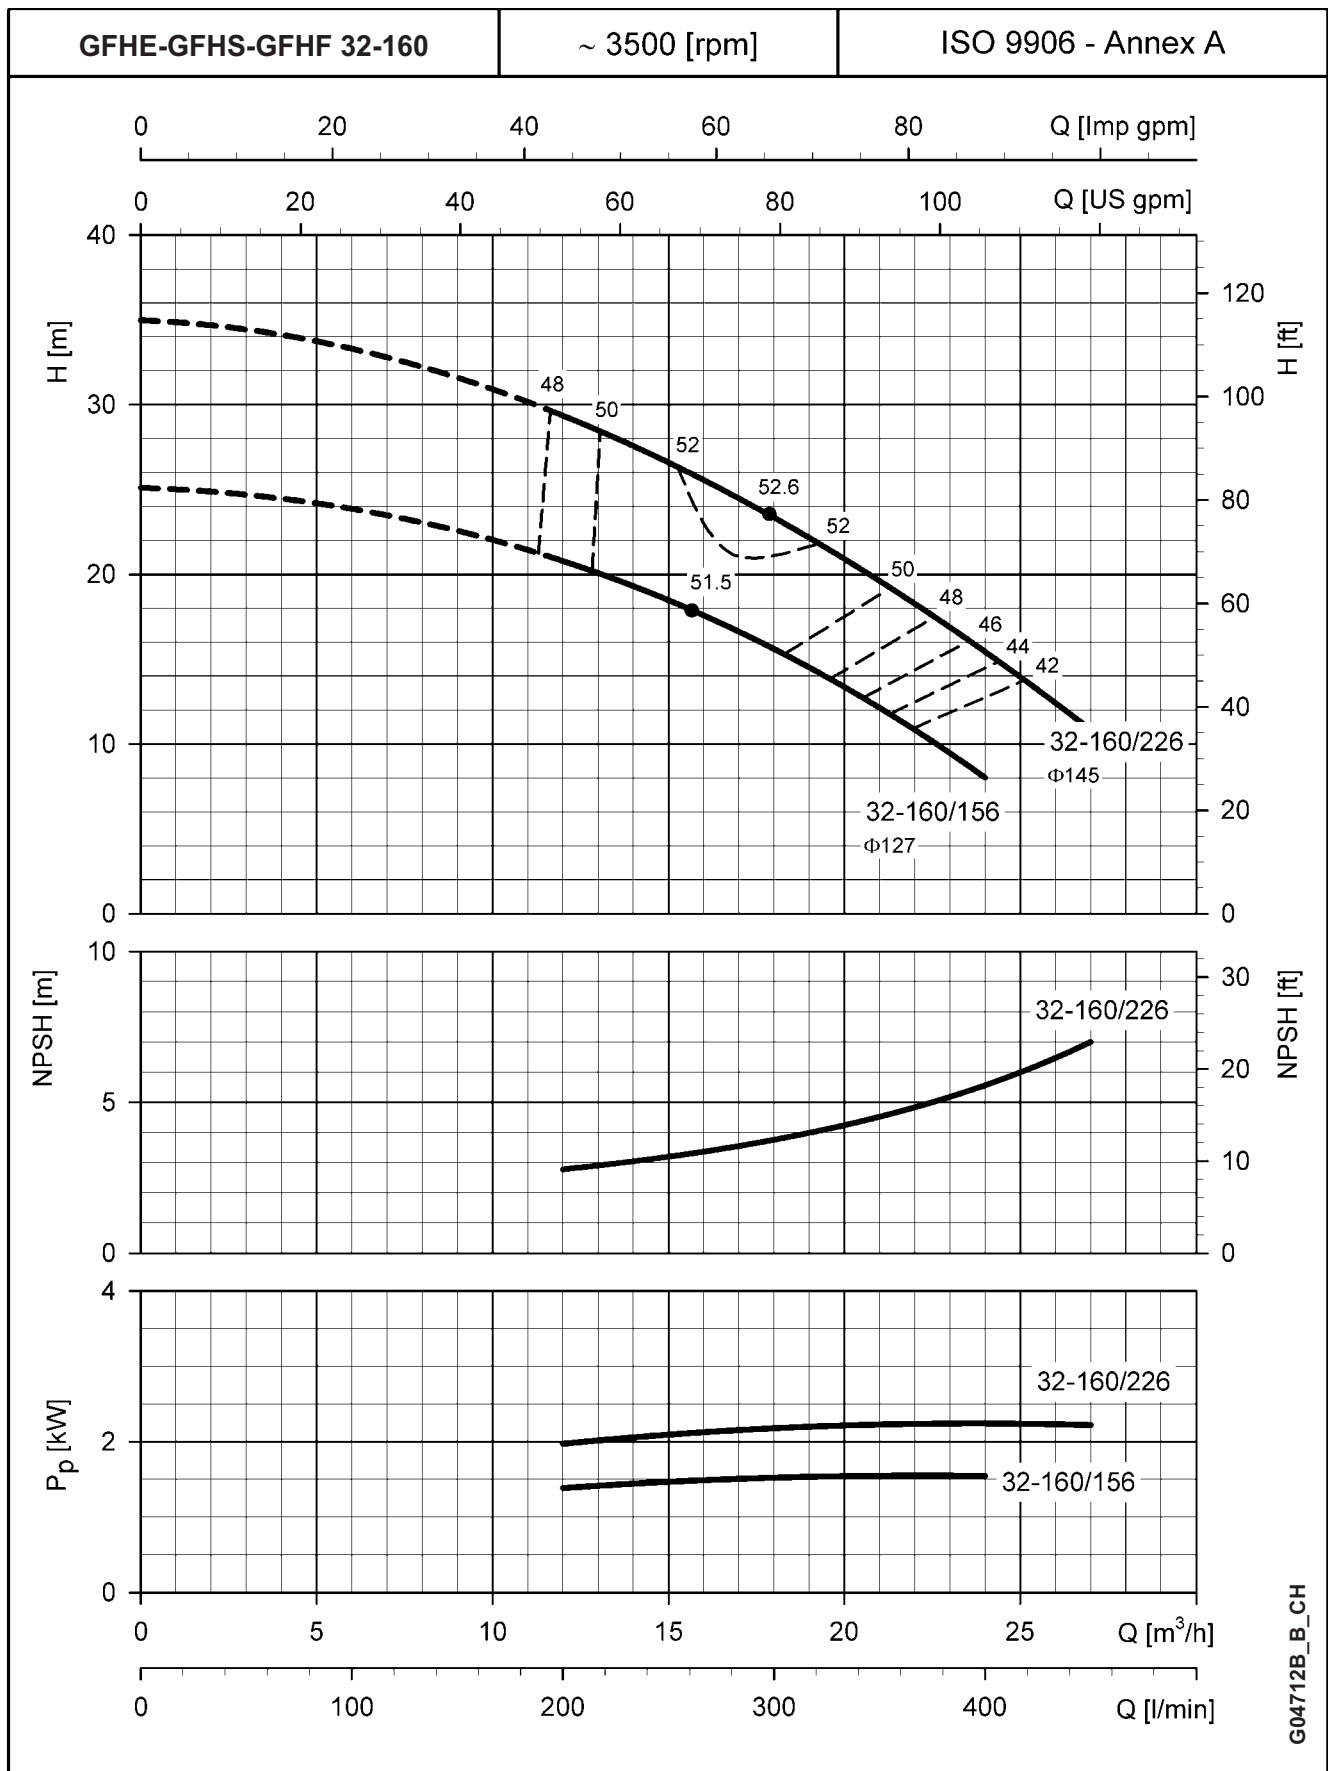

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.


GFHE-GFHS-GFHF SERIES

OPERATING CHARACTERISTICS AT 60 Hz, 2 POLES

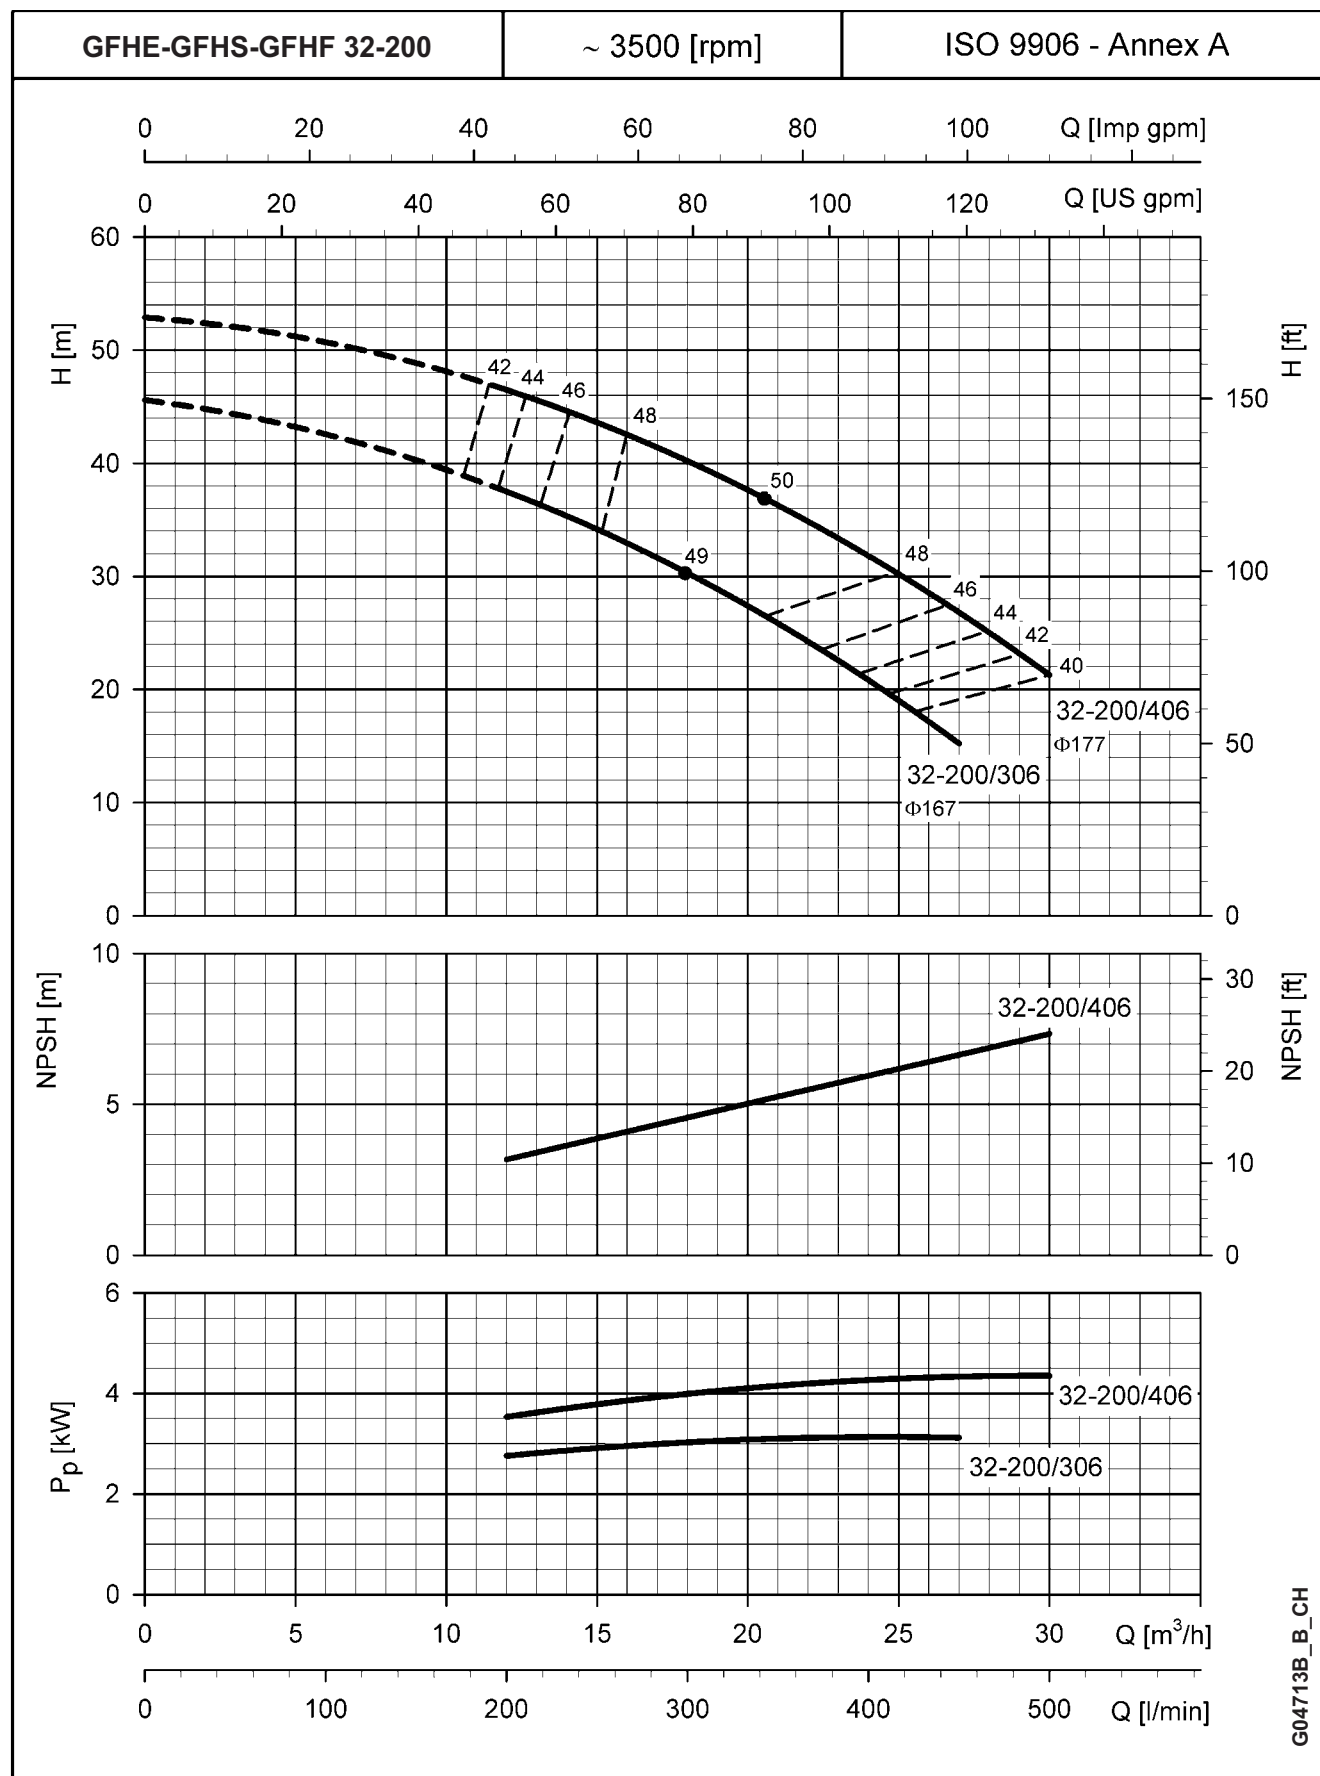


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

2GFHE SERIES OPERATING CHARACTERISTICS AT 60 Hz, 2 POLES

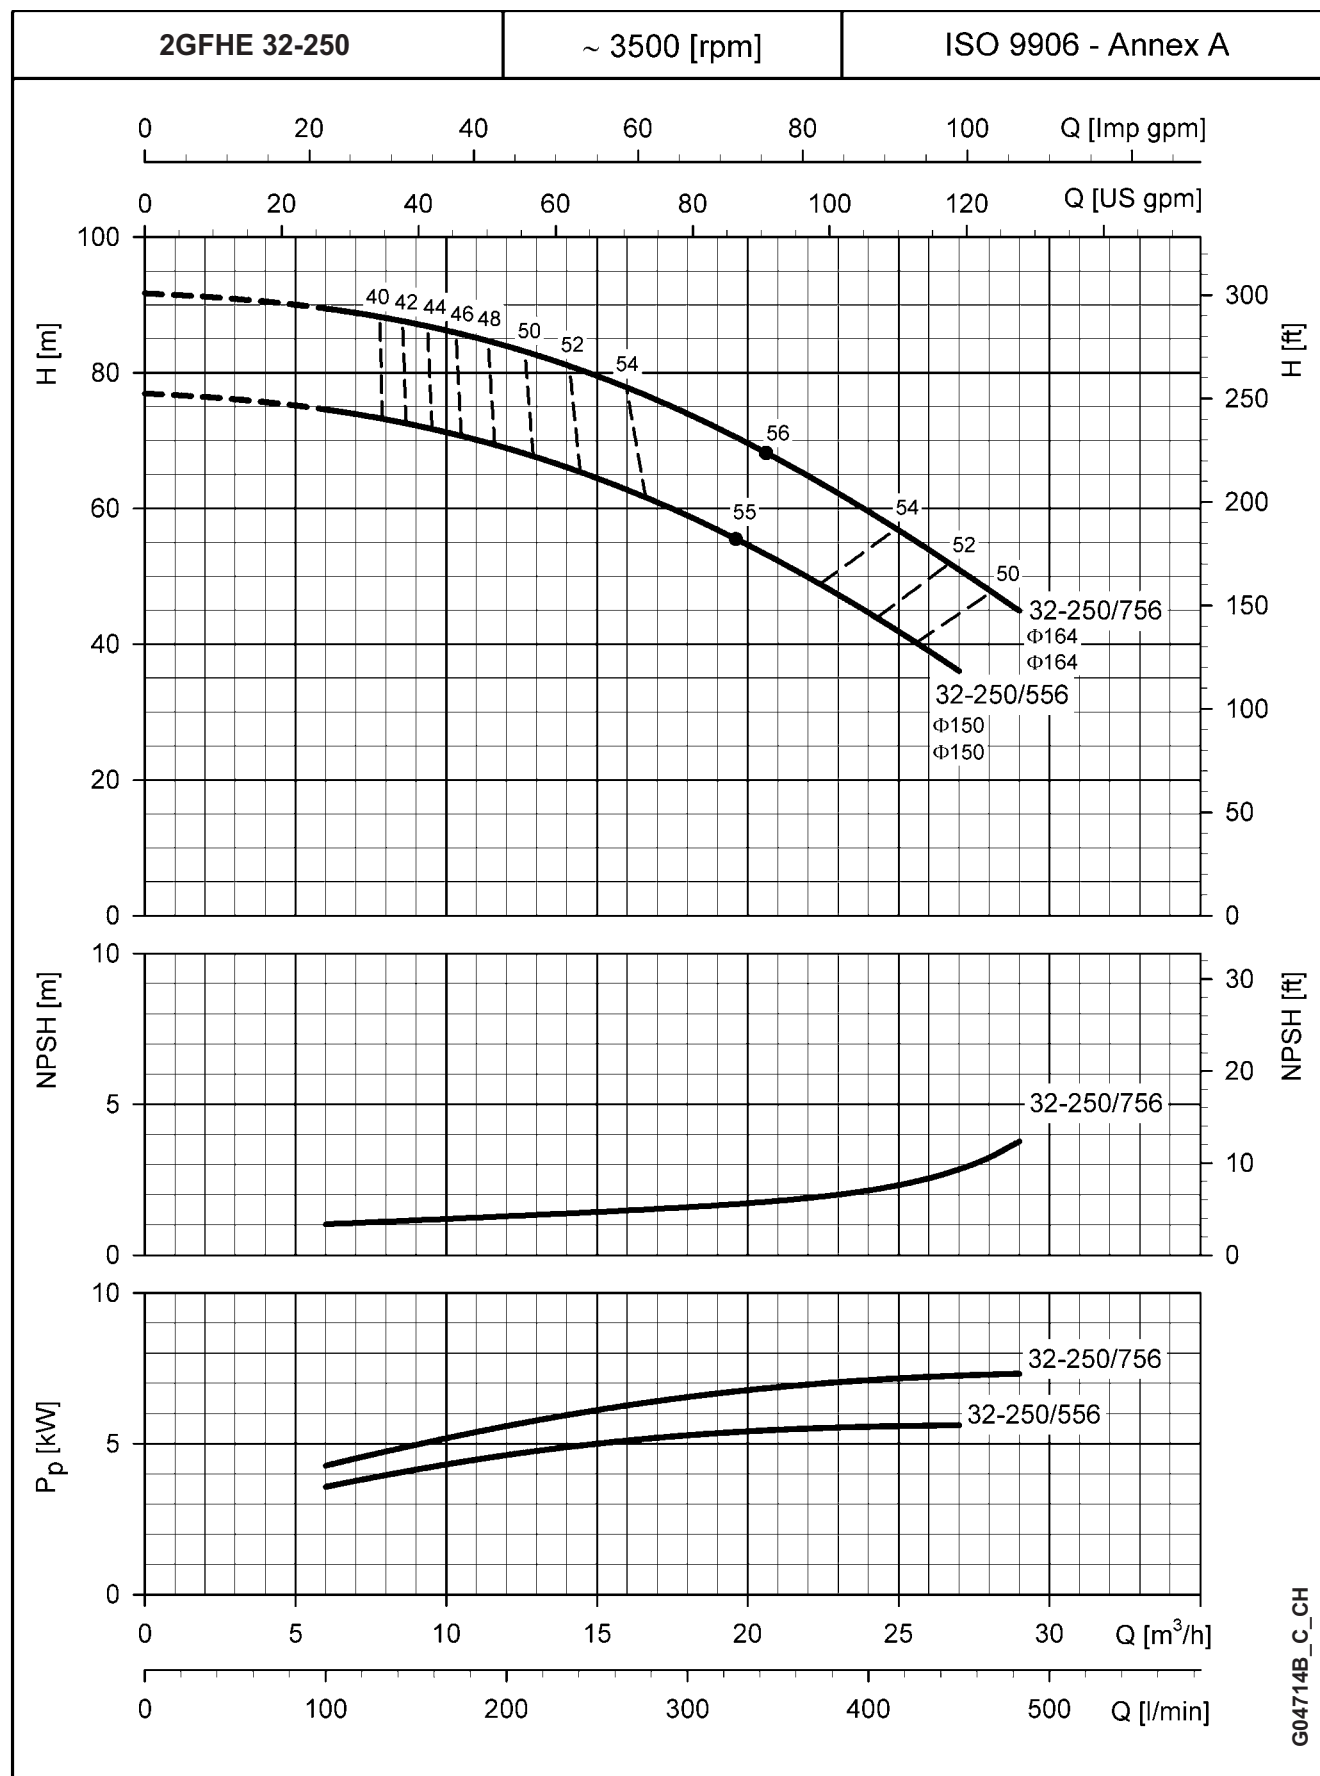


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE-GFHS-GFHF SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 2 POLES**

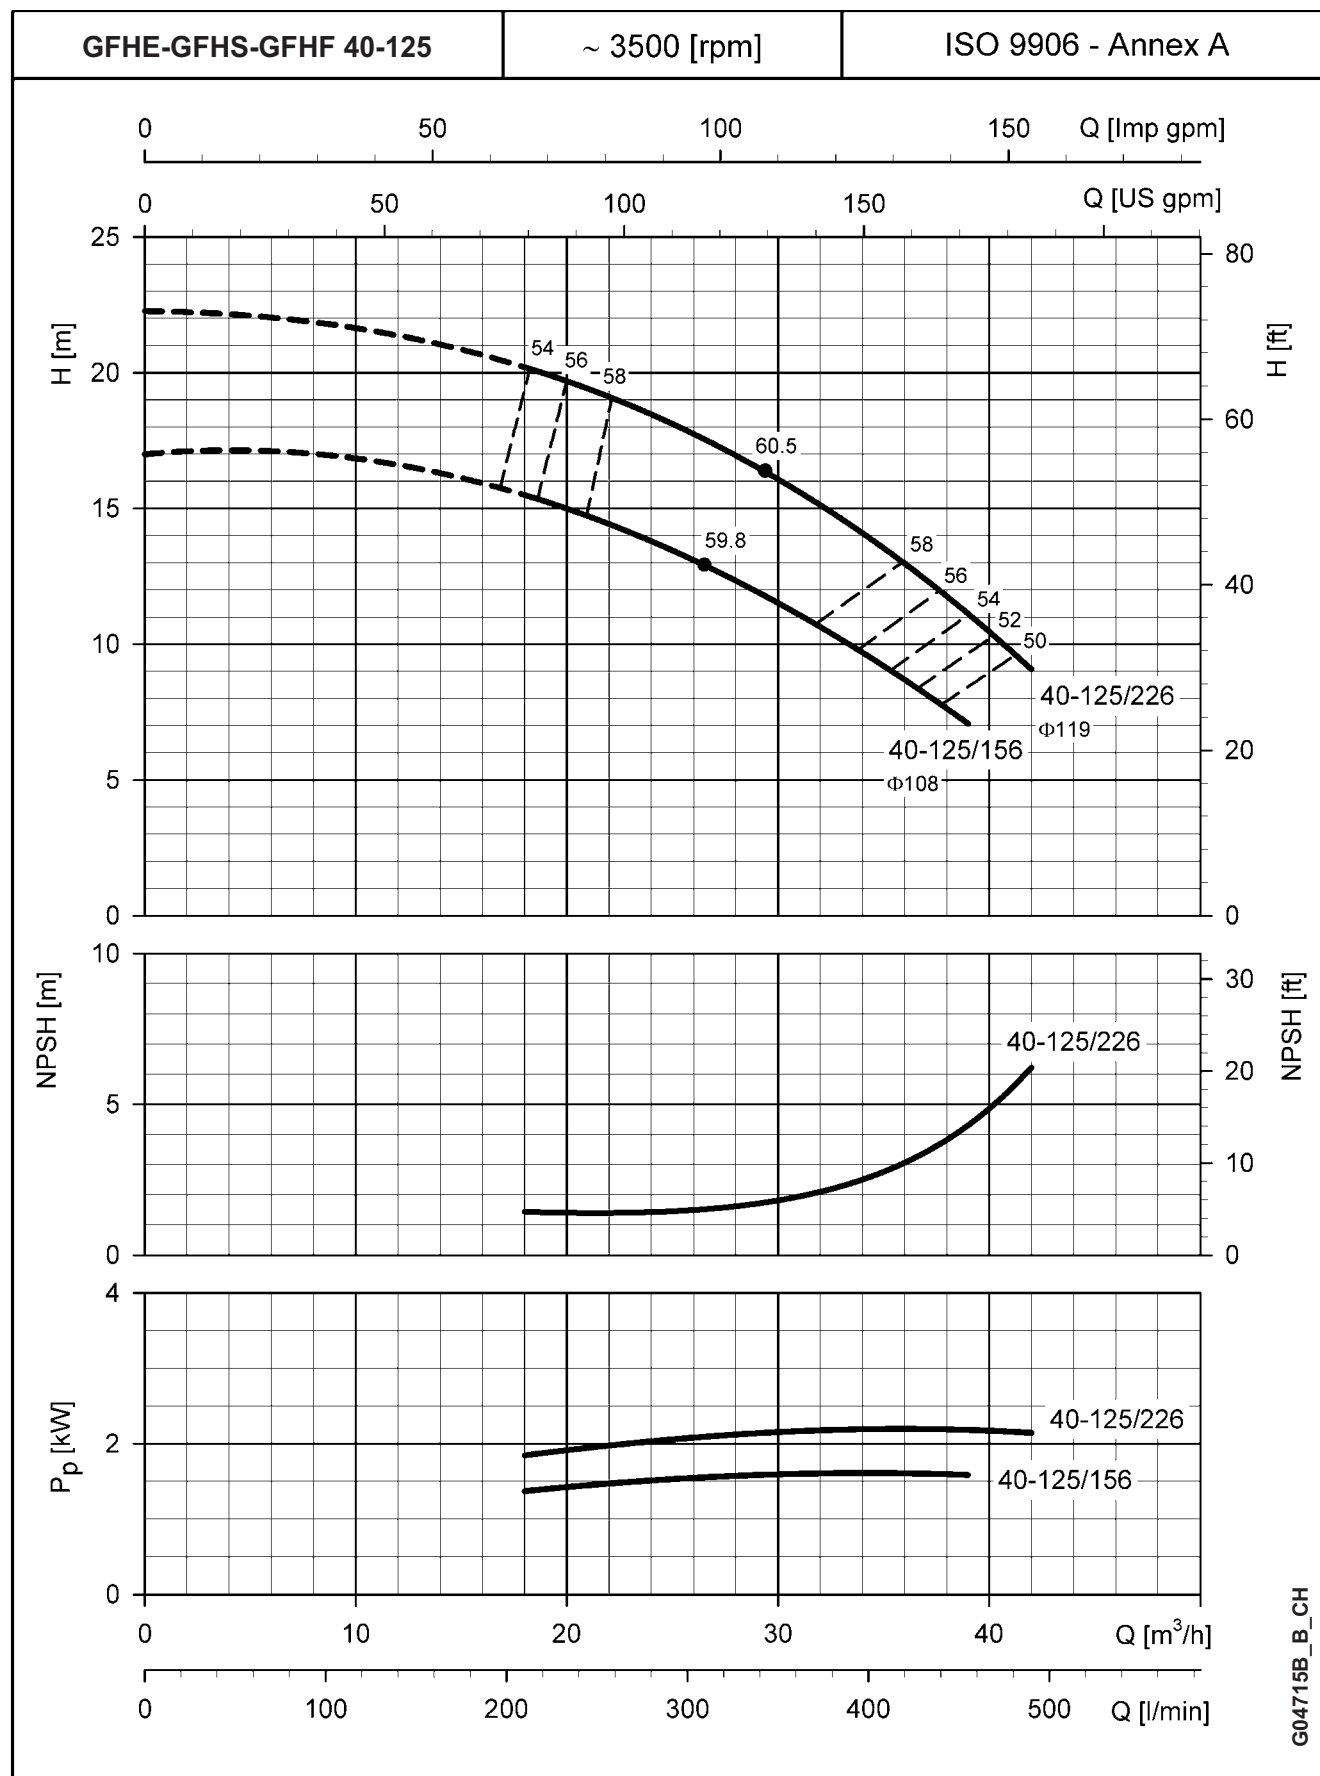


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE-GFHS-GFHF SERIES
OPERATING CHARACTERISTICS AT 60 Hz, 2 POLES

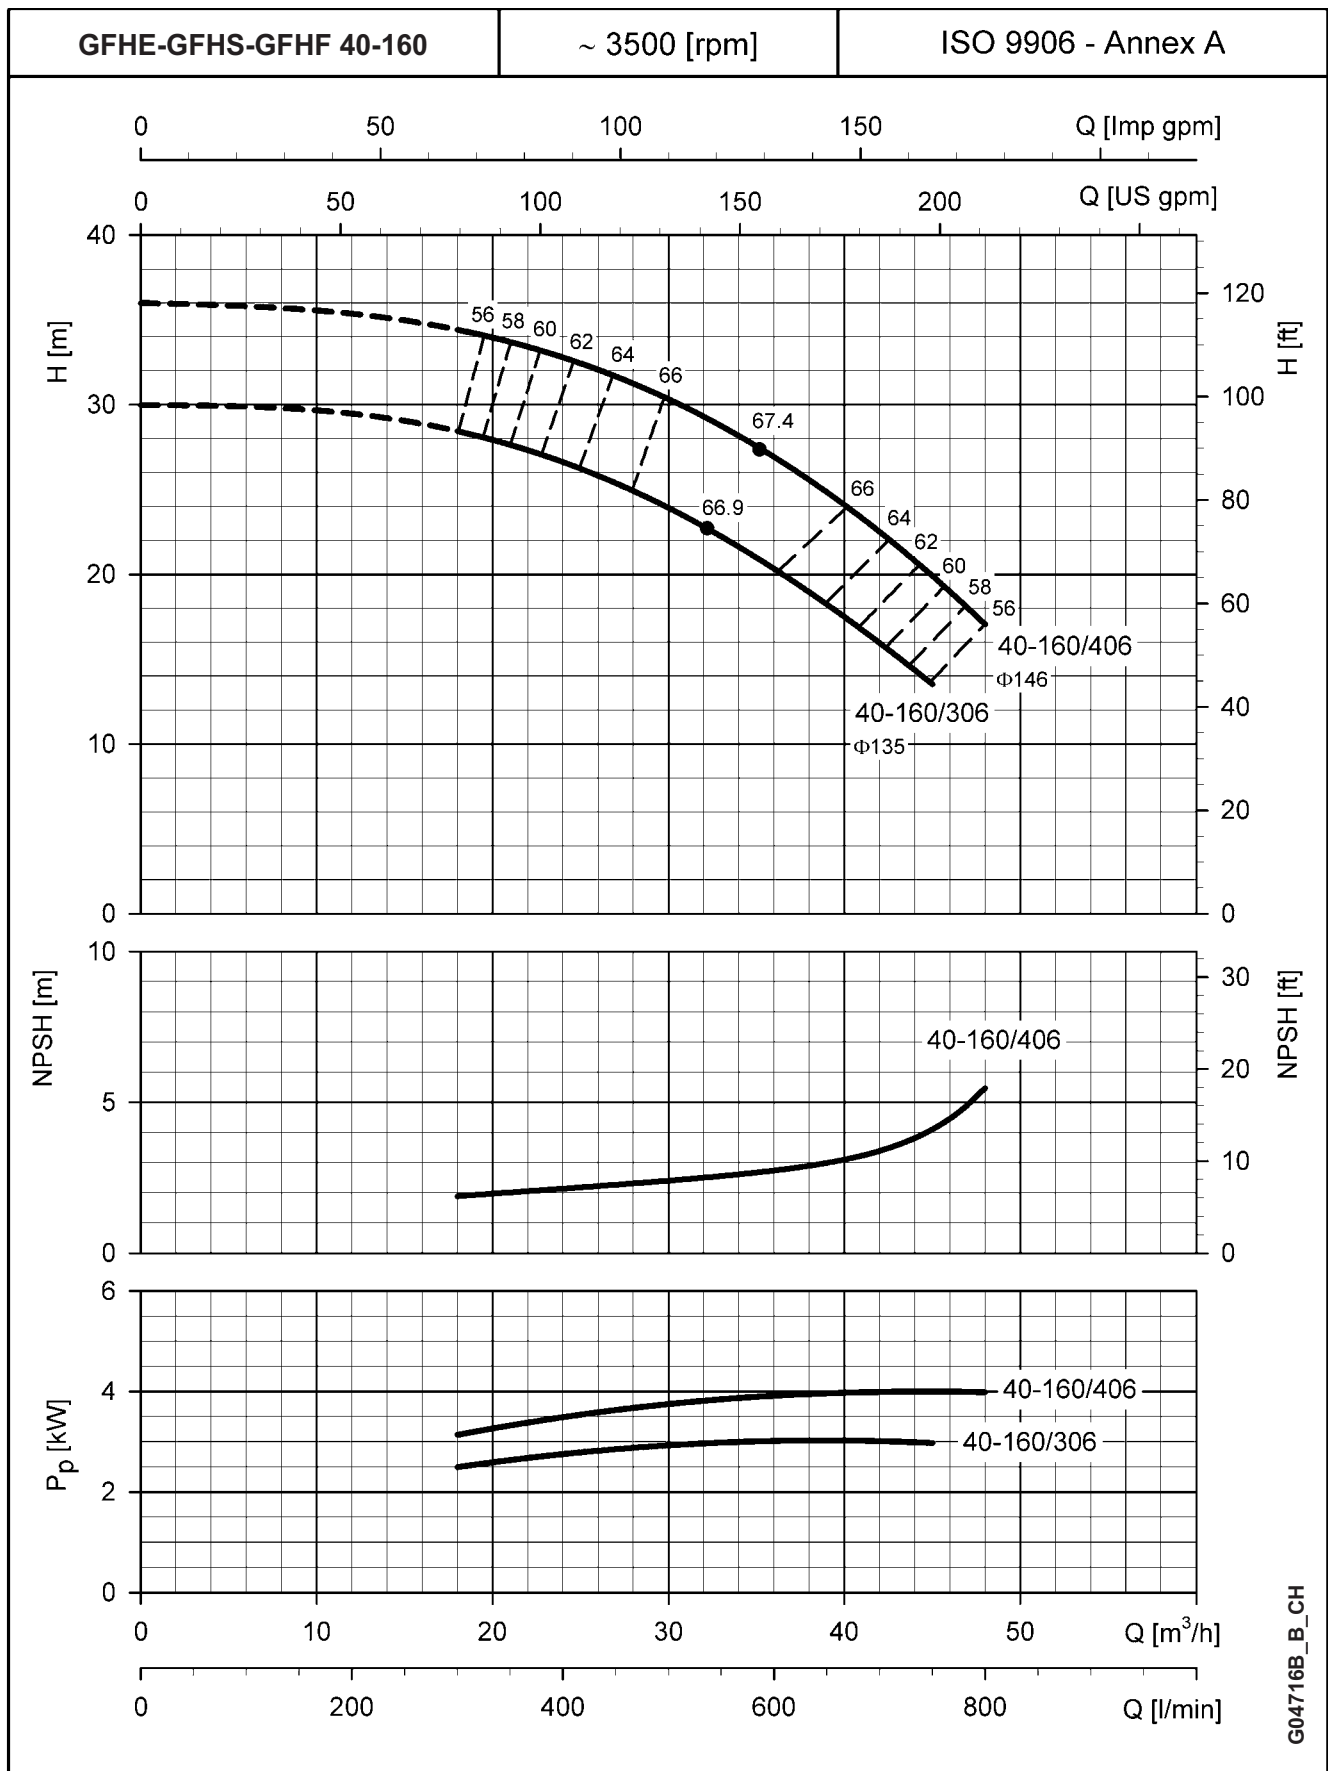


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE-GFHS-GFHF SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 2 POLES**

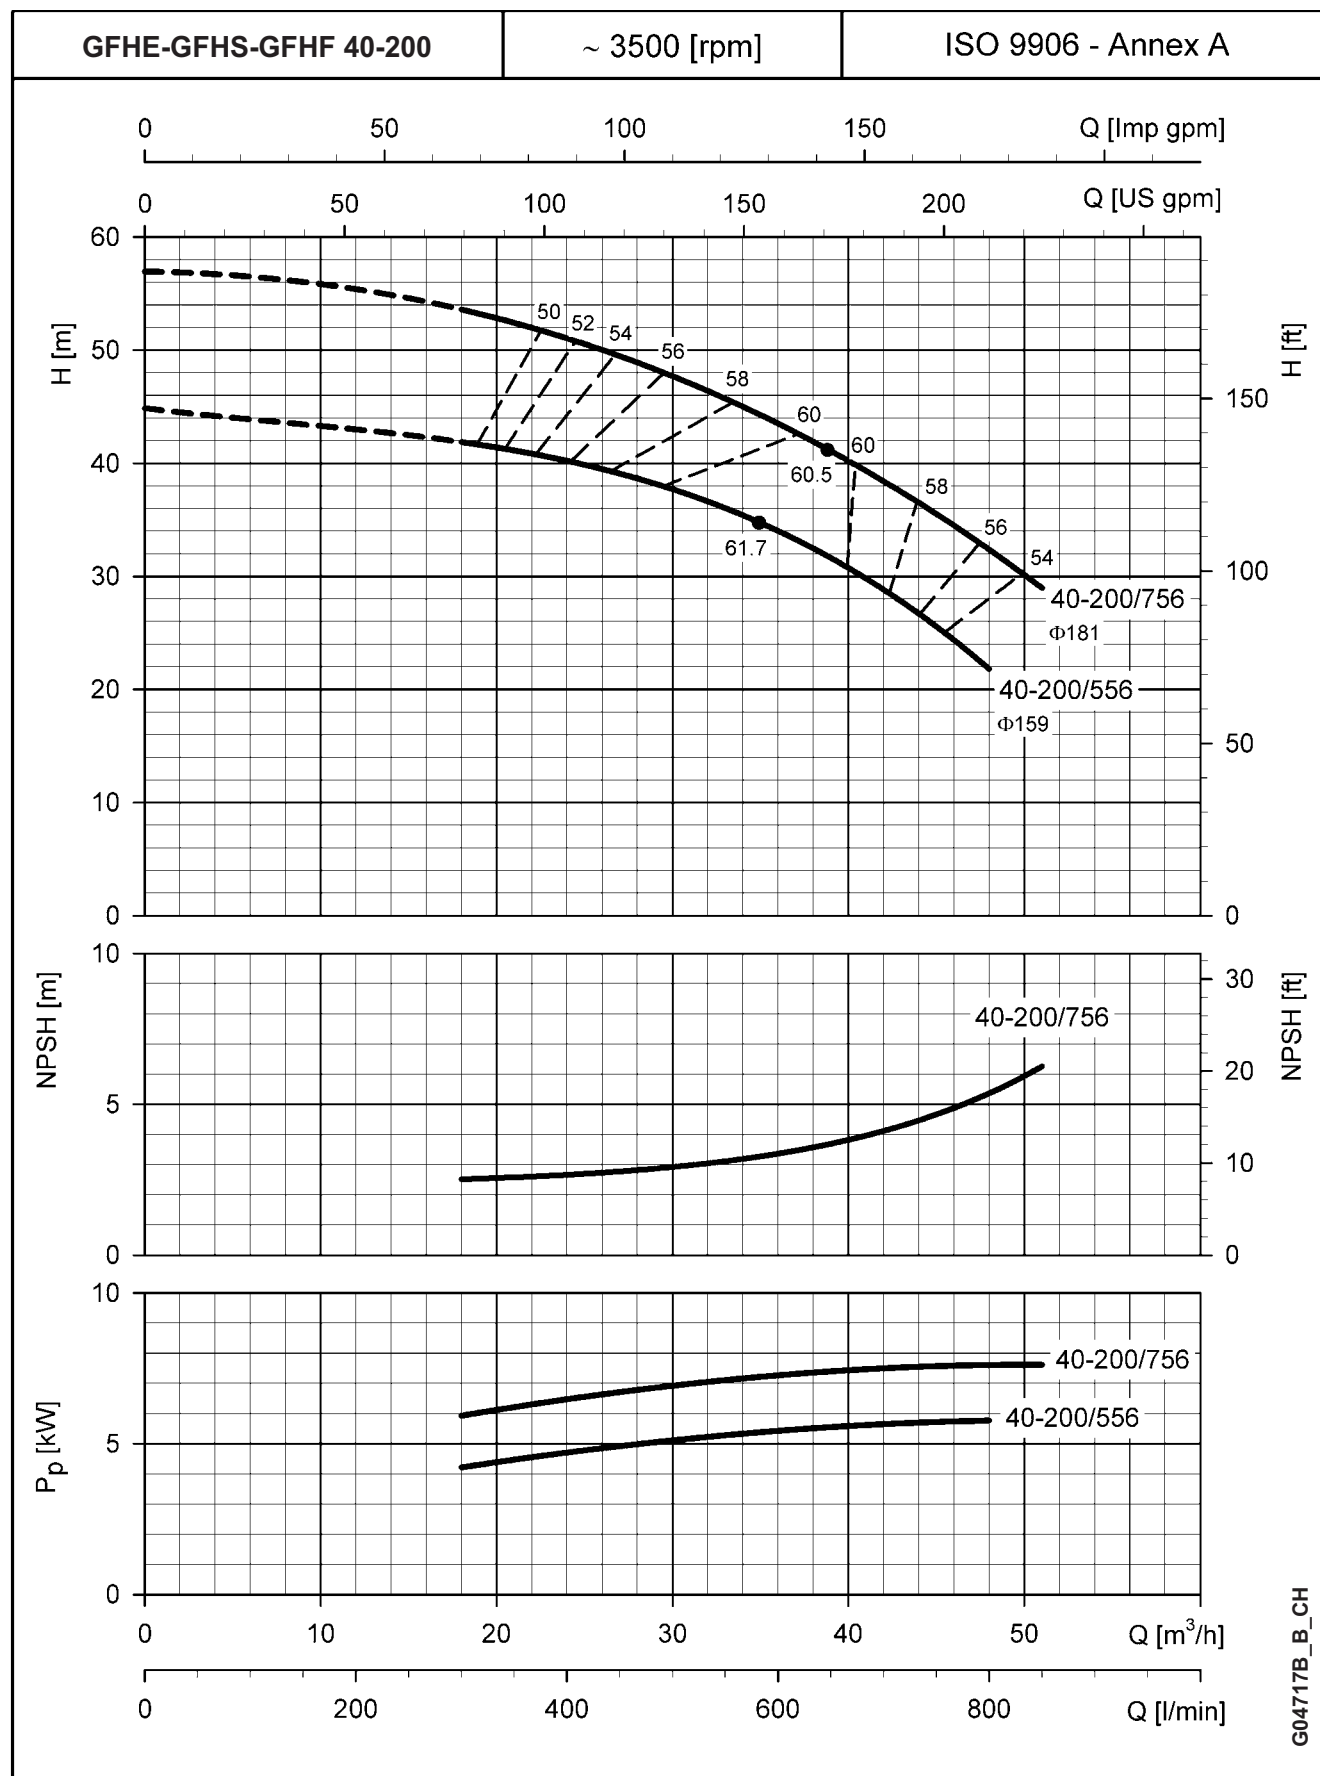


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE-GFHS-GFHF SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 2 POLES**

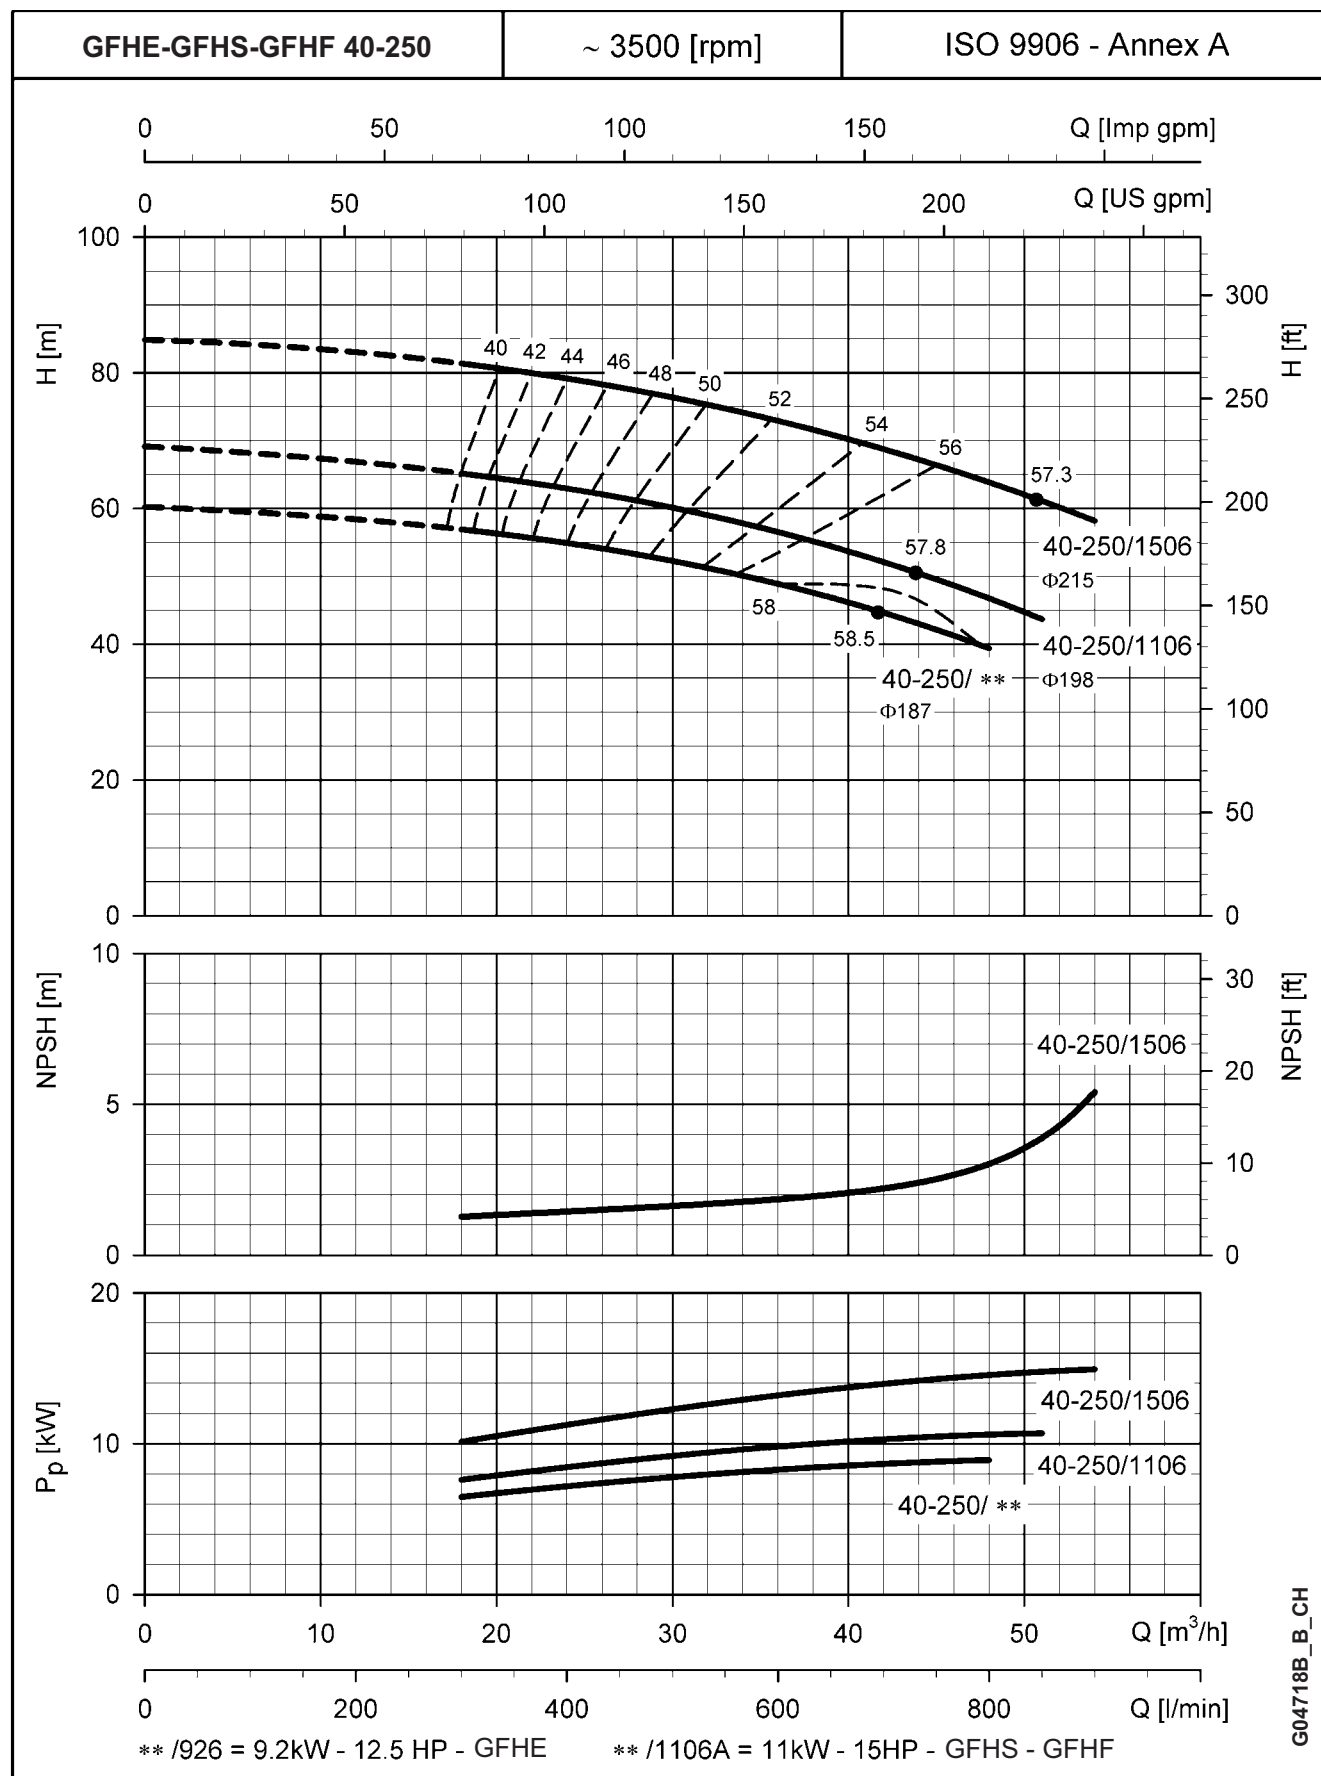


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE-GFHS-GFHF SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 2 POLES**

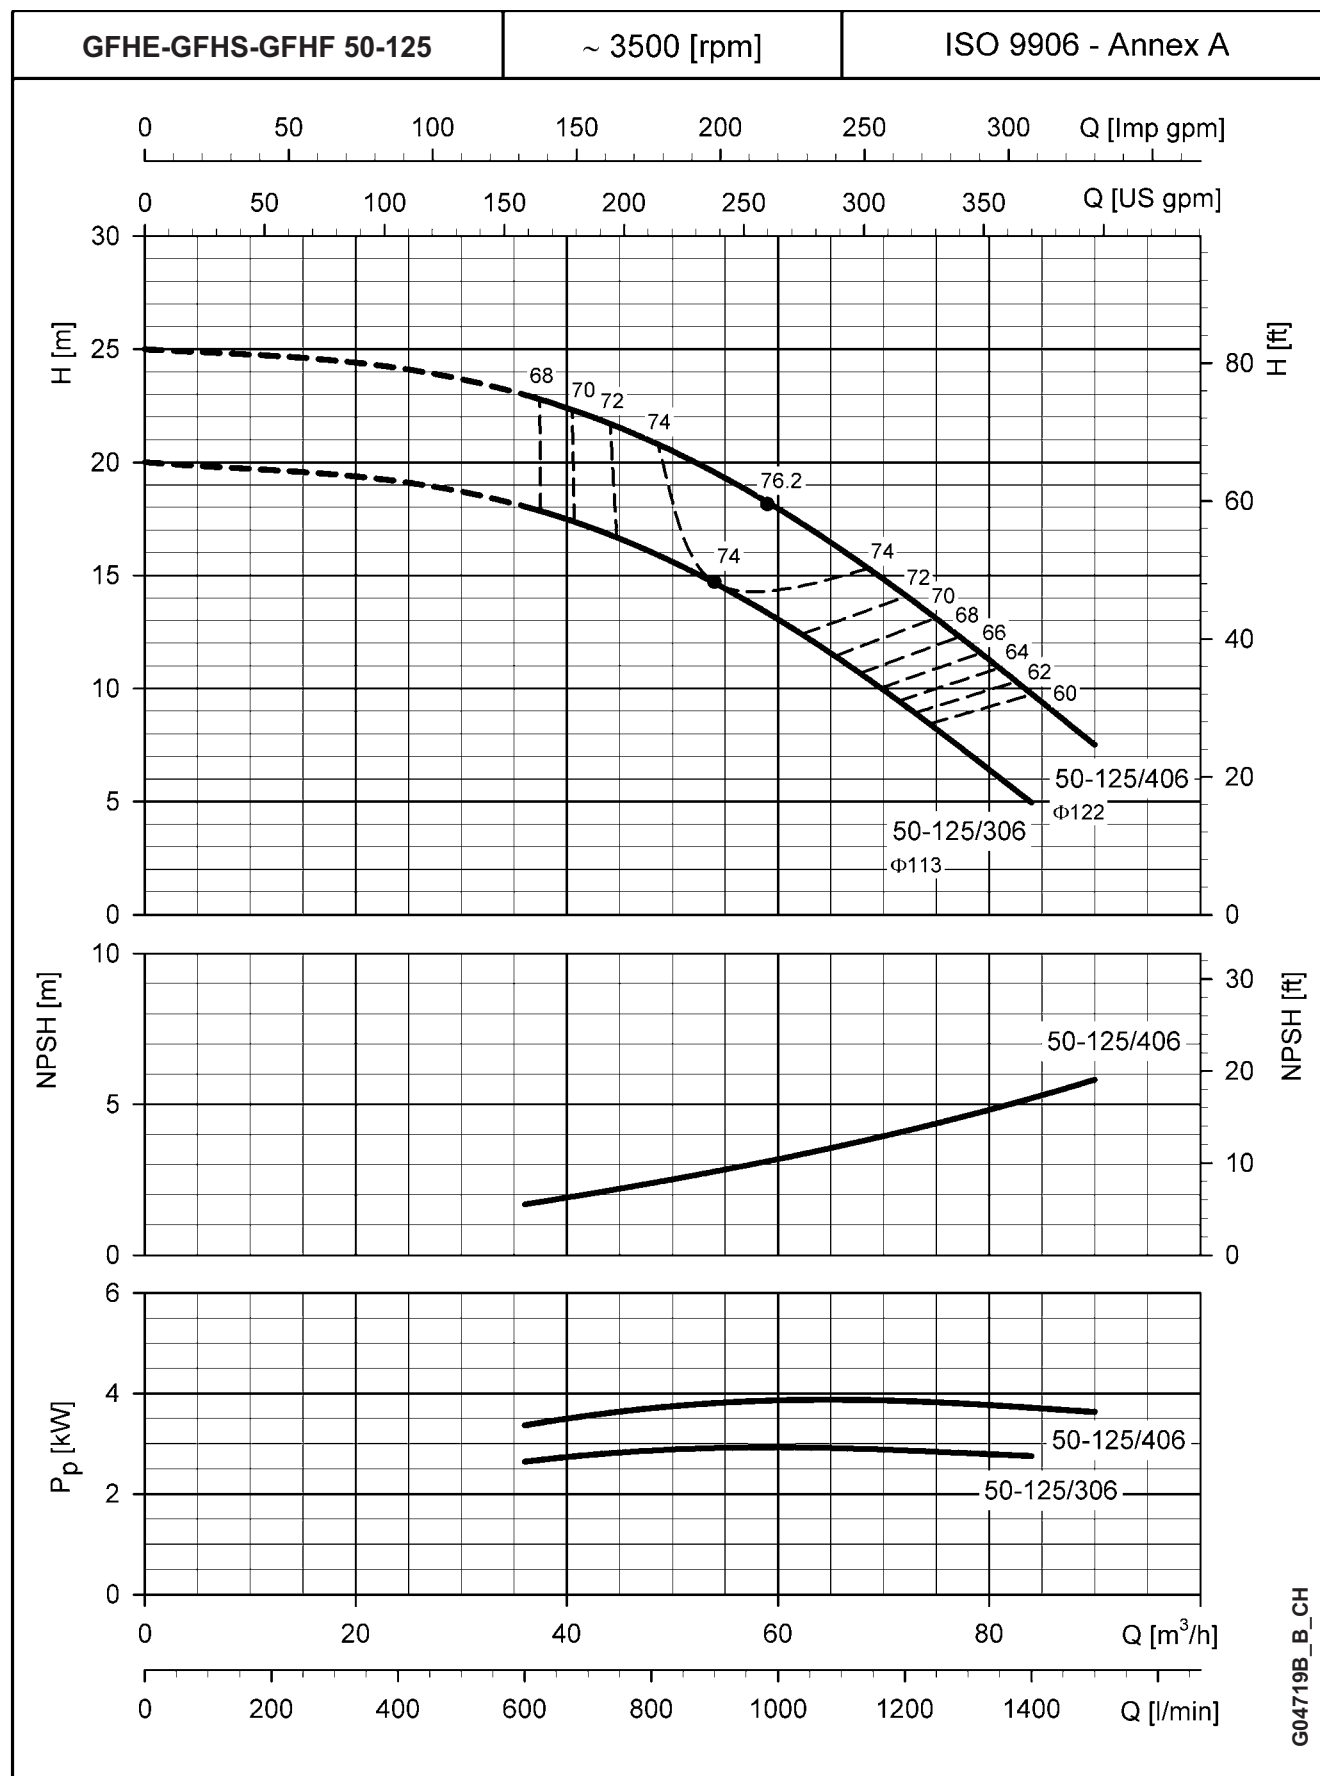


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE-GFHS-GFHF SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 2 POLES**

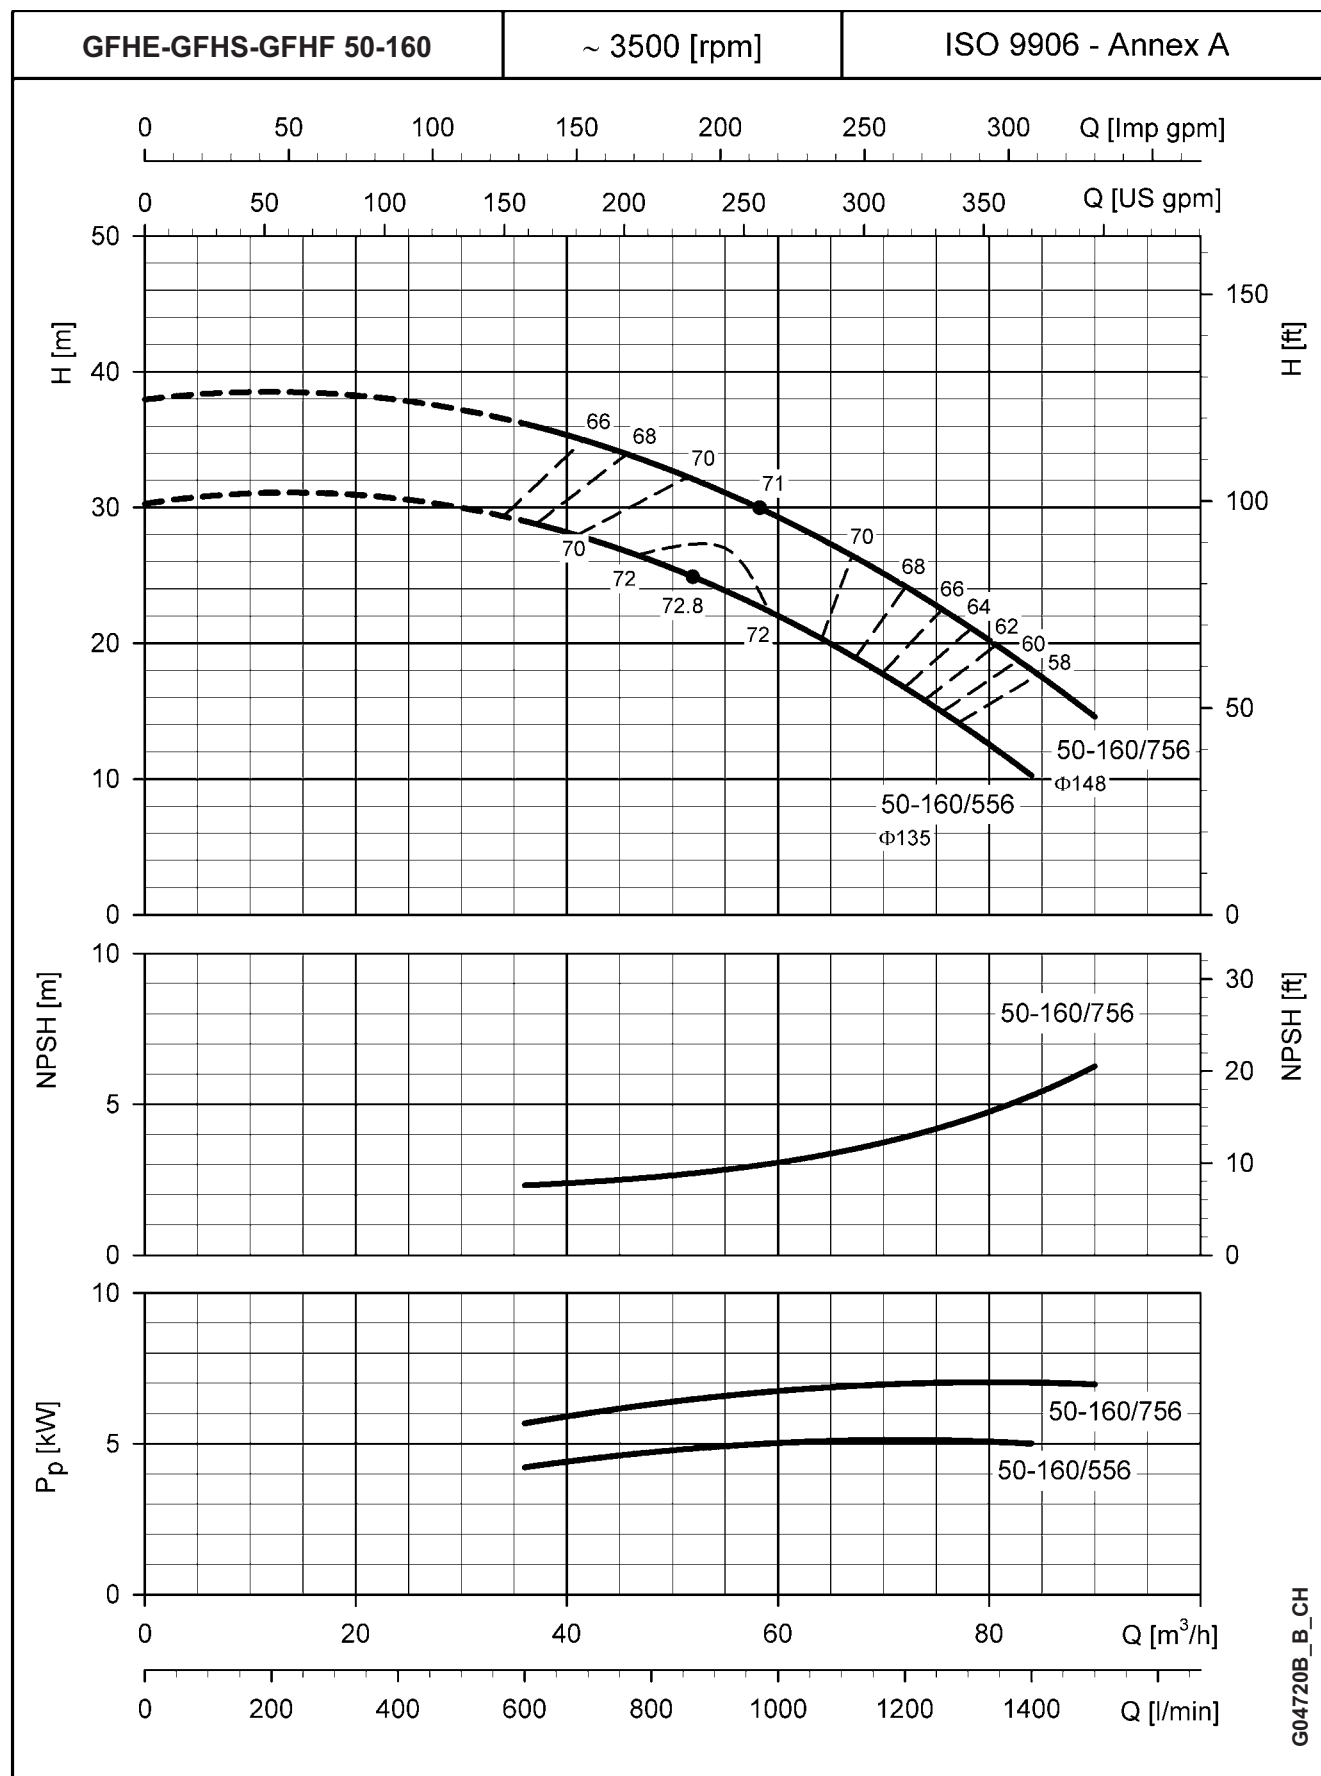


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE-GFHS-GFHF SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 2 POLES**

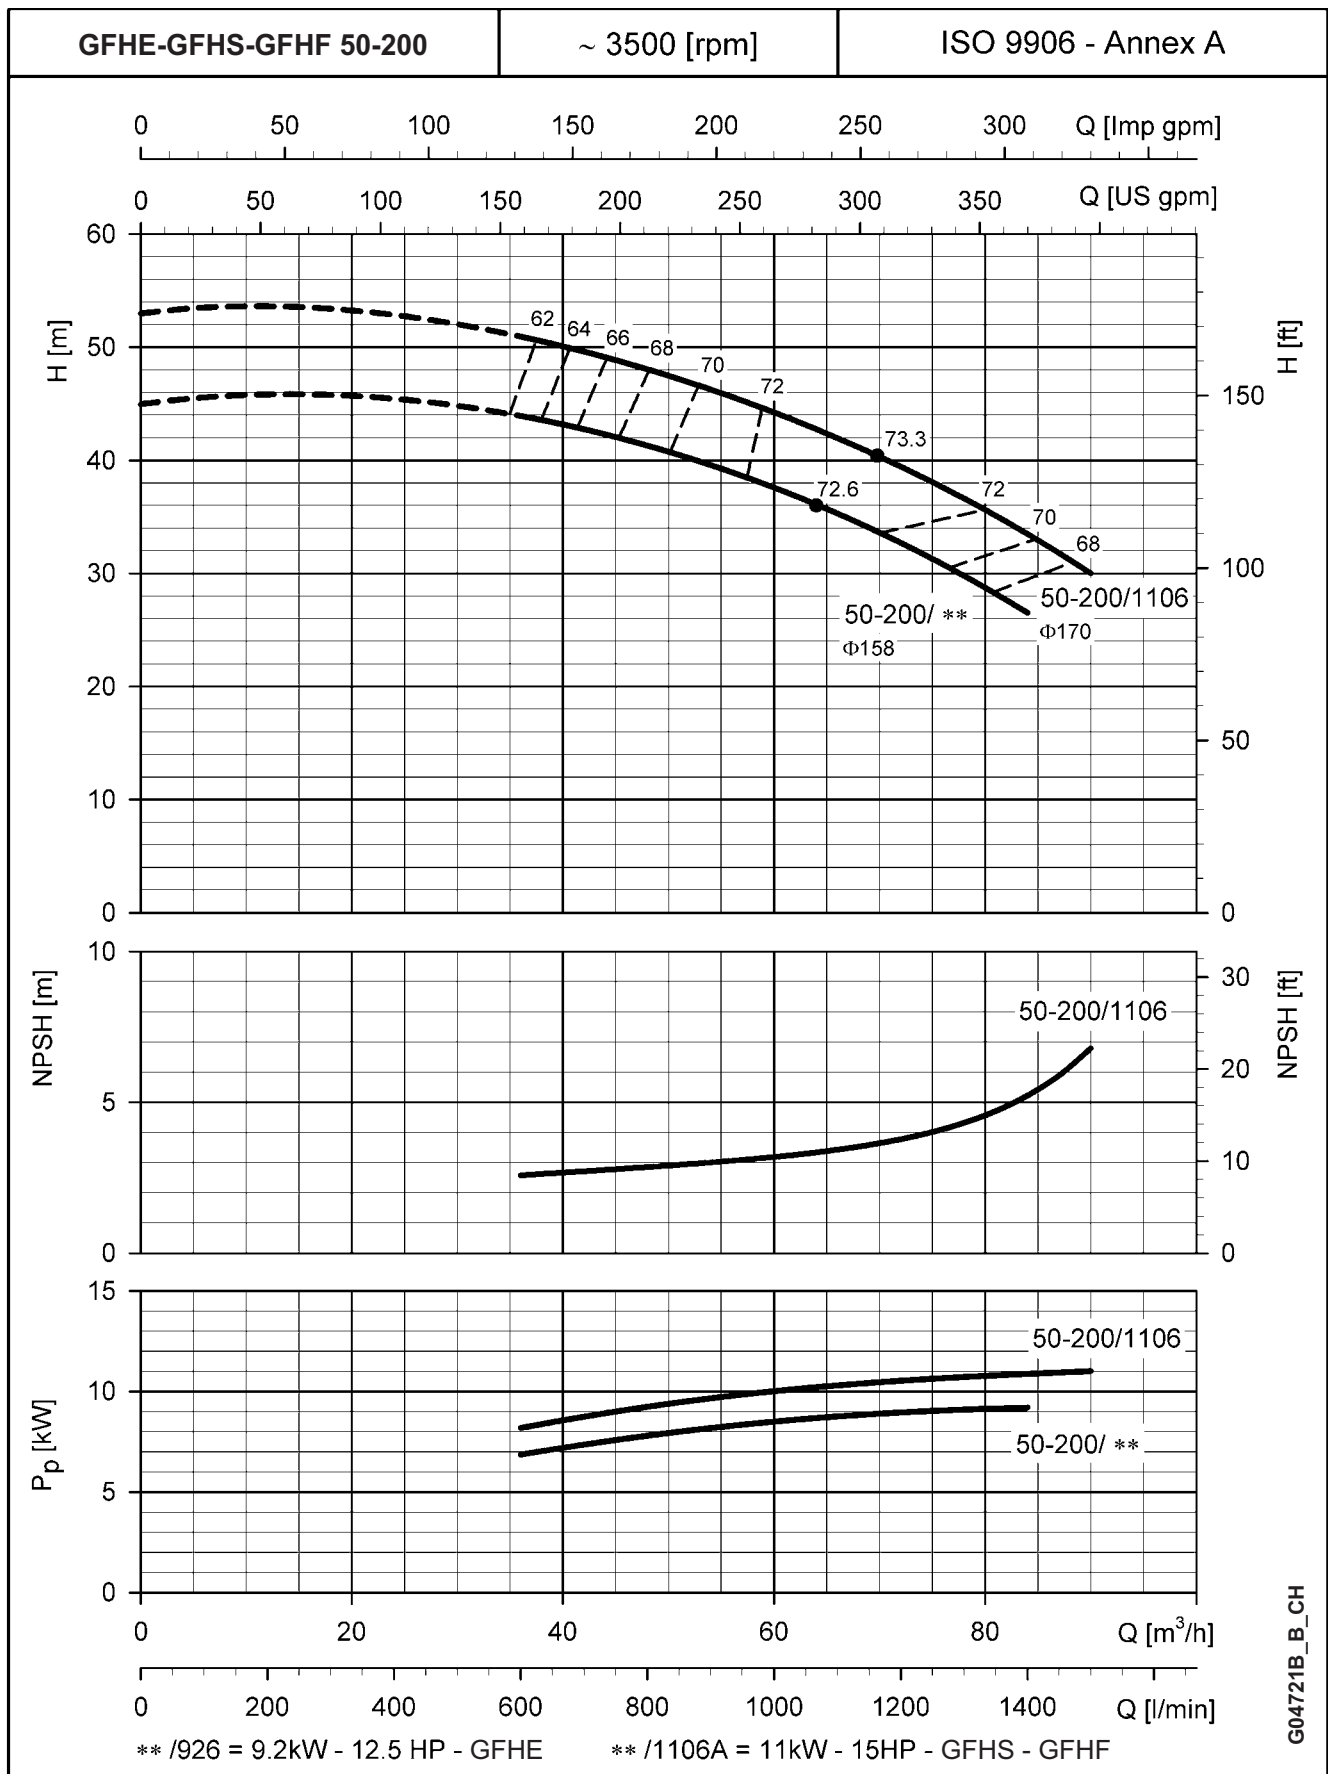


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE-GFHS-GFHF SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 2 POLES**

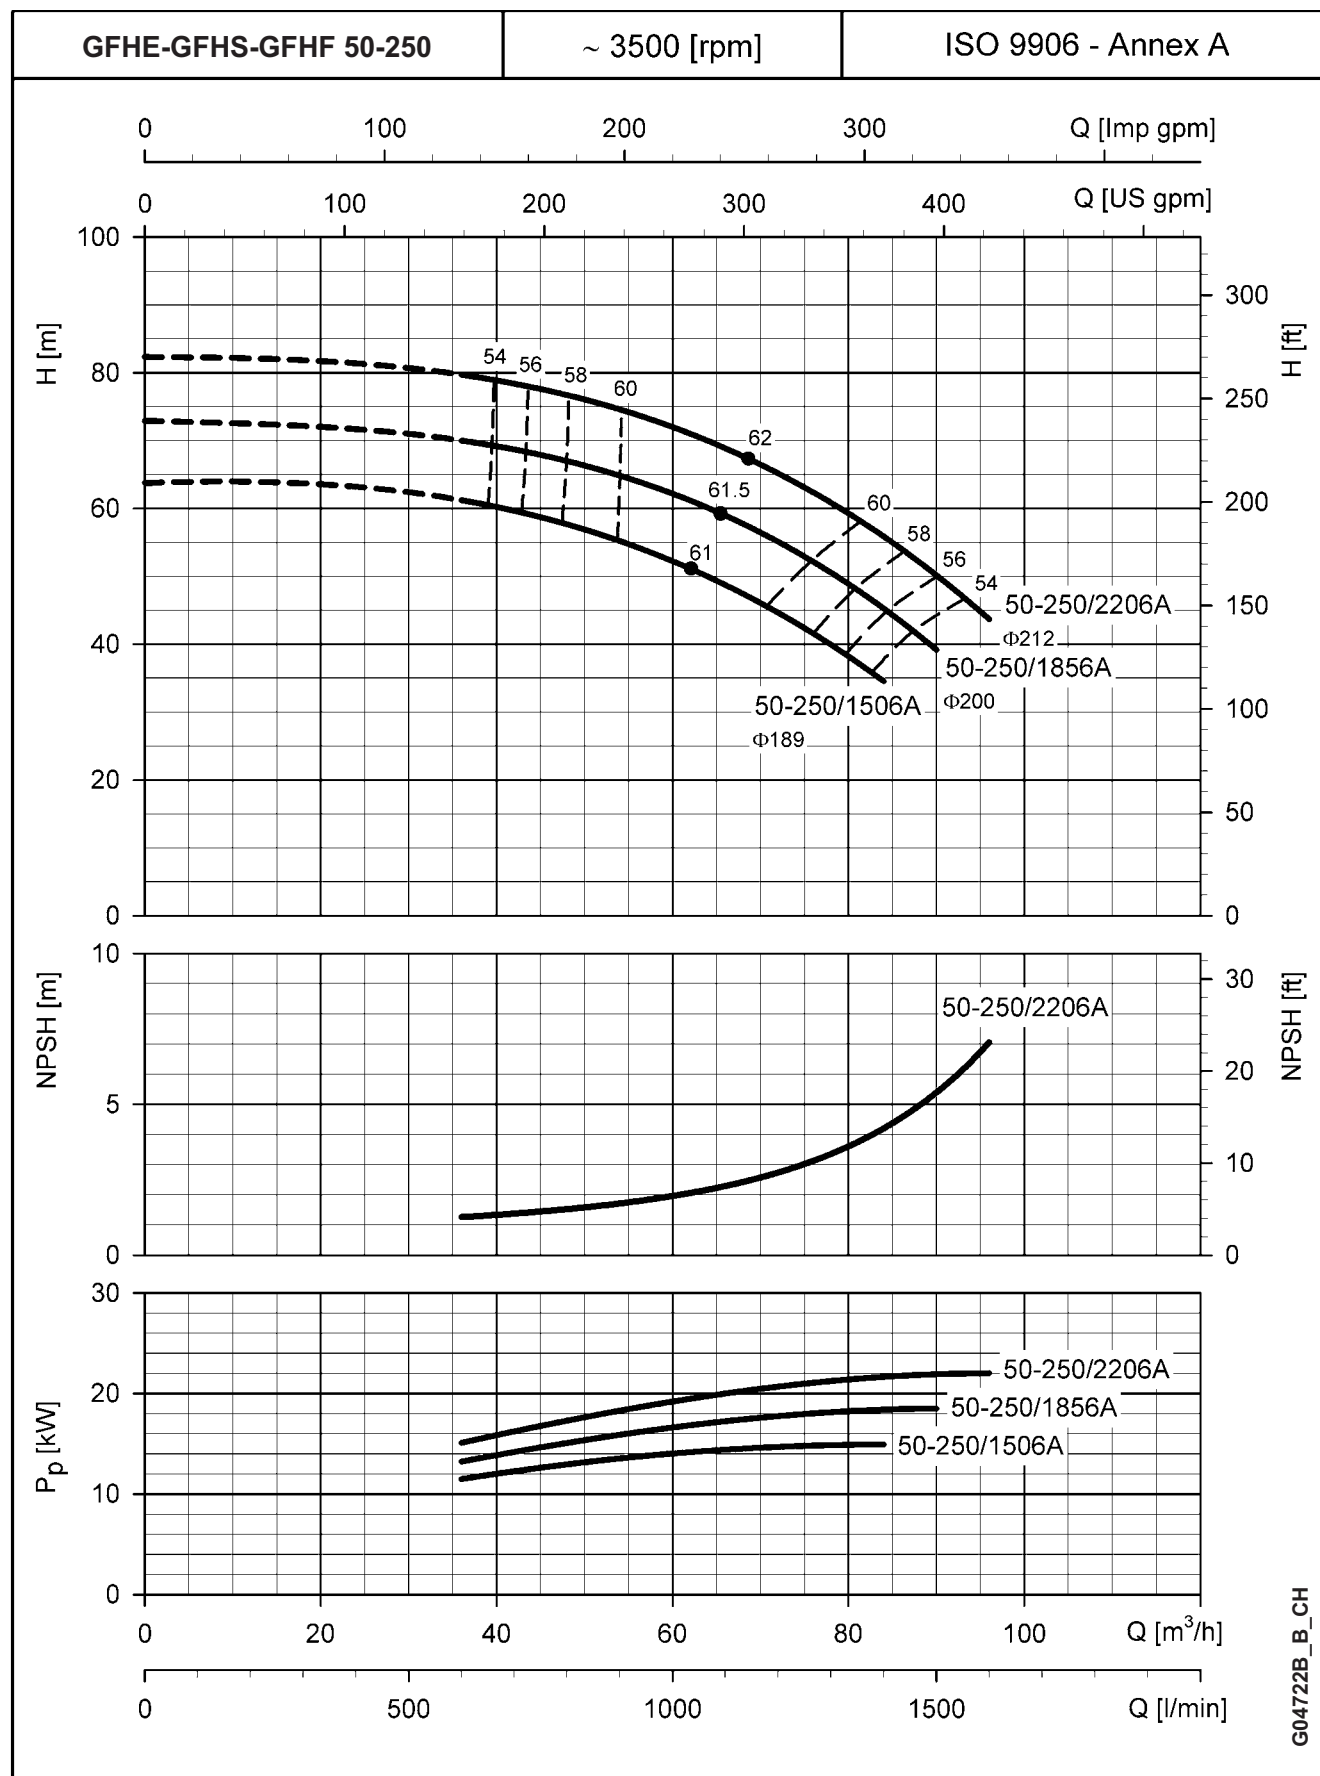


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE-GFHS-GFHF SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 2 POLES**

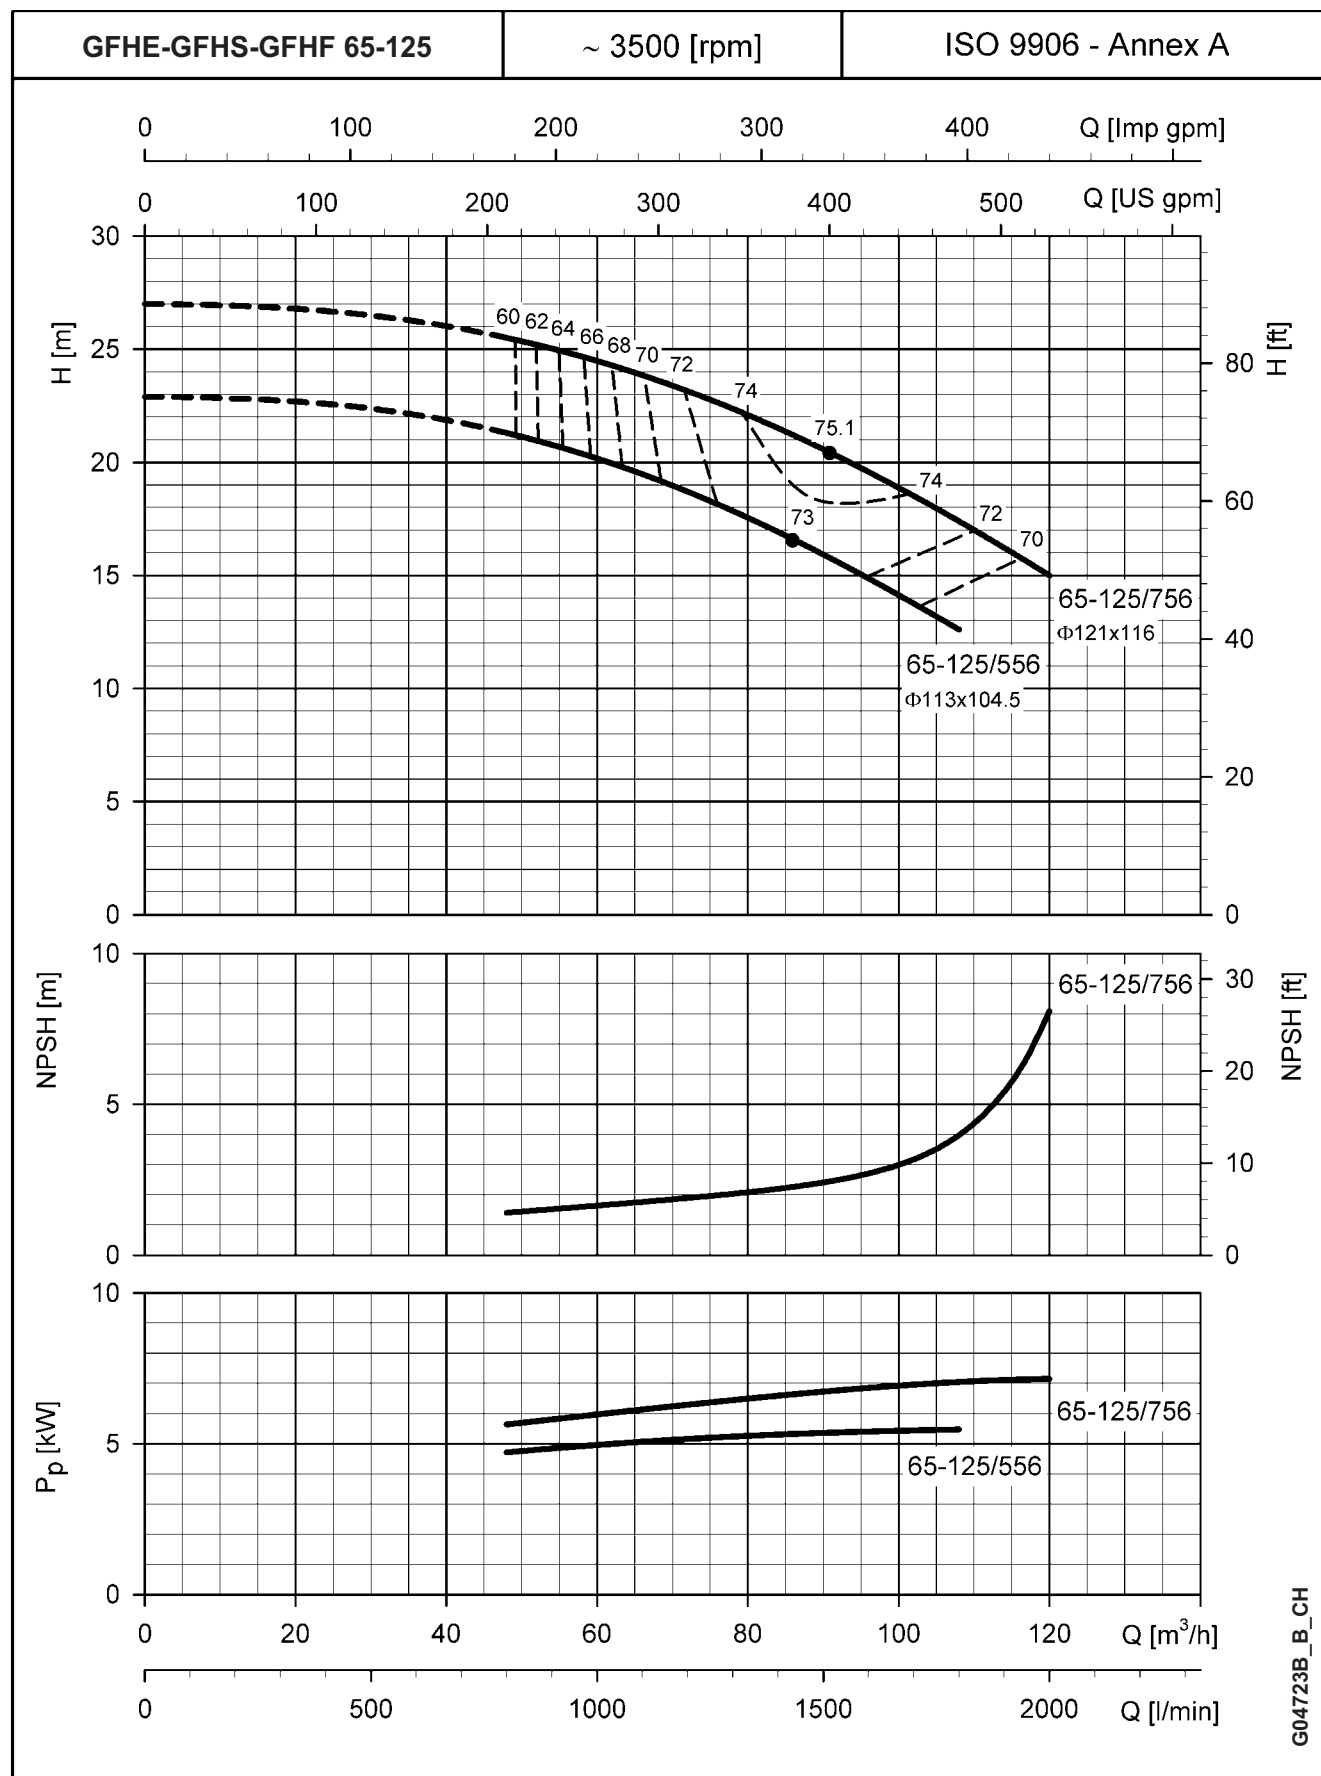


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE-GFHS-GFHF SERIES OPERATING CHARACTERISTICS AT 60 Hz, 2 POLES

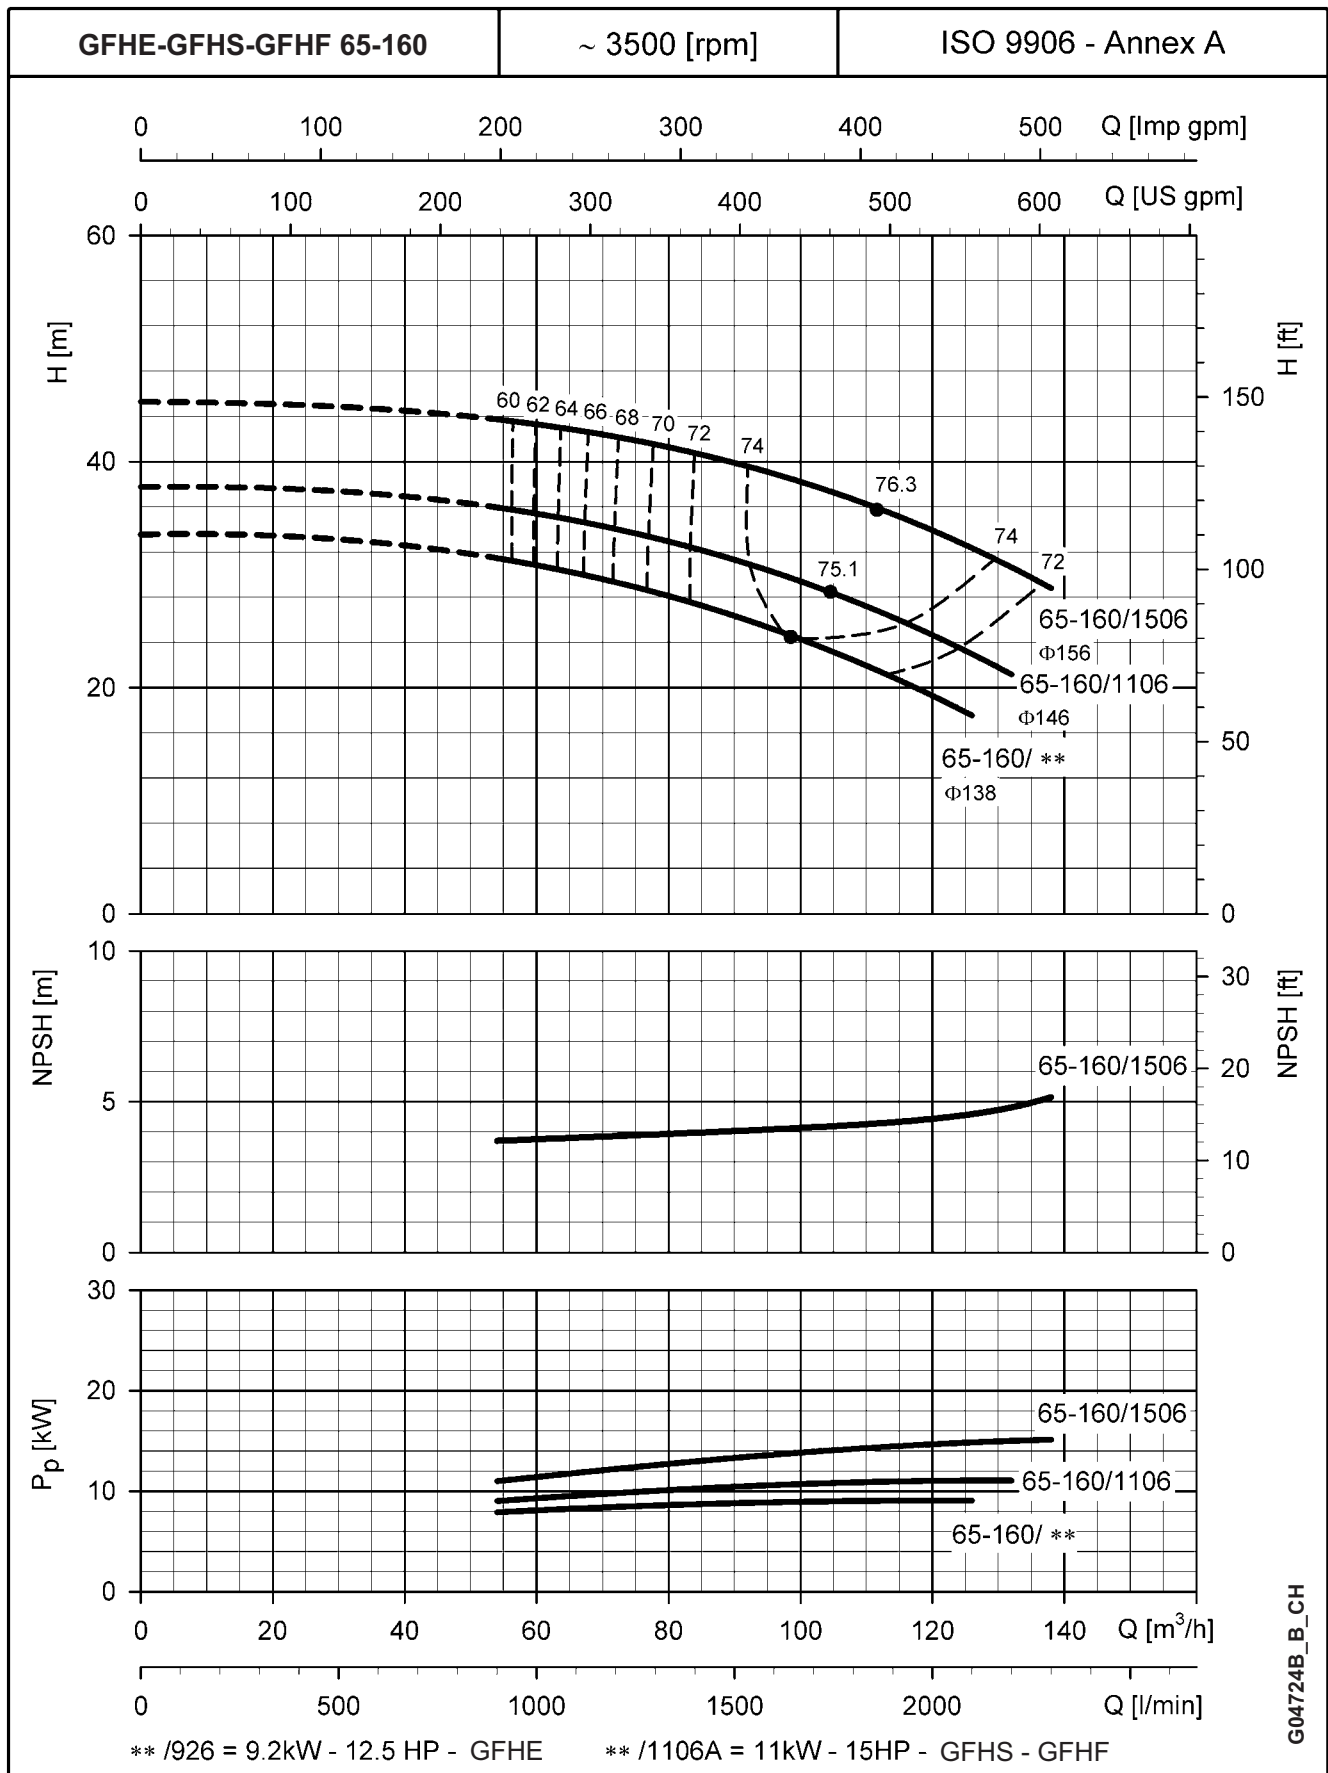


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE-GFHS-GFHF SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 2 POLES**

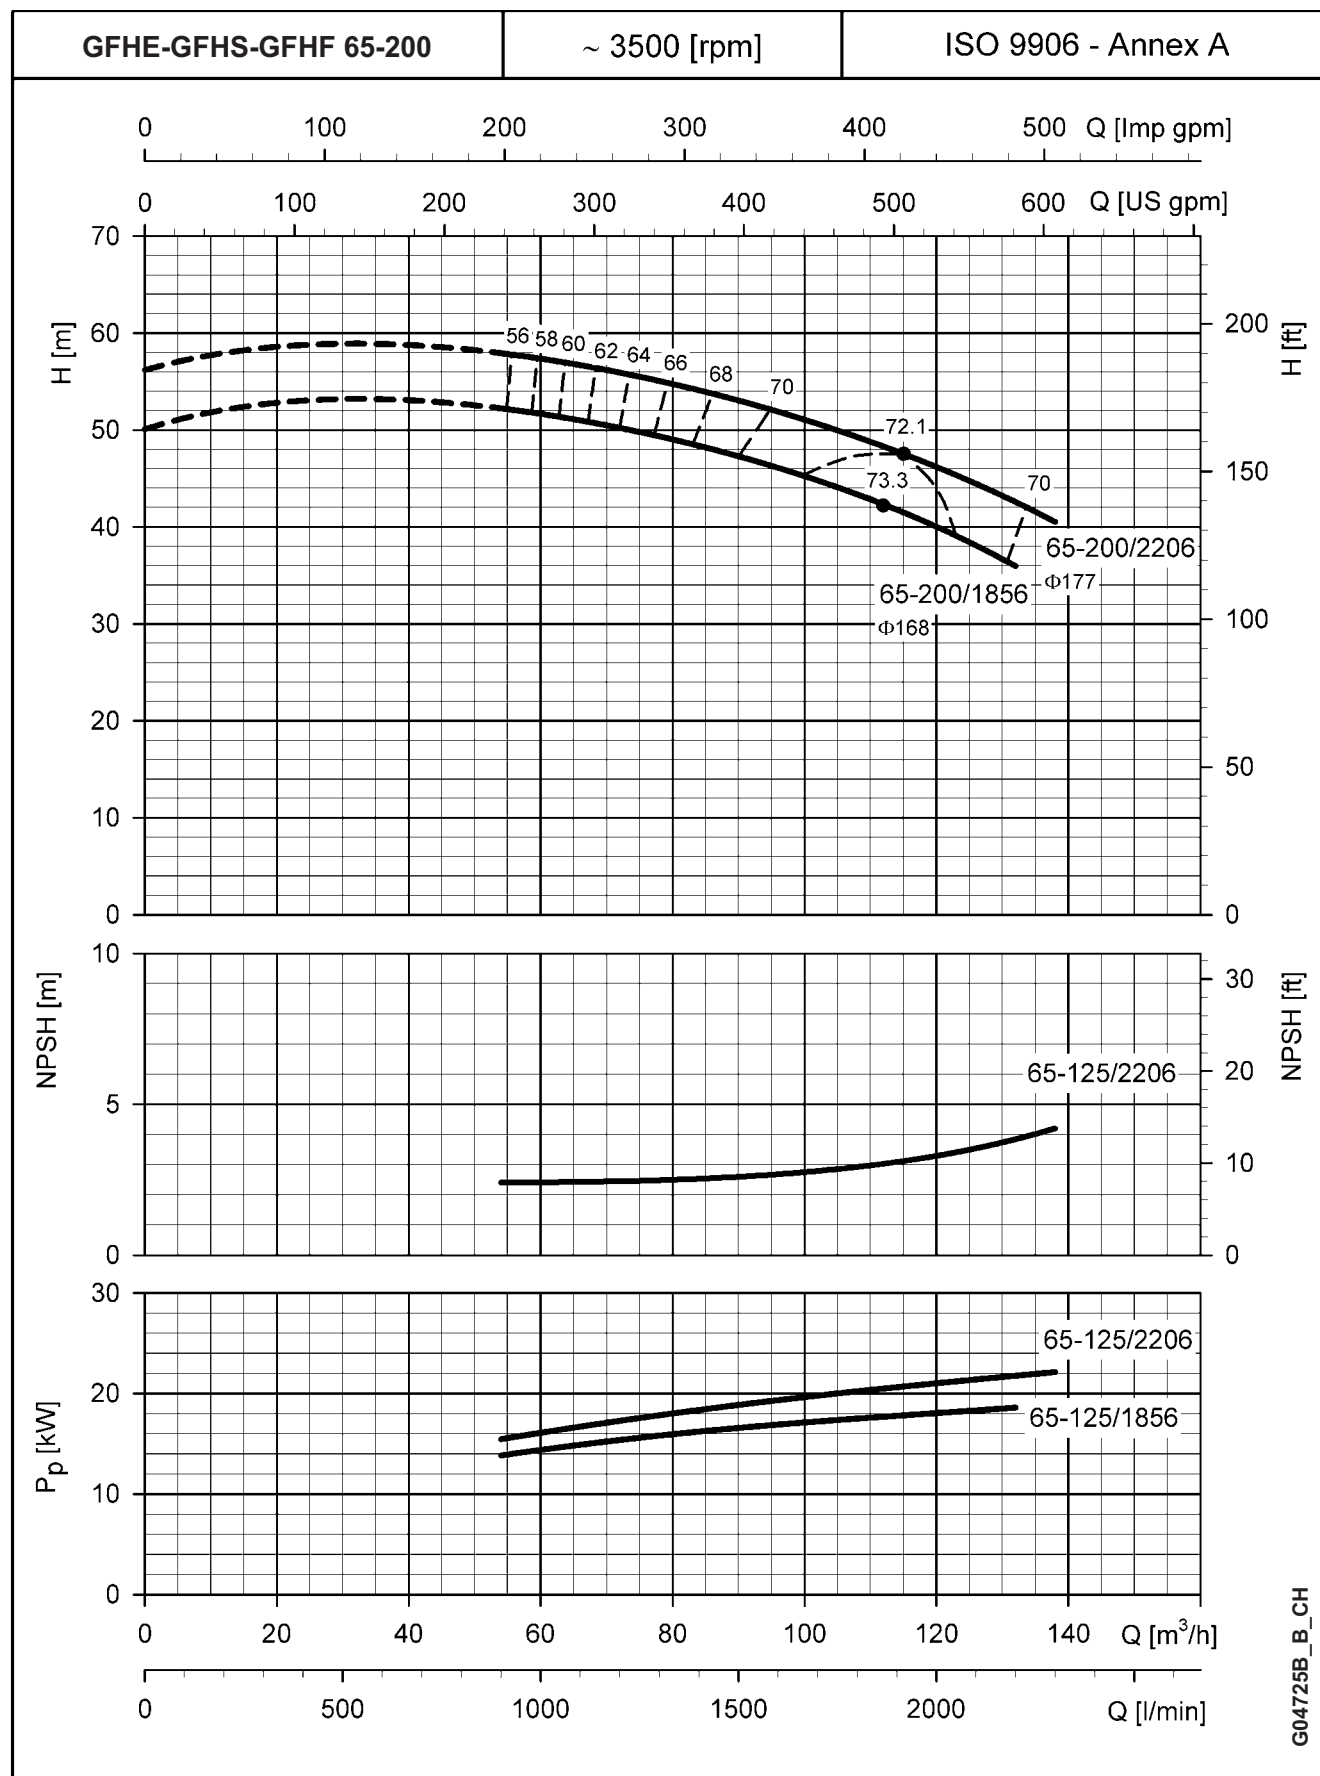


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE-GFHS-GFHF SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 2 POLES**

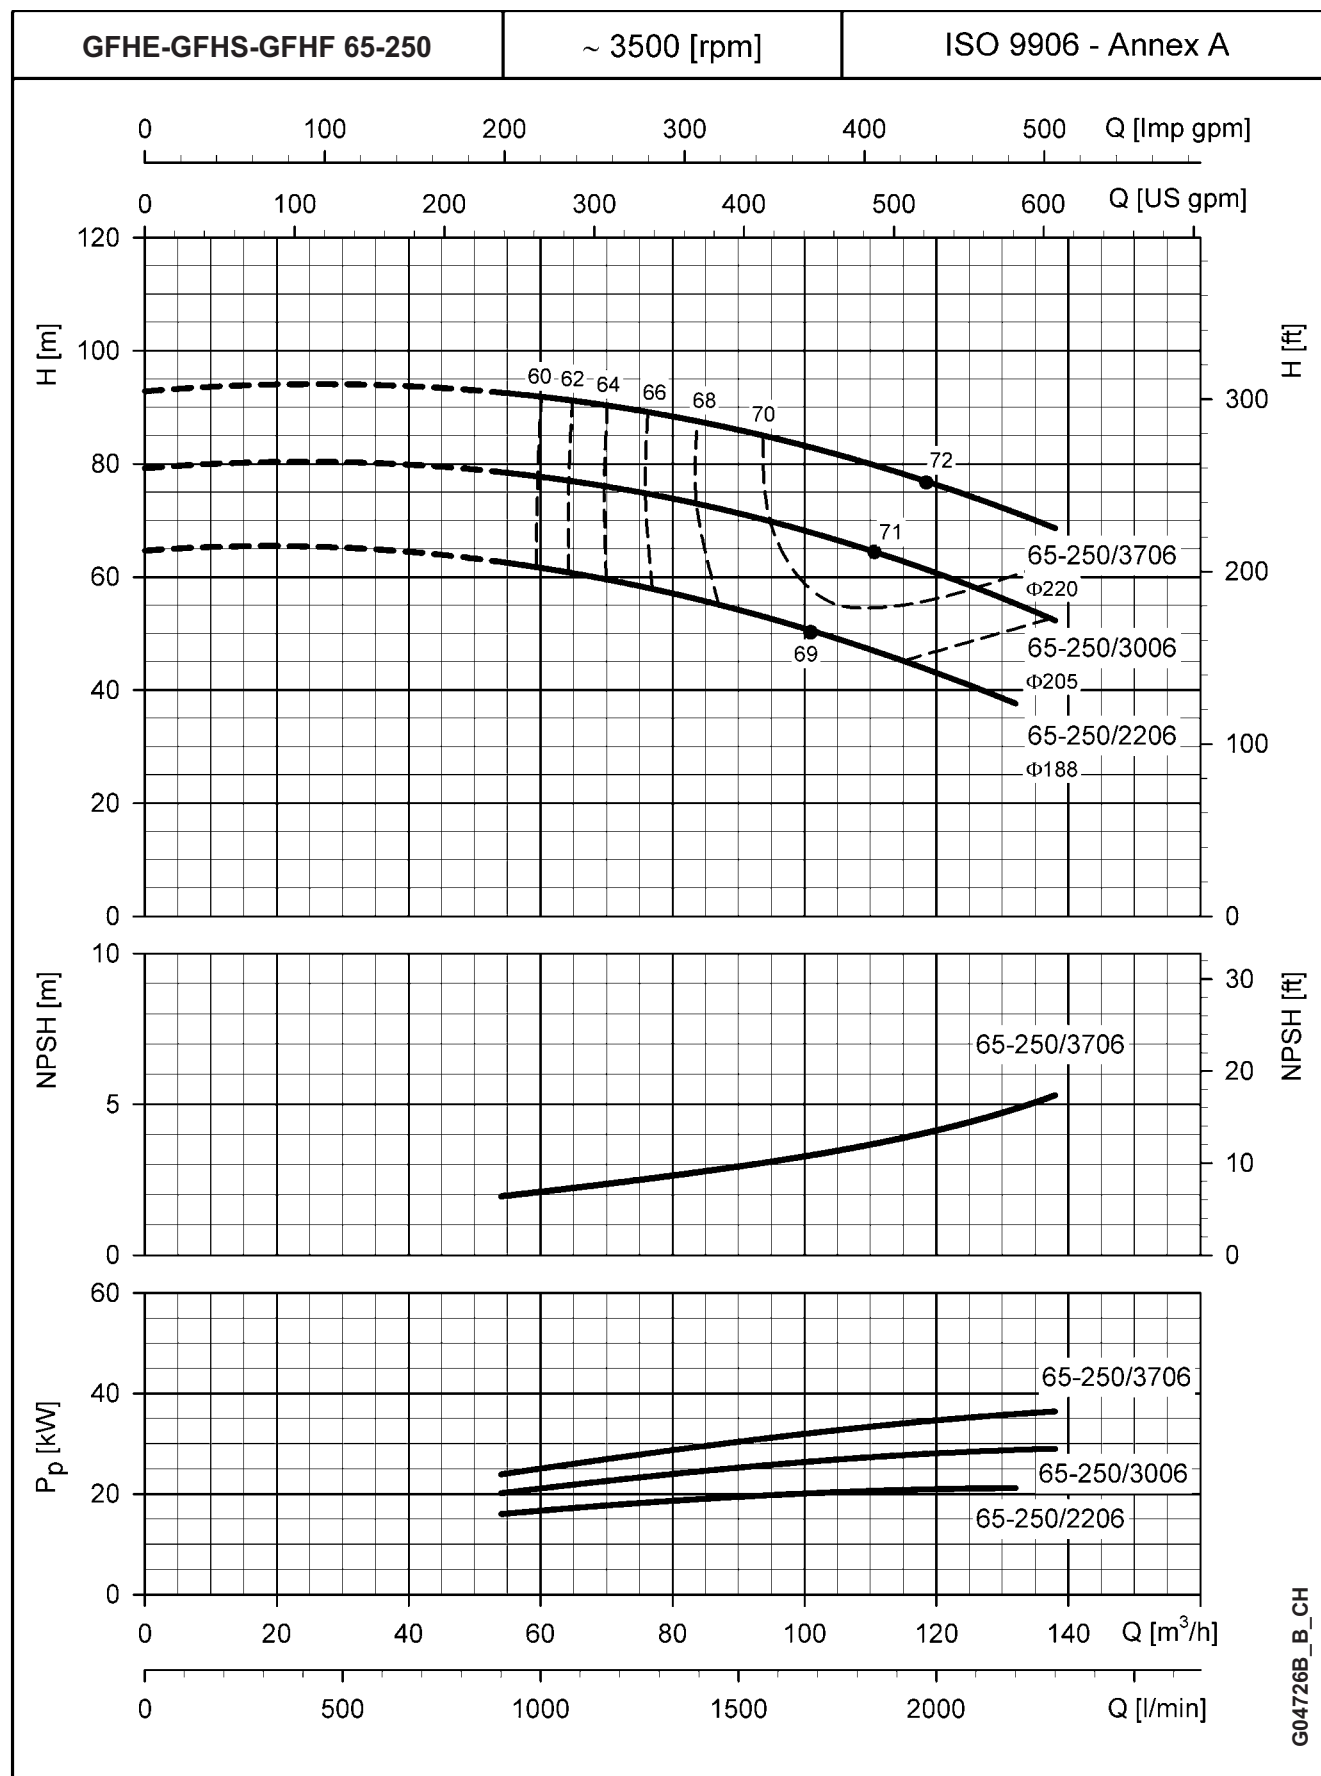


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE-GFHS-GFHF SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 2 POLES**

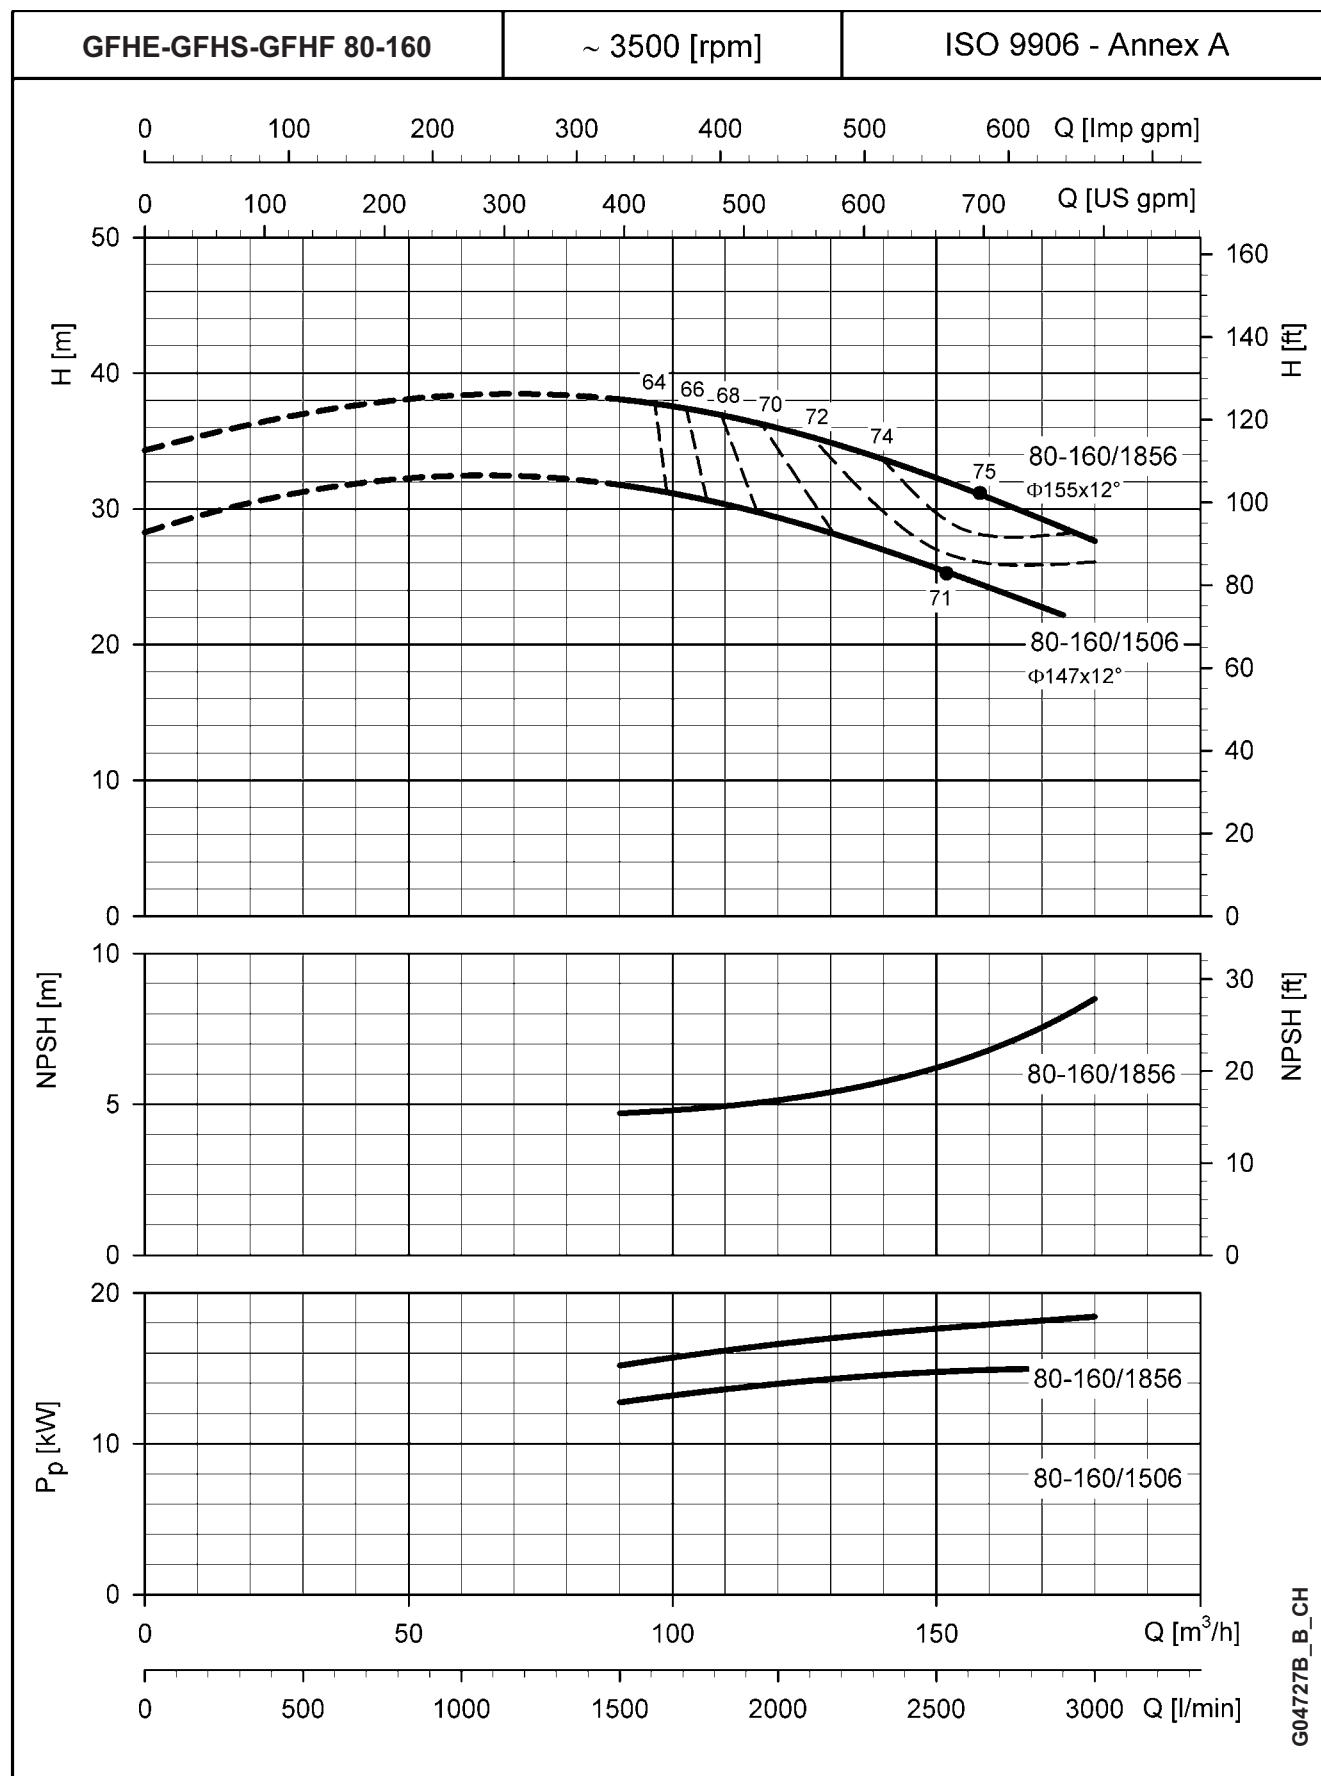


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE-GFHS-GFHF SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 2 POLES**

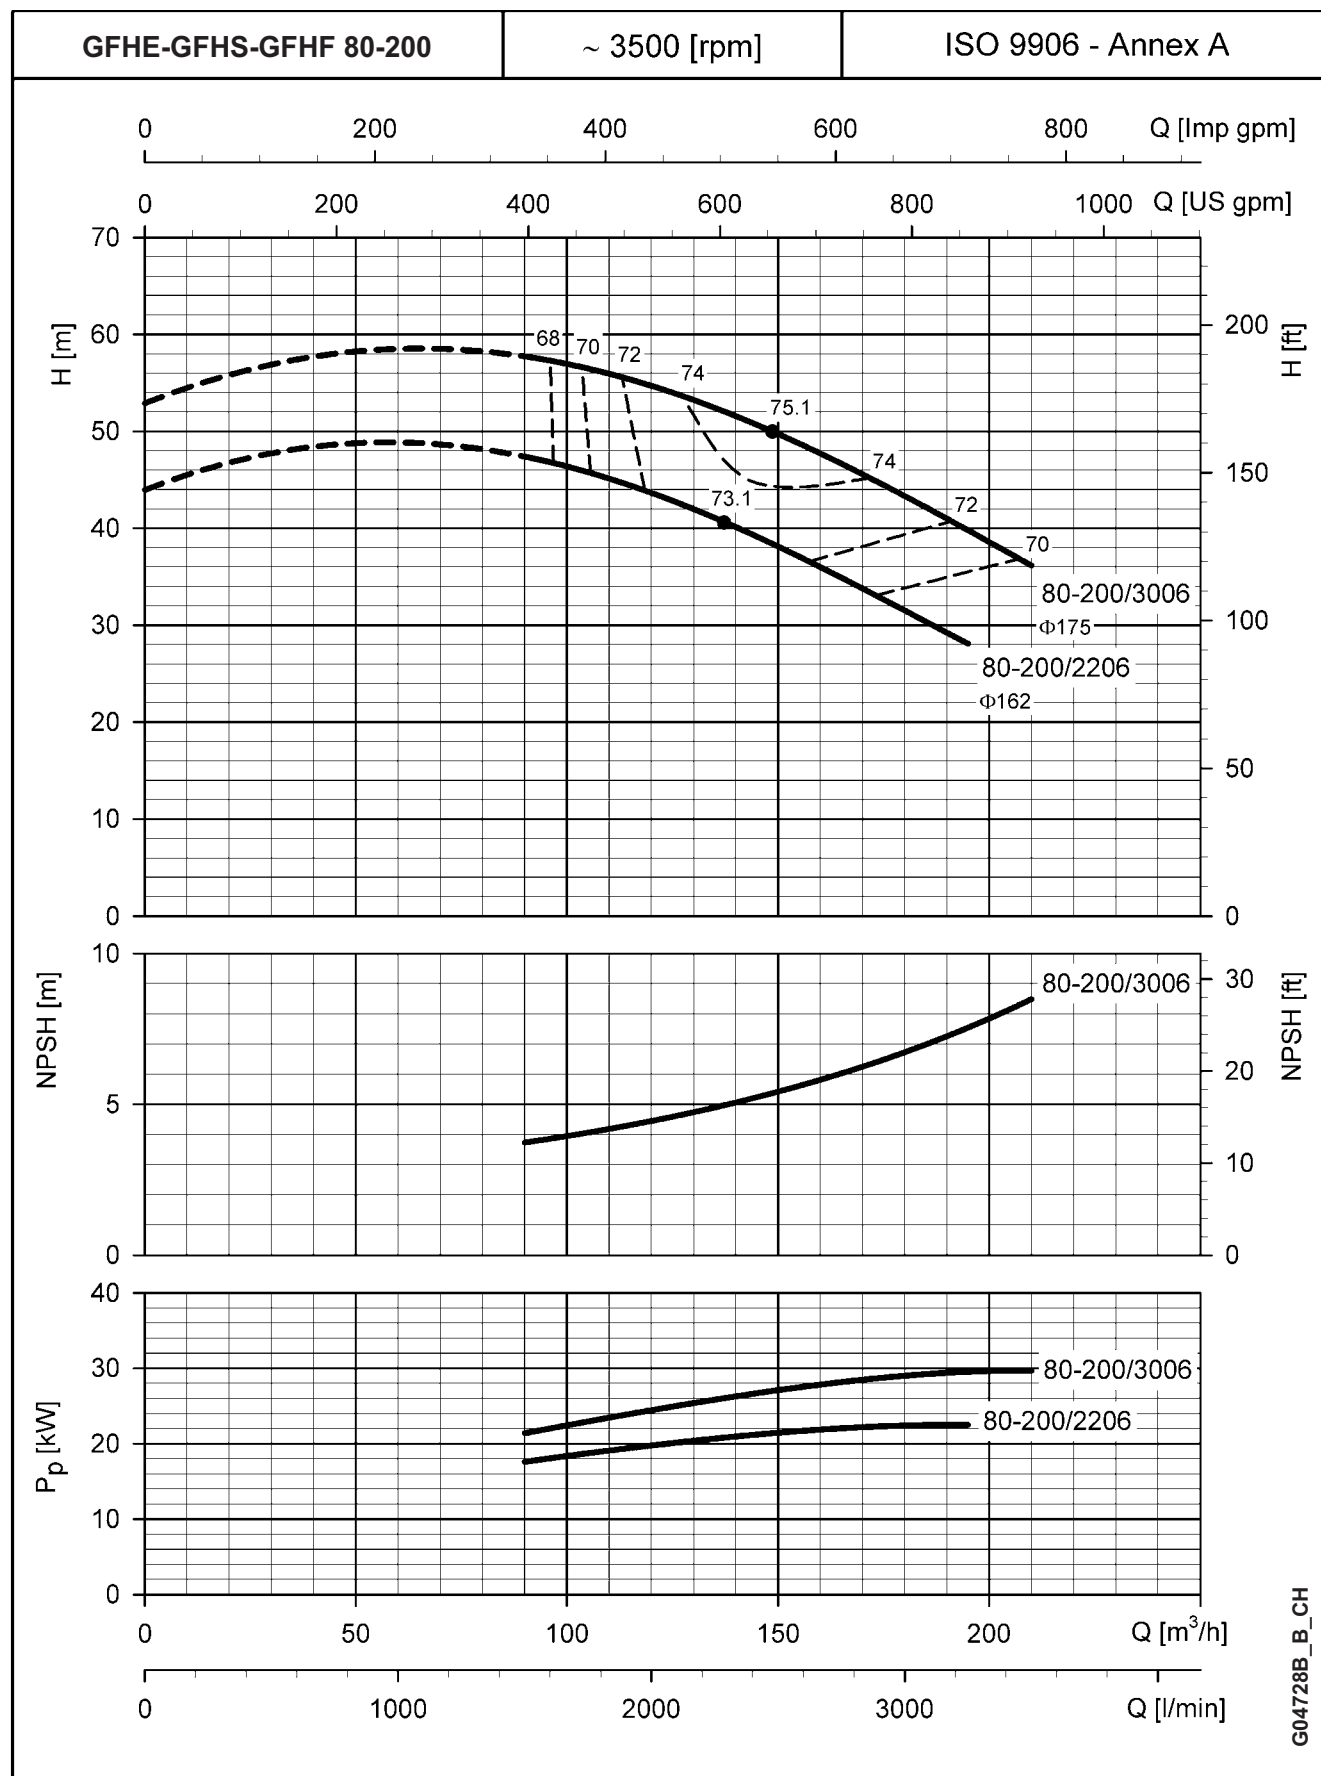


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHS-GFHF SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 2 POLES**

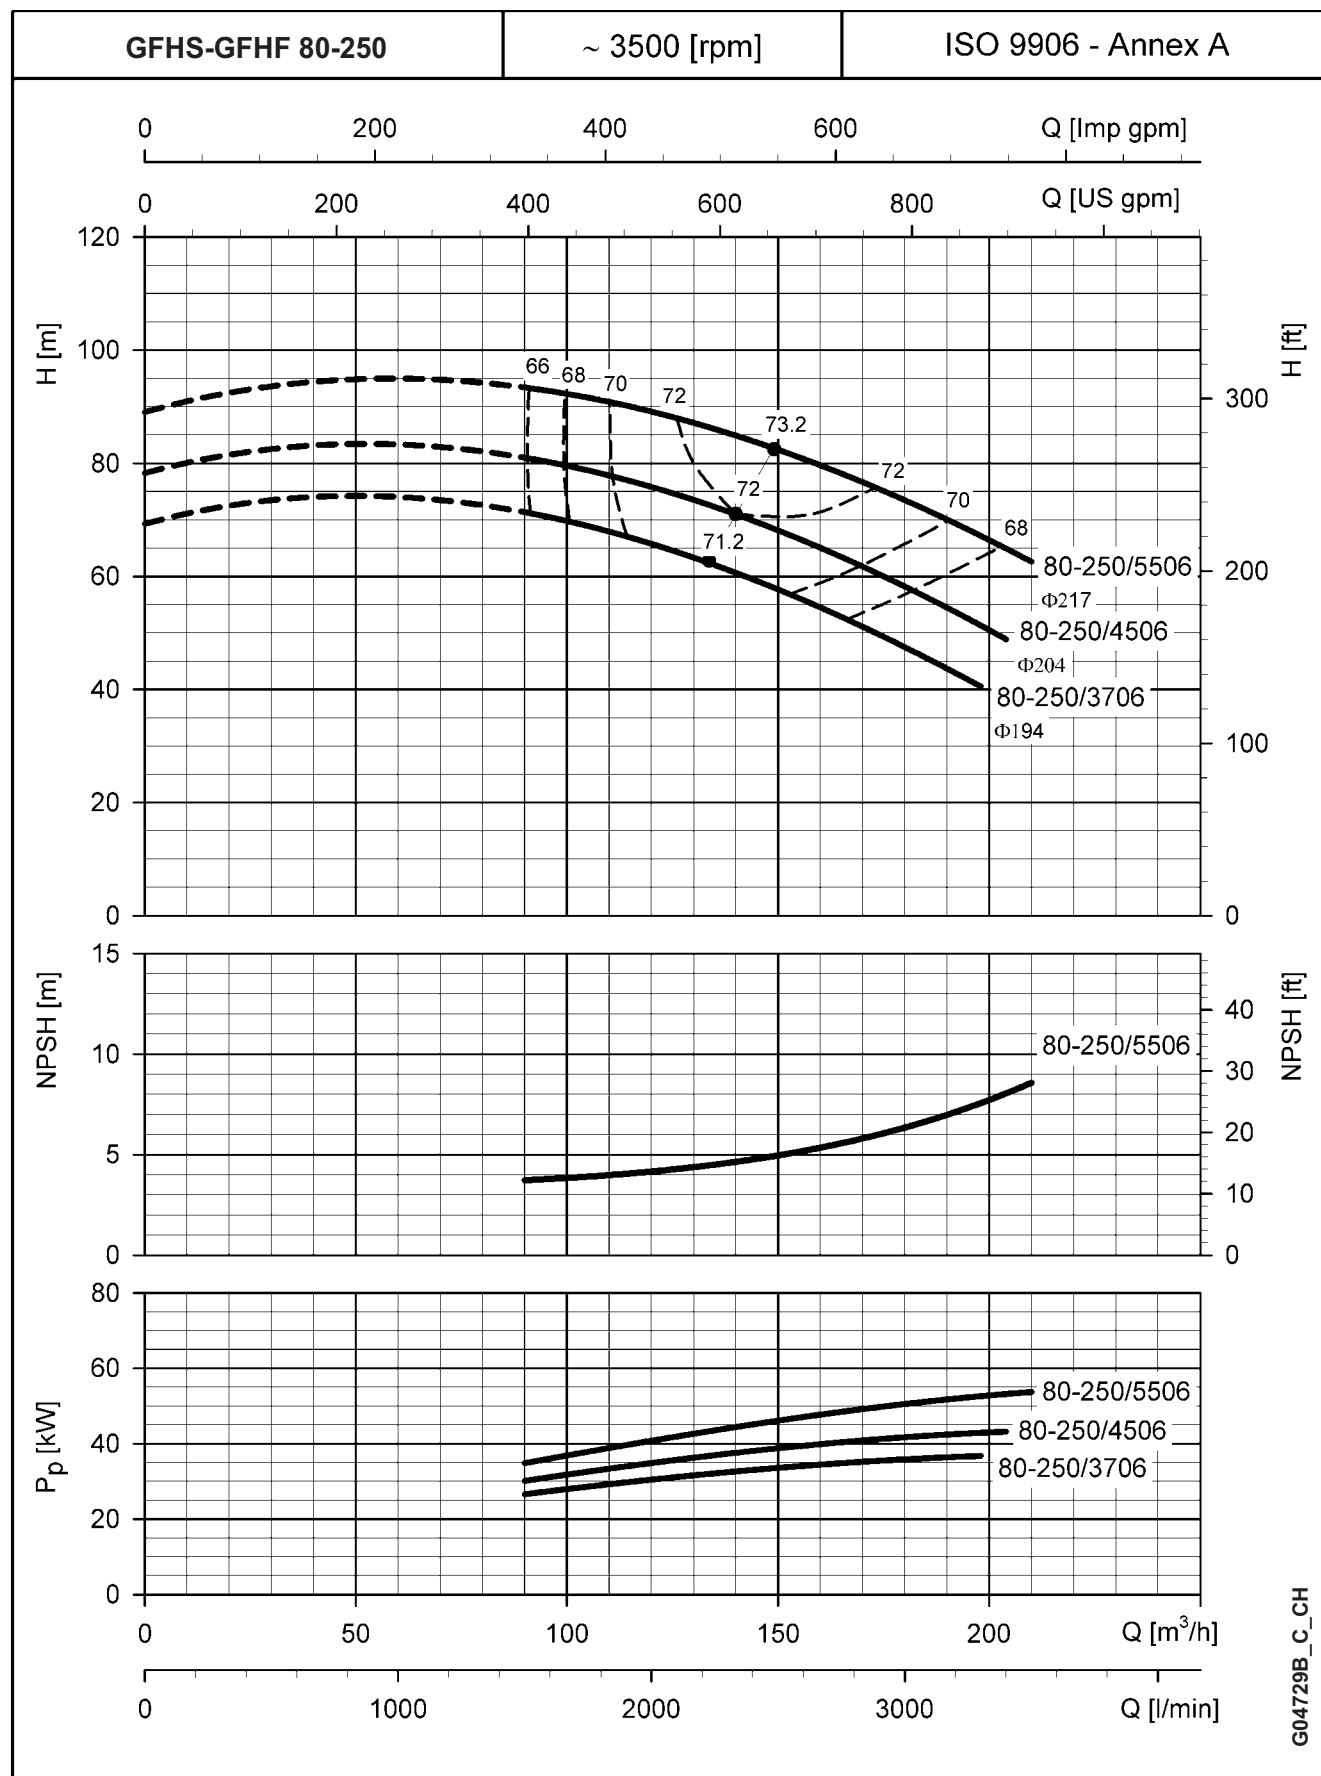


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHS-GFHF SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 2 POLES**

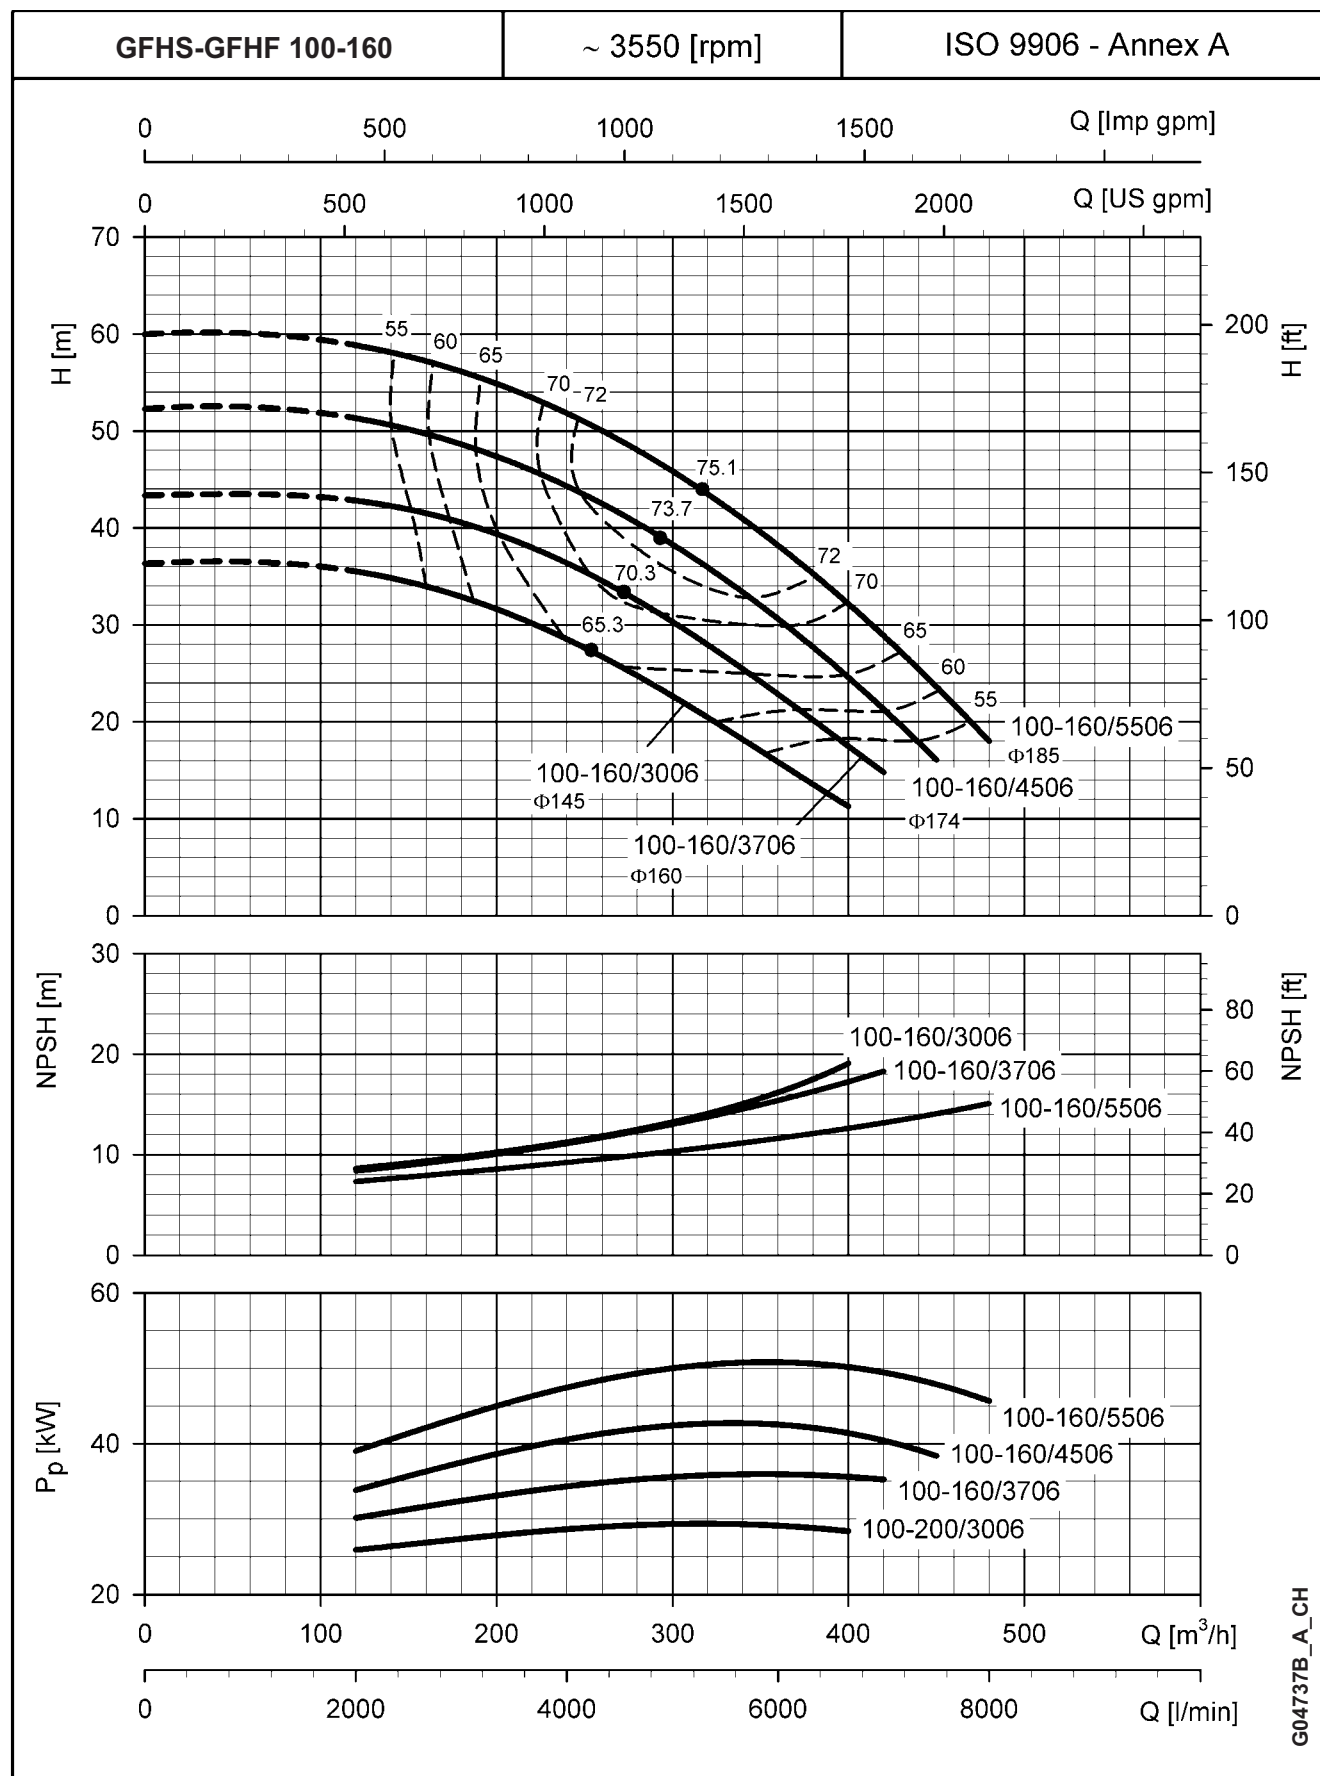


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHS-GFHF SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 2 POLES**

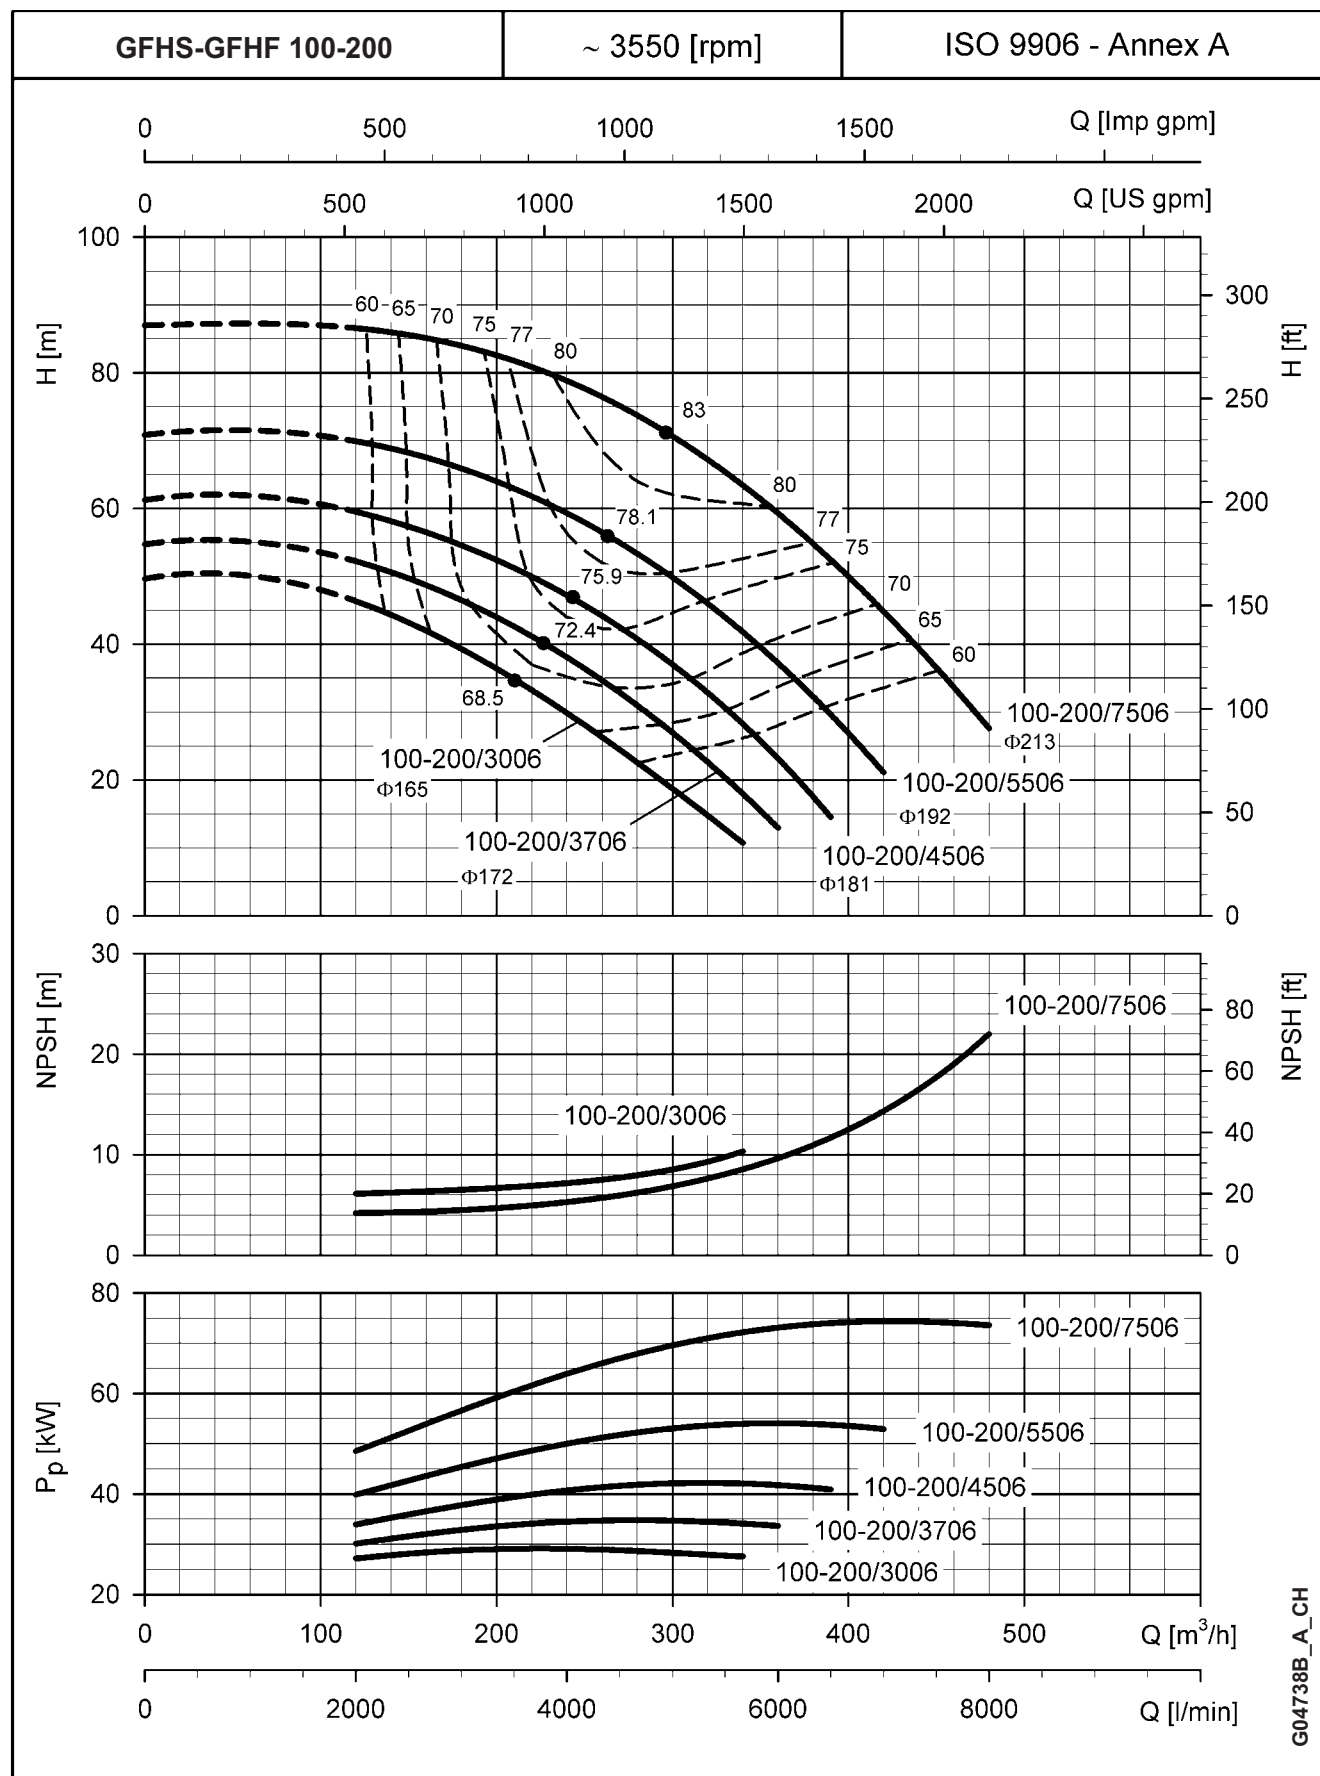


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHF SERIES OPERATING CHARACTERISTICS AT 60 Hz, 2 POLES

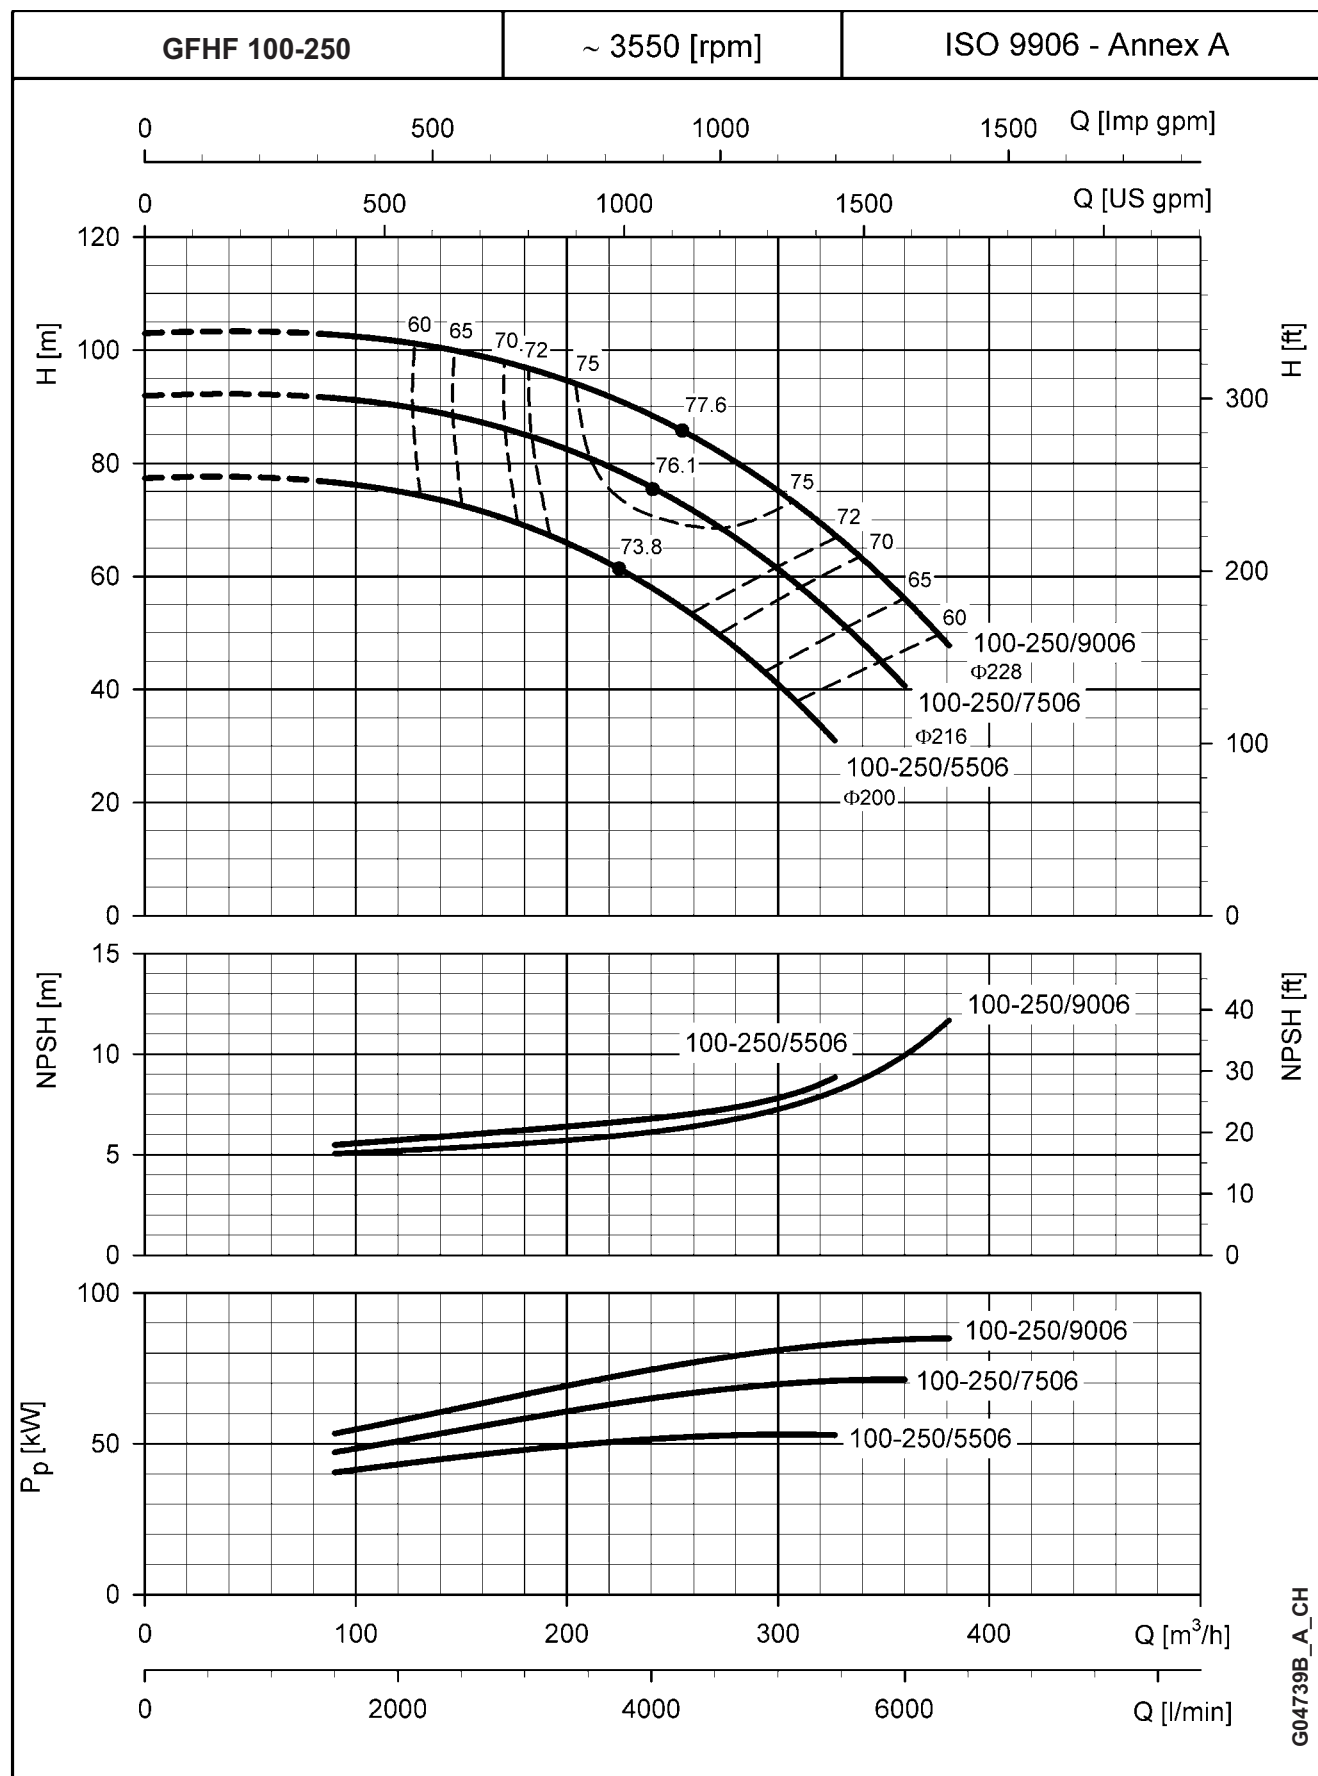


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE4-GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

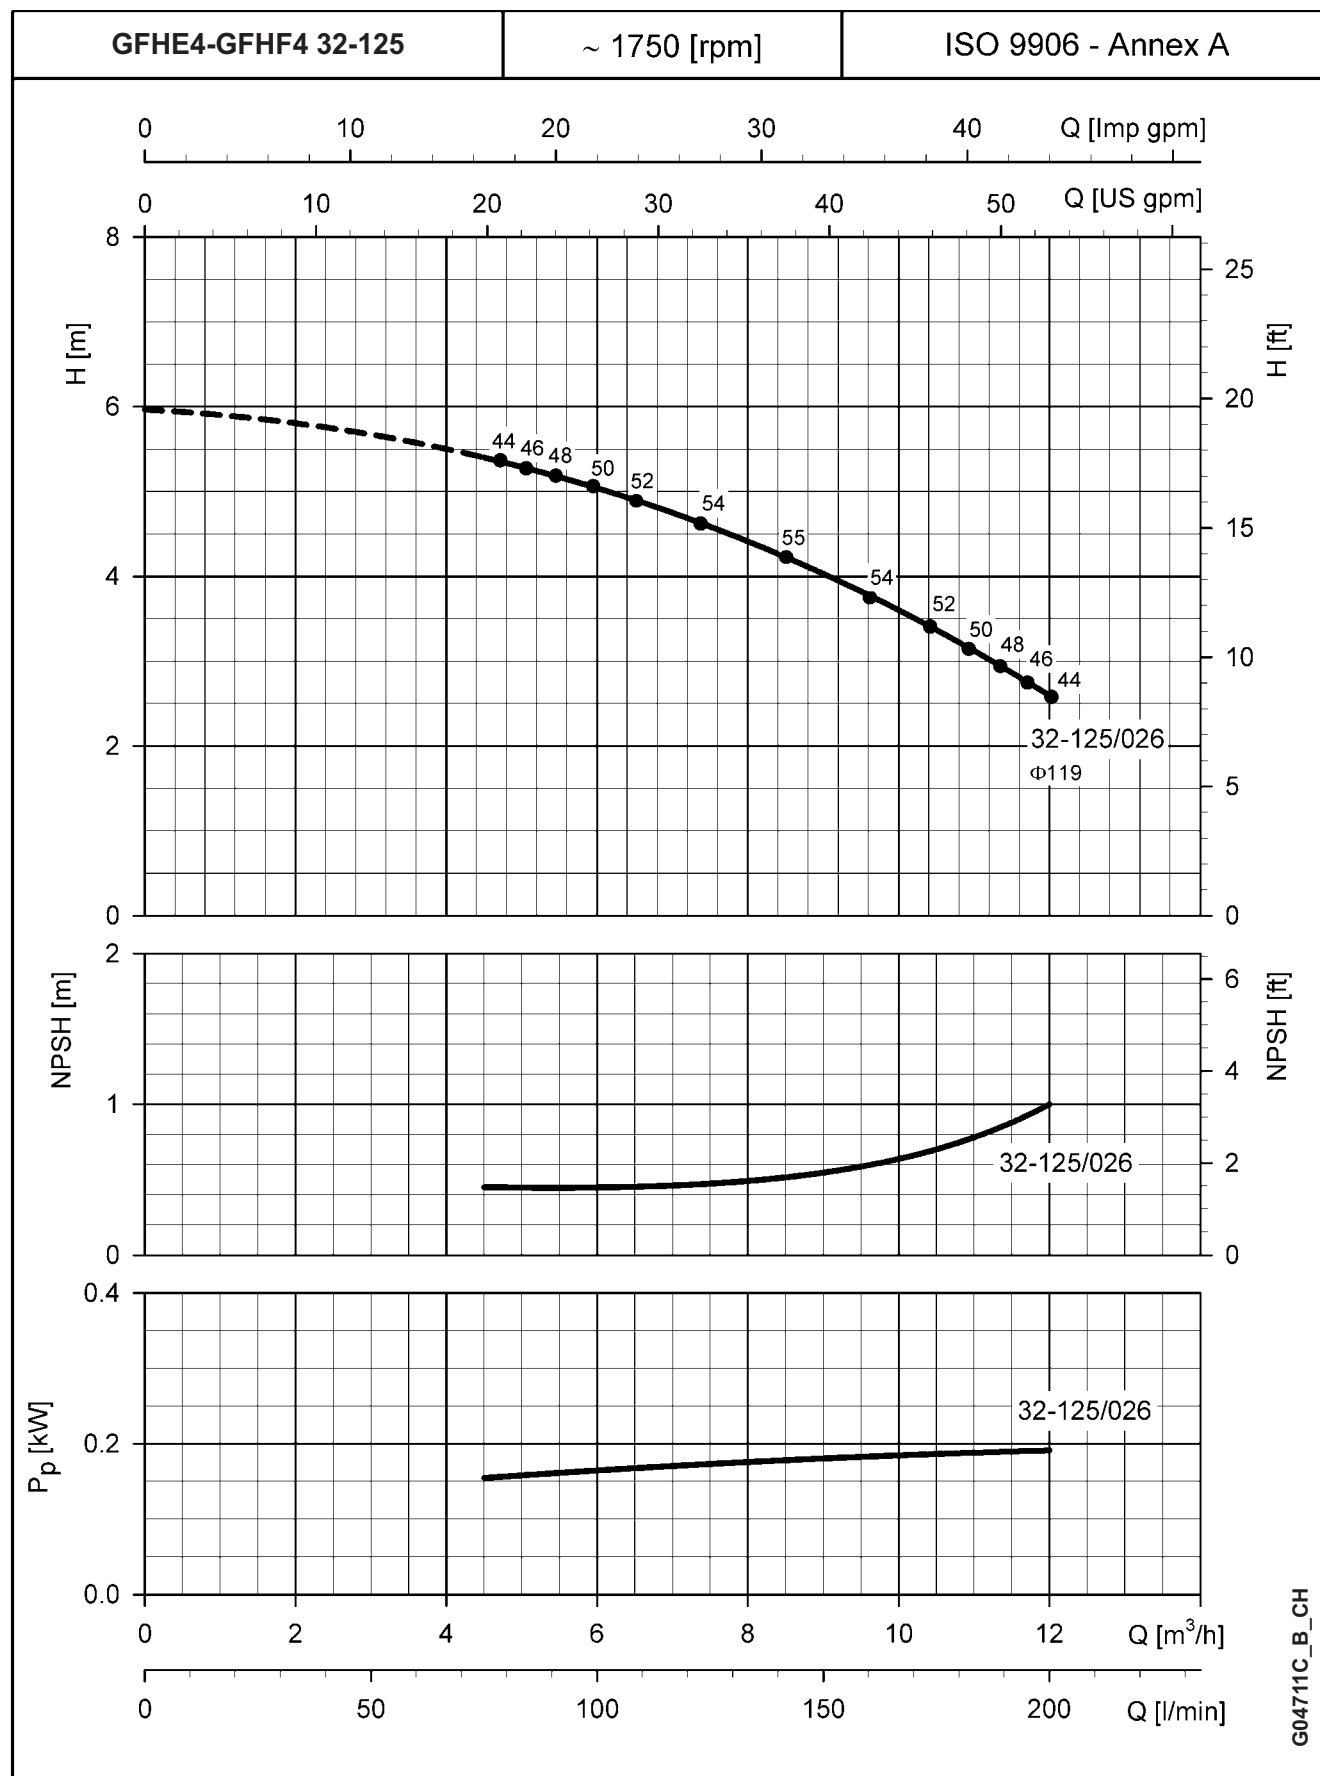


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE4-GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

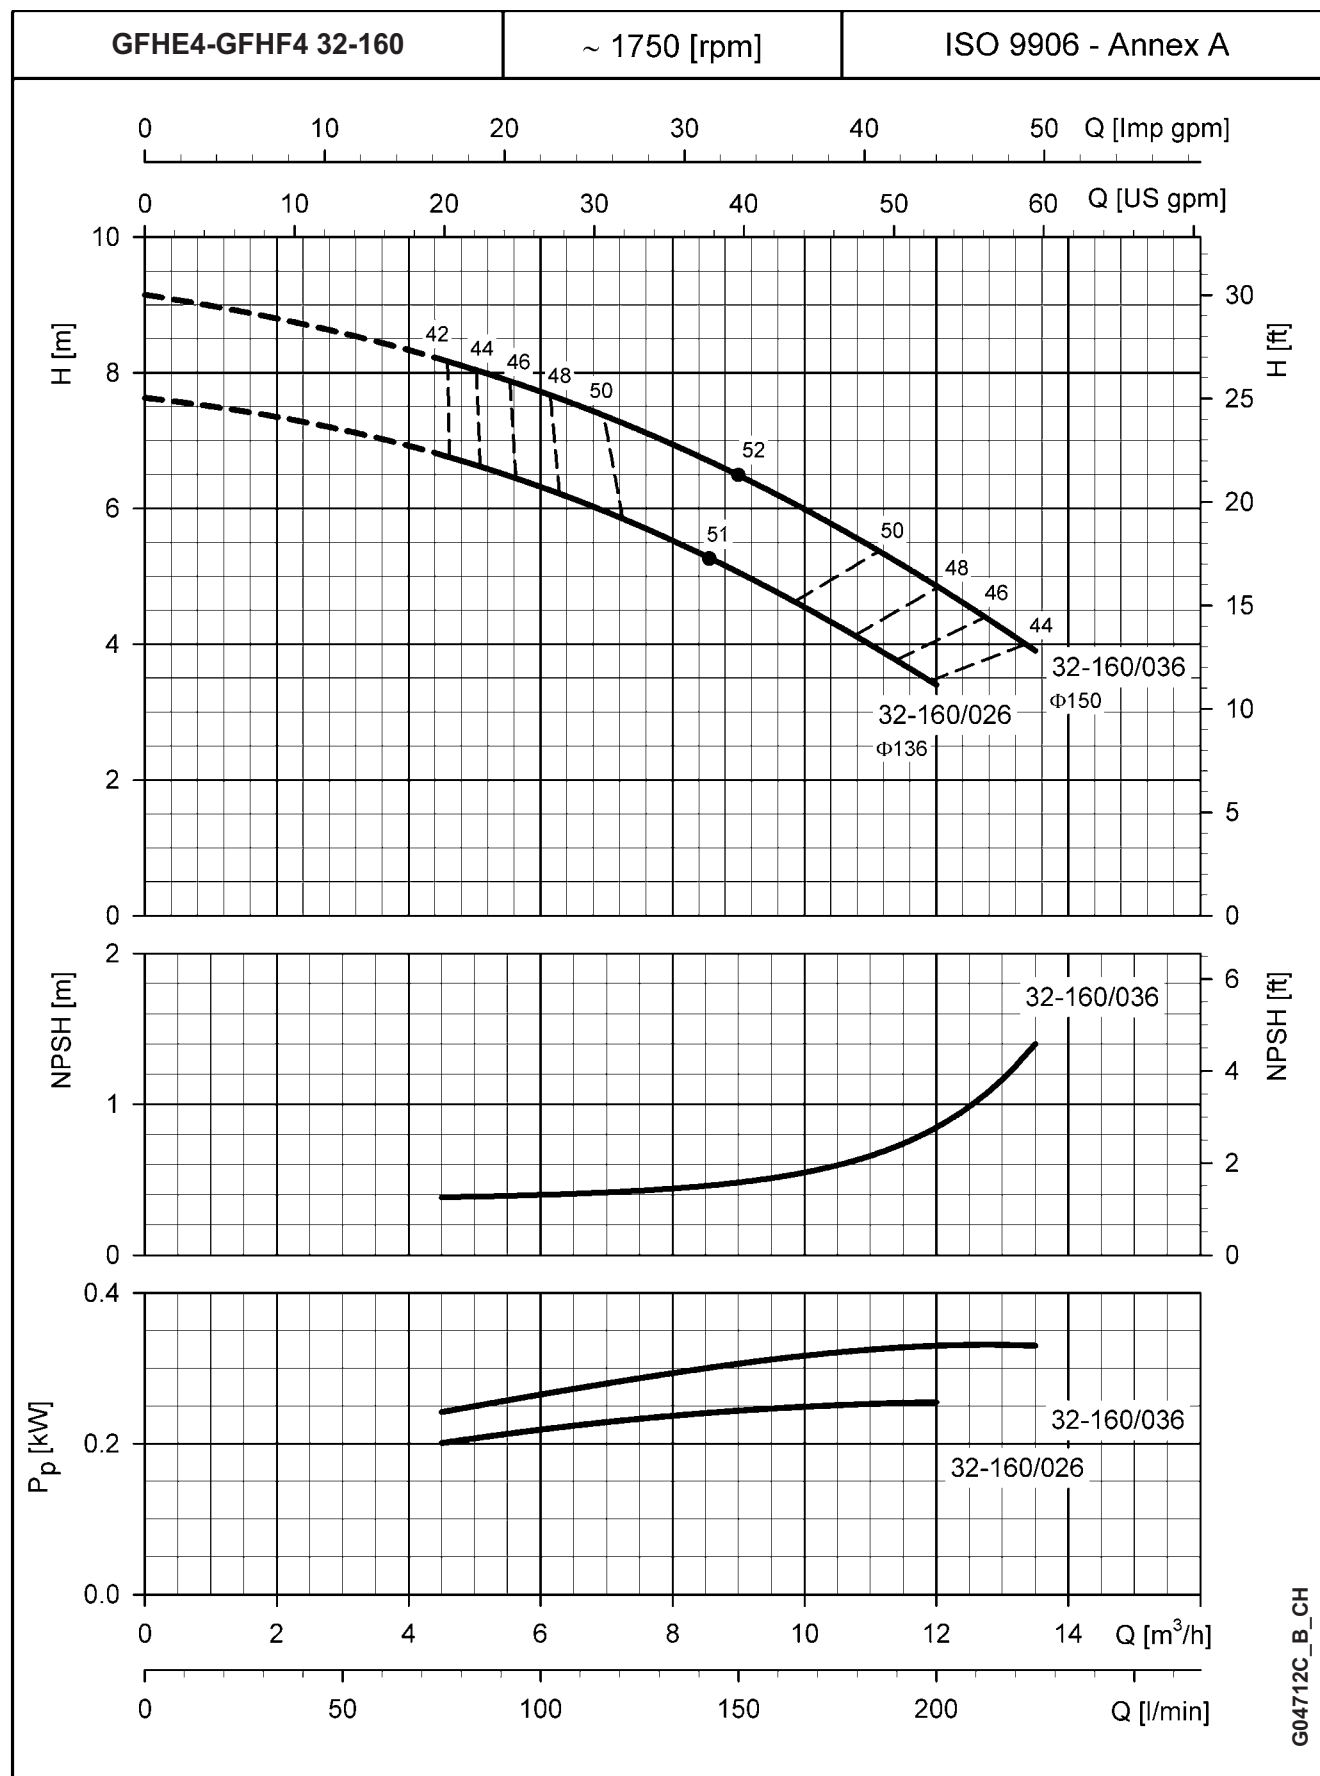


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE4-GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

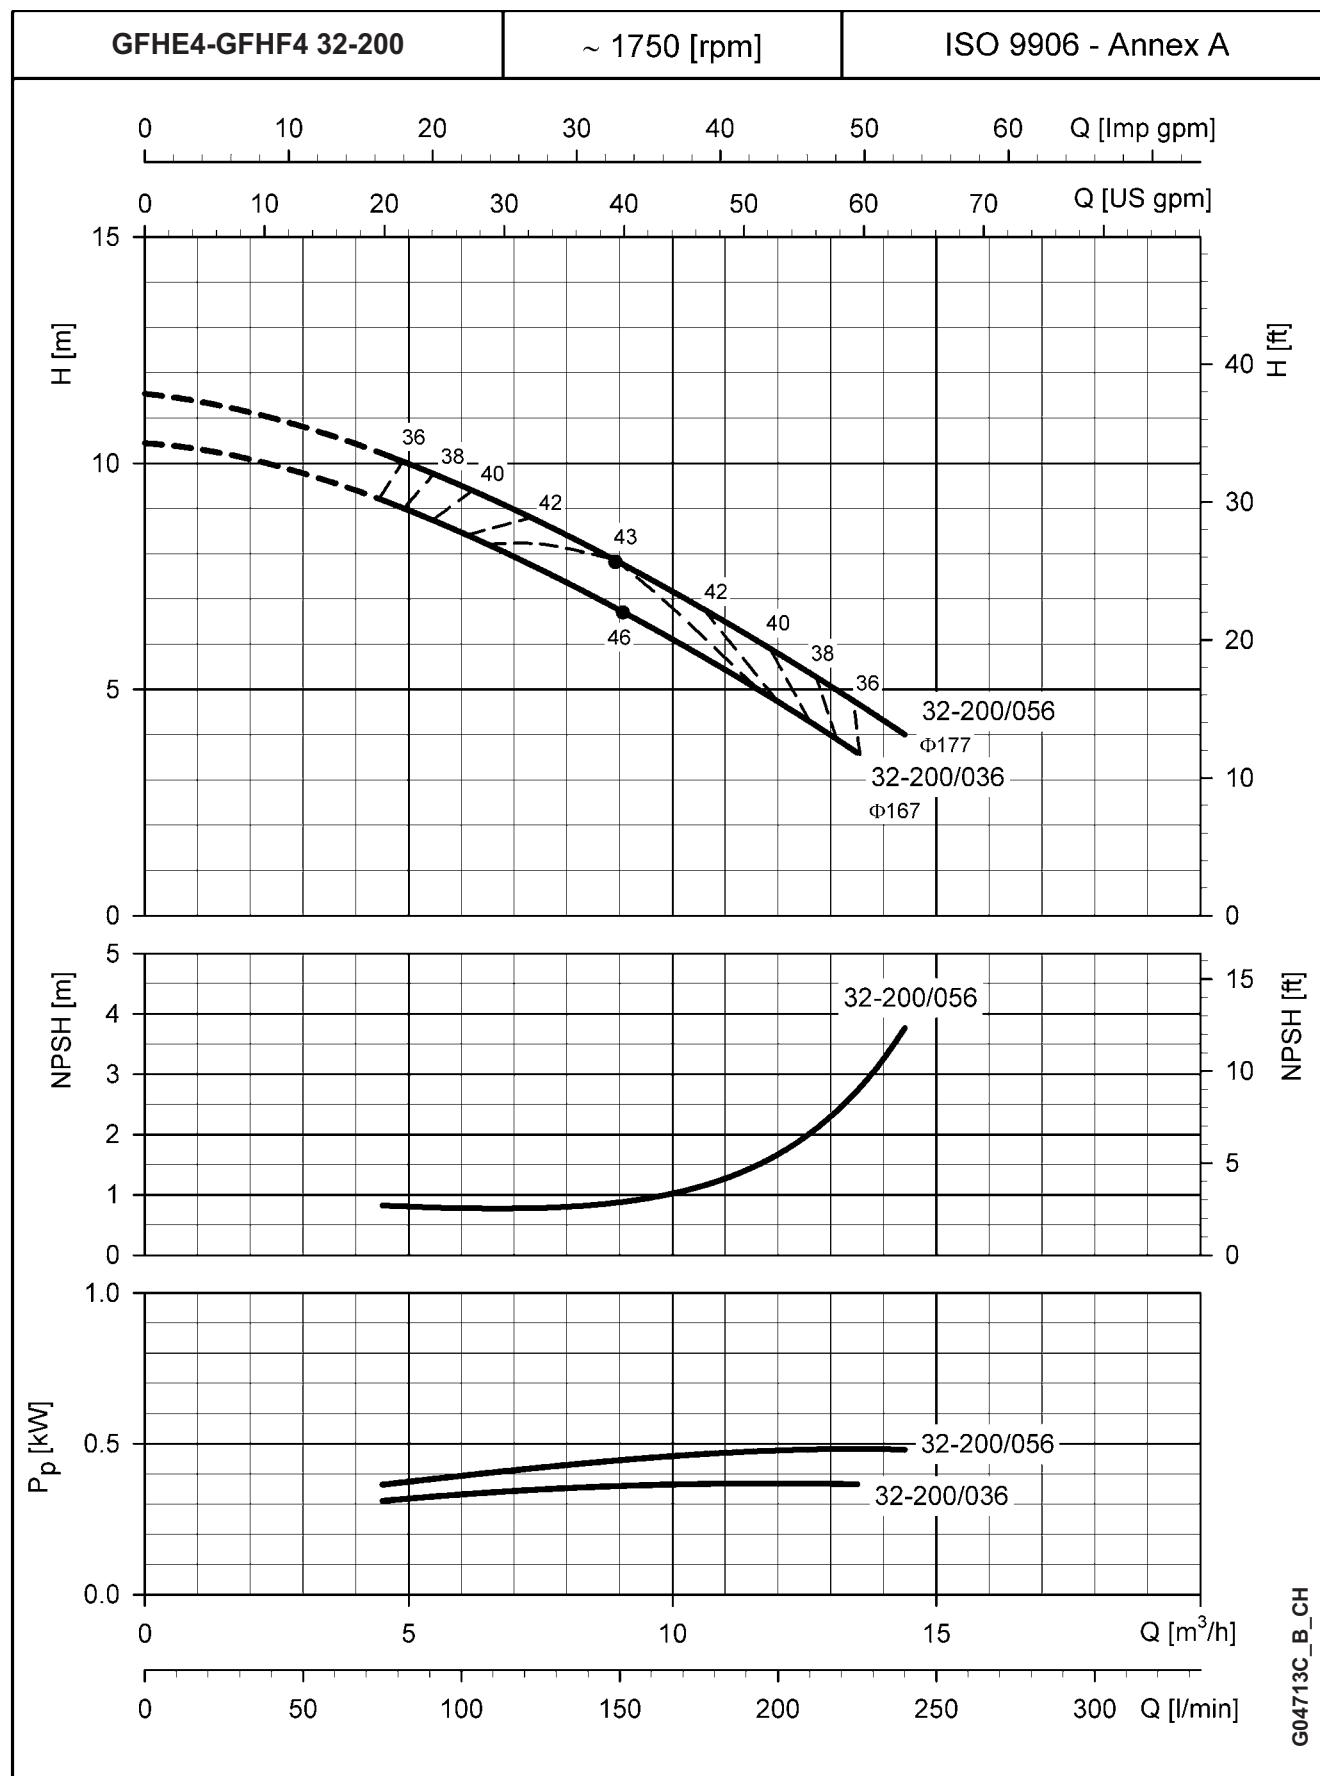


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

2GFHE4 SERIES OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES

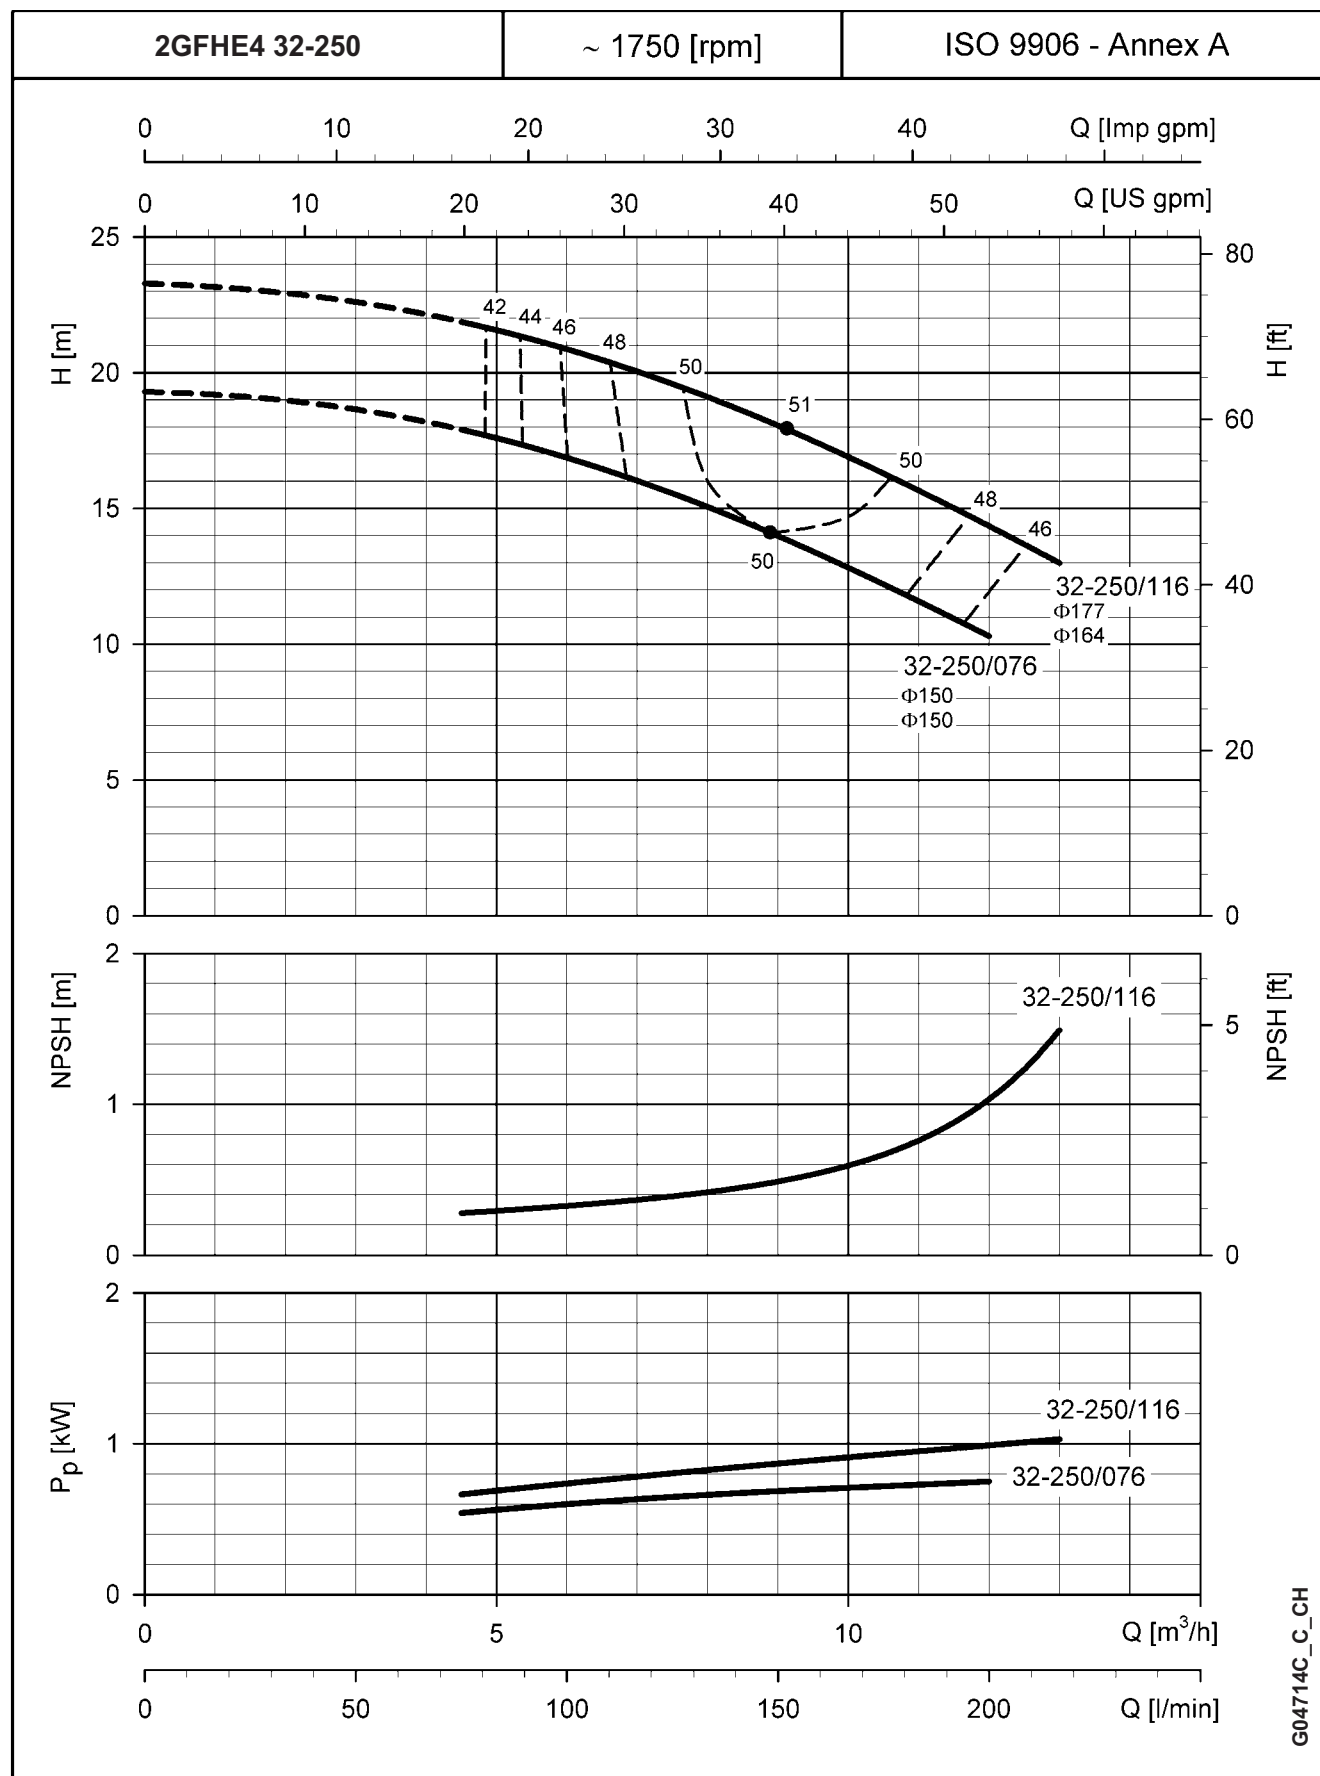


The NPSH values are laboratory values: for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE4-GFHF4 SERIES OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES

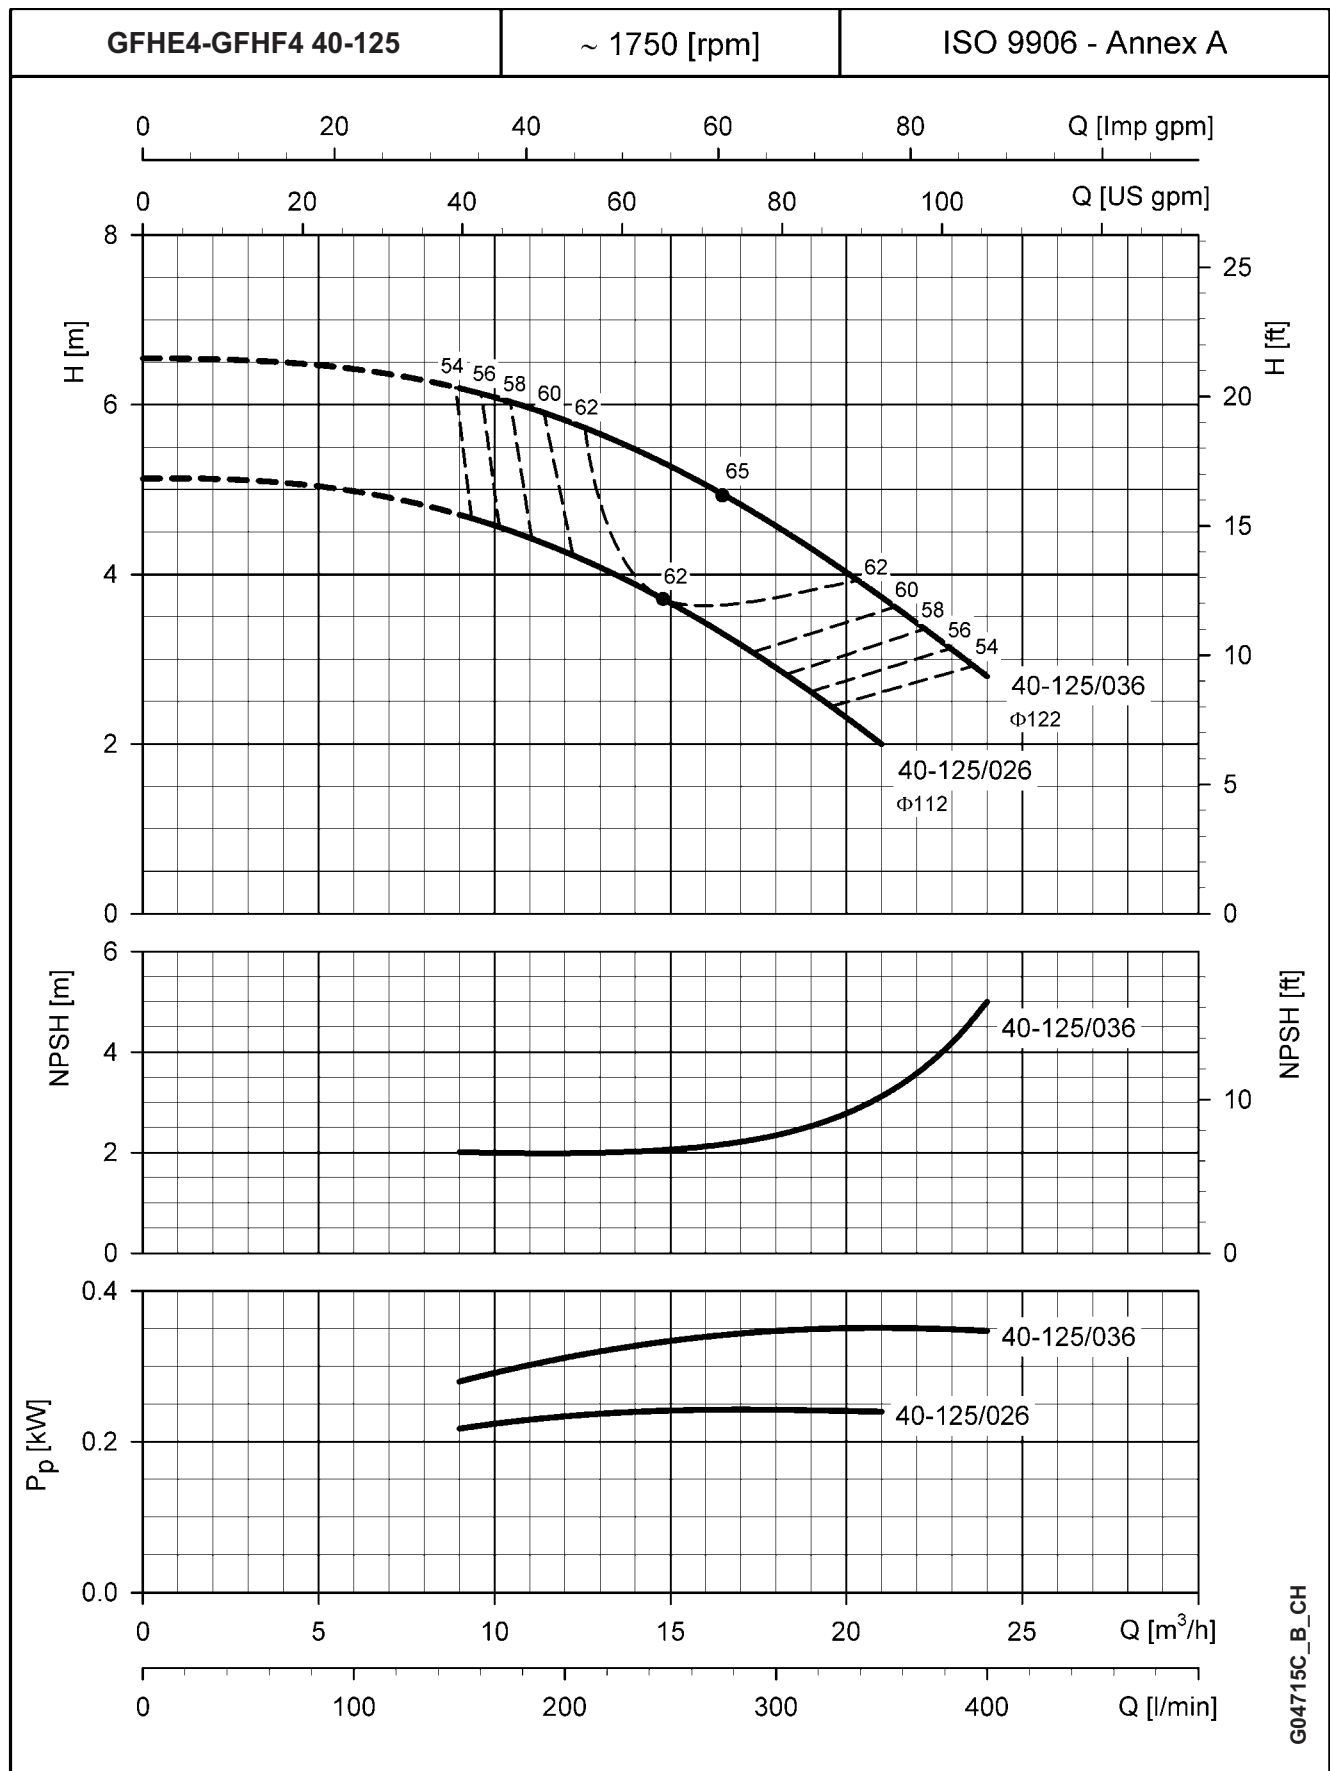


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE4-GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

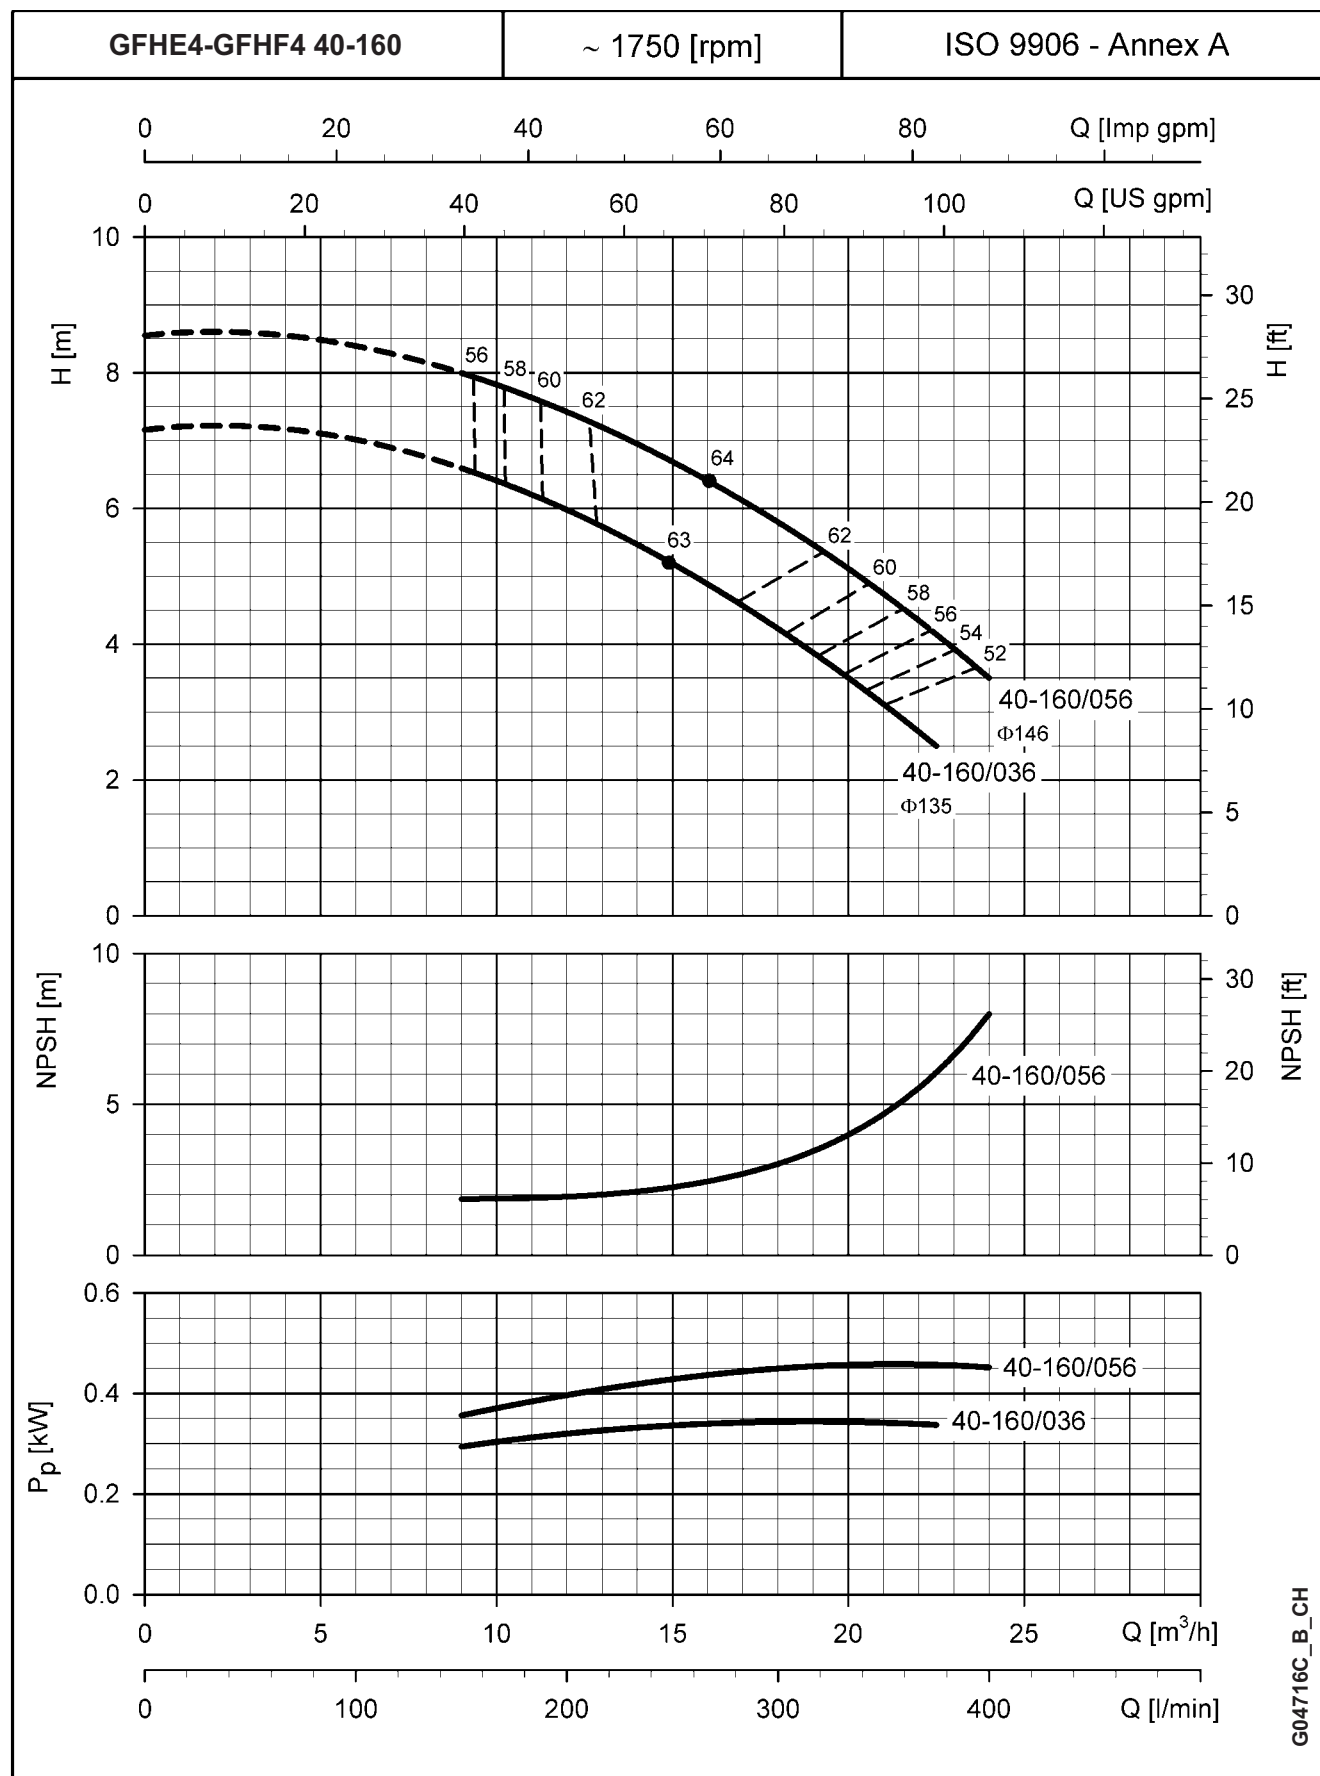


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE4-GFHS4-GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

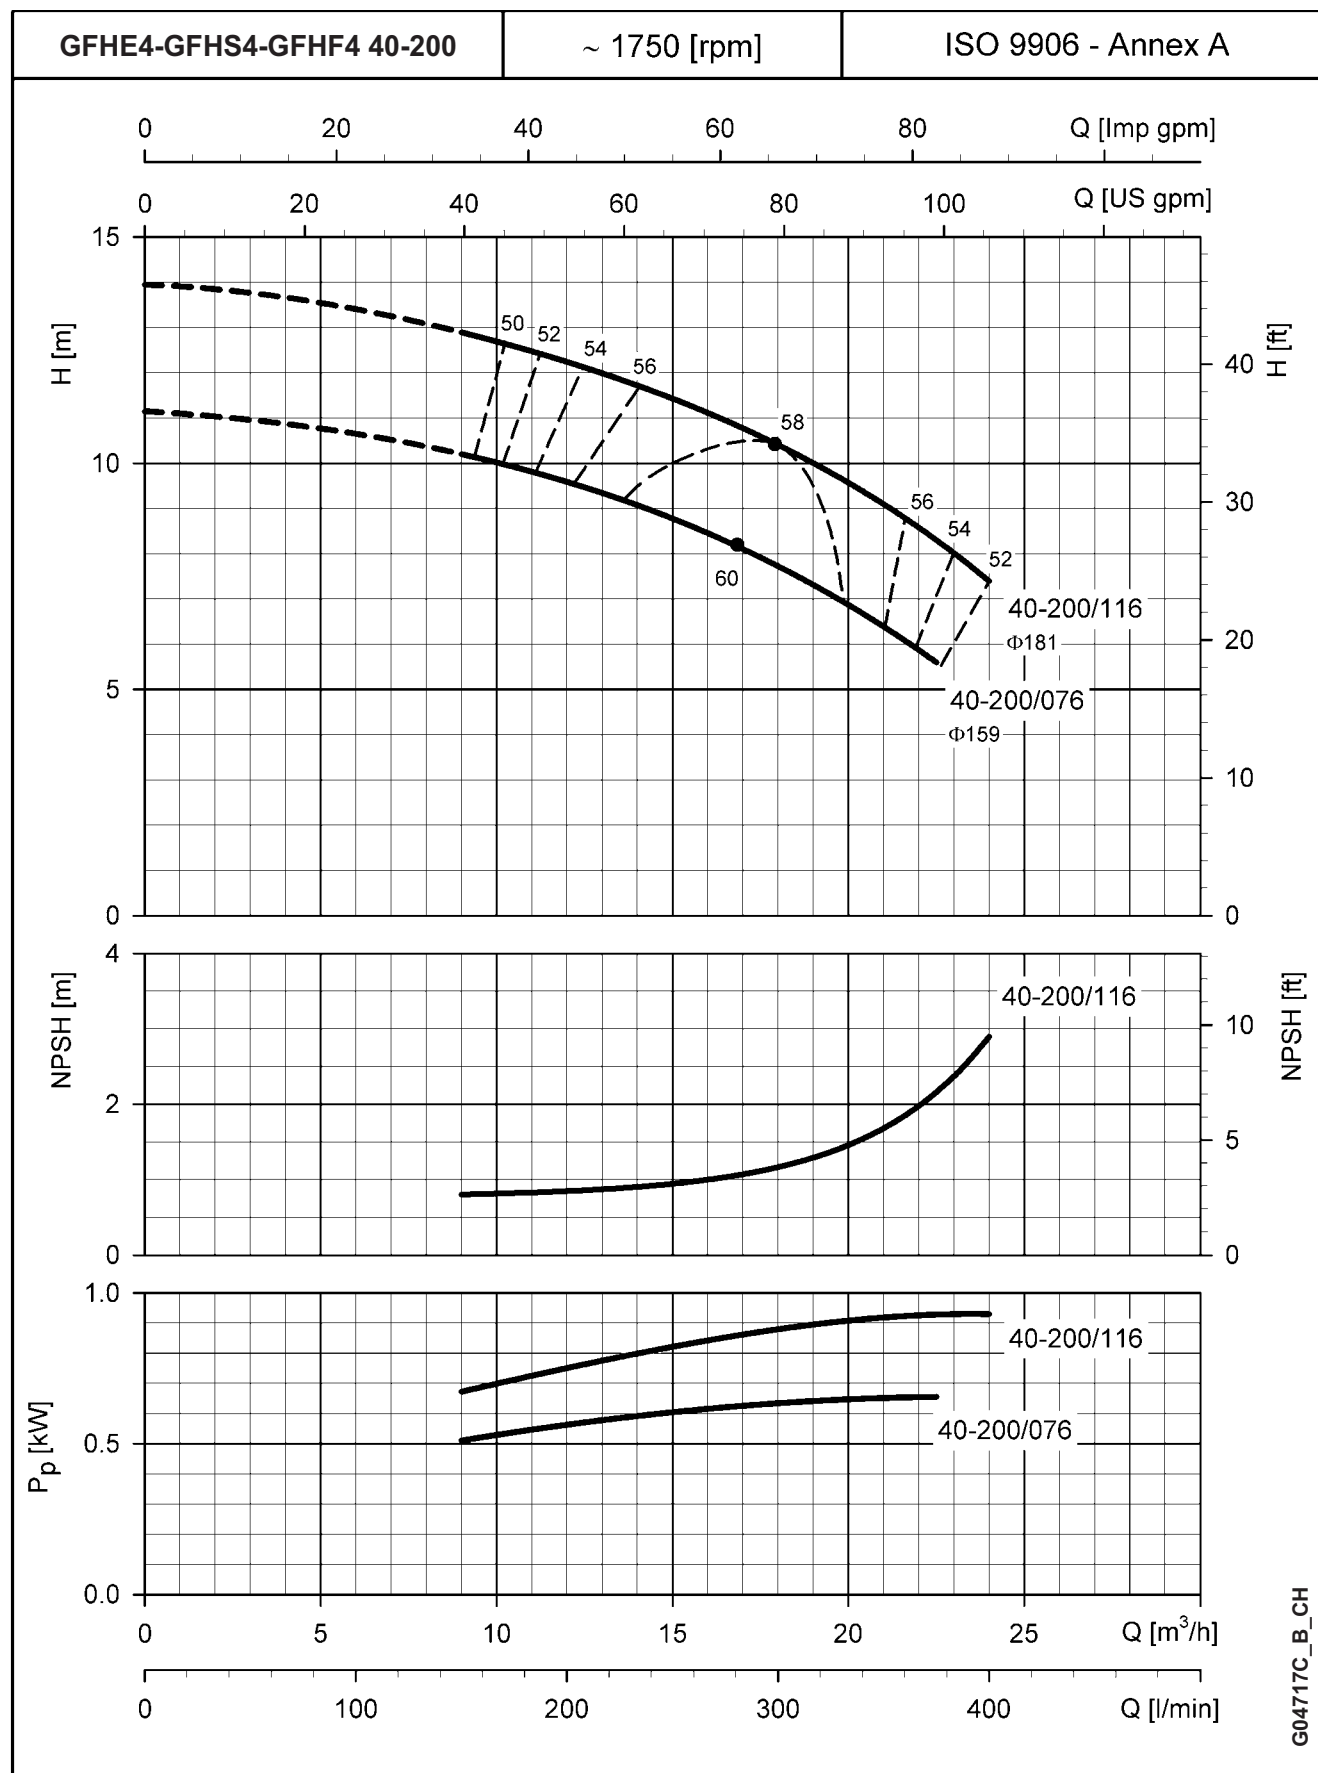


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE4-GFHS4-GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

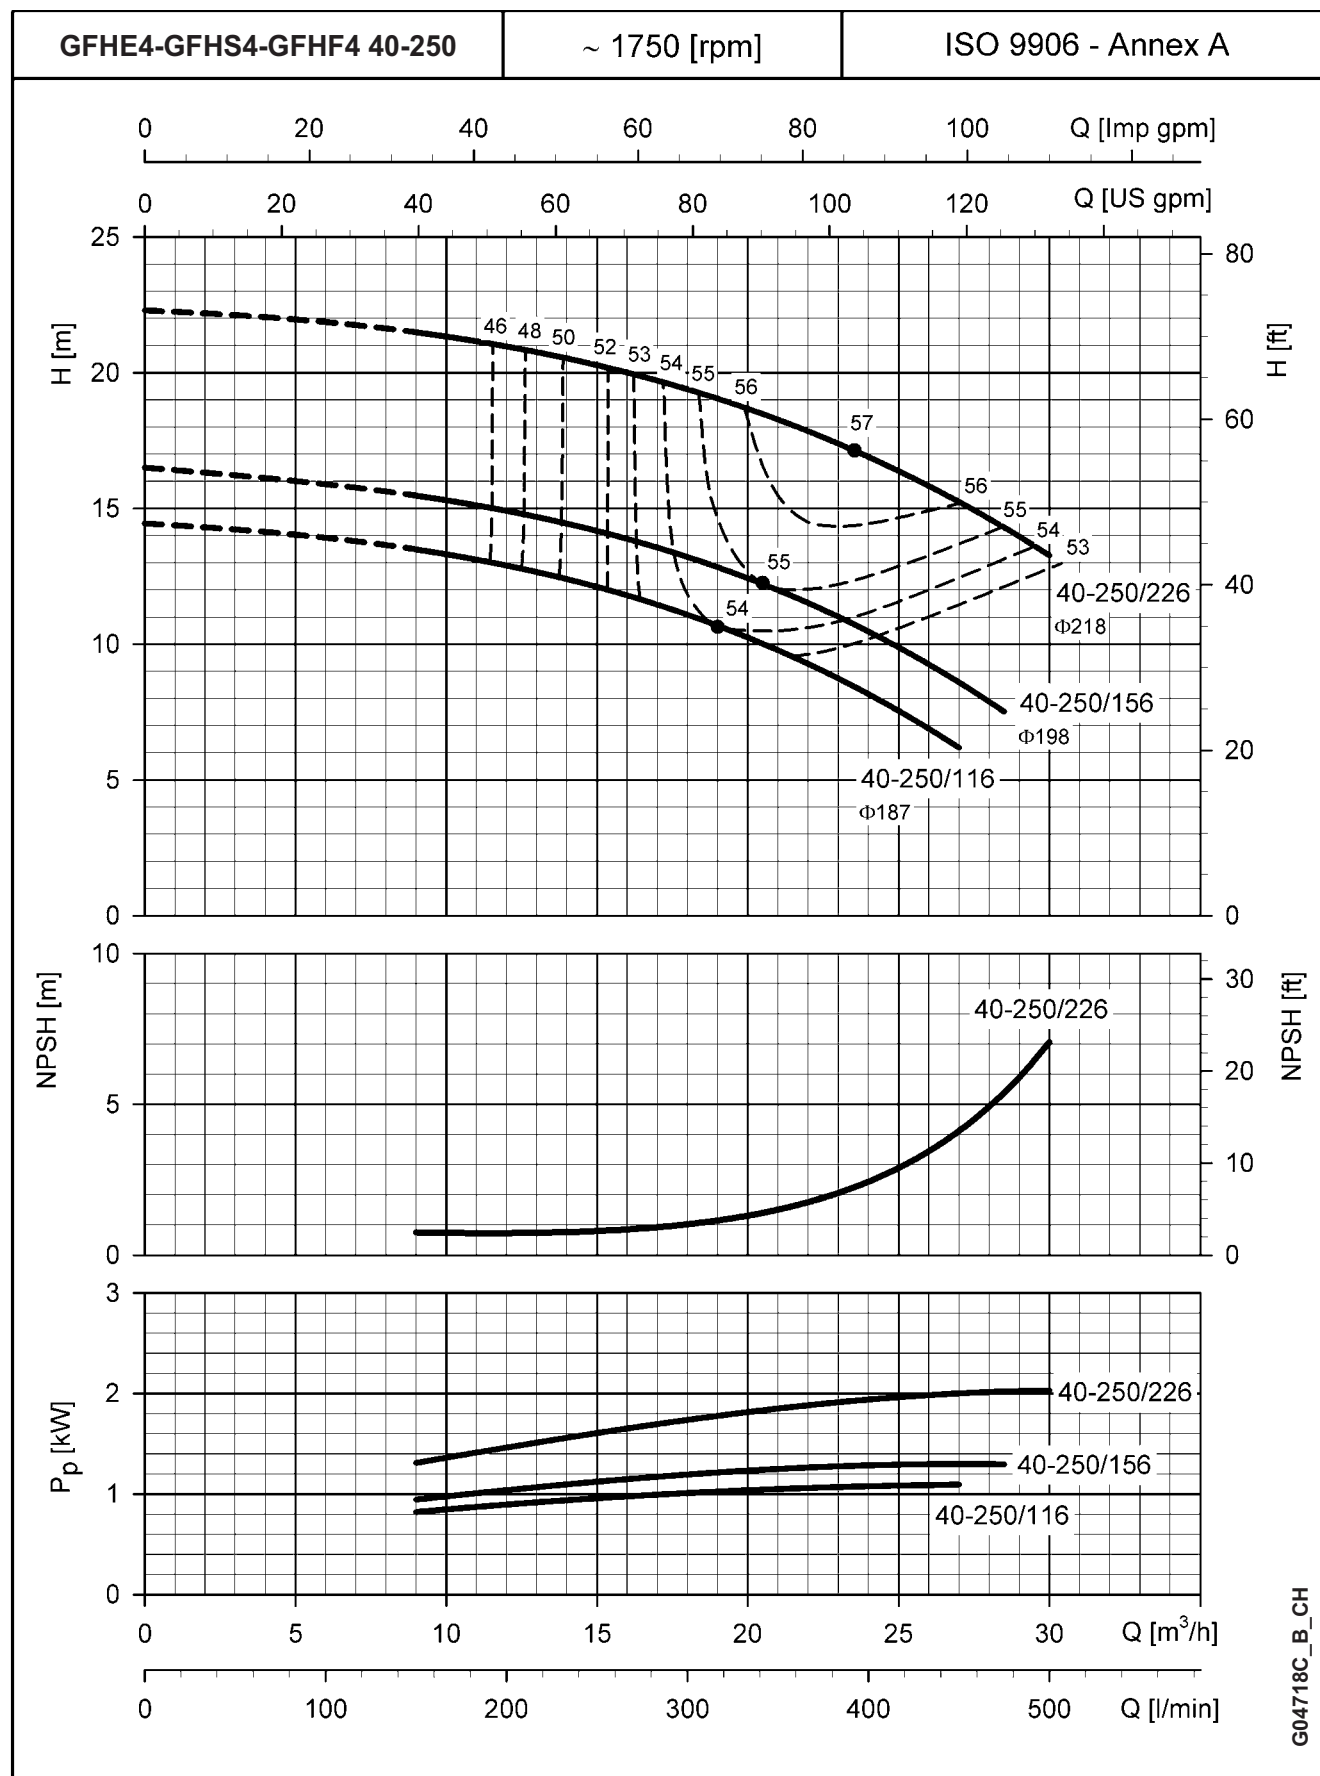


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE4-GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

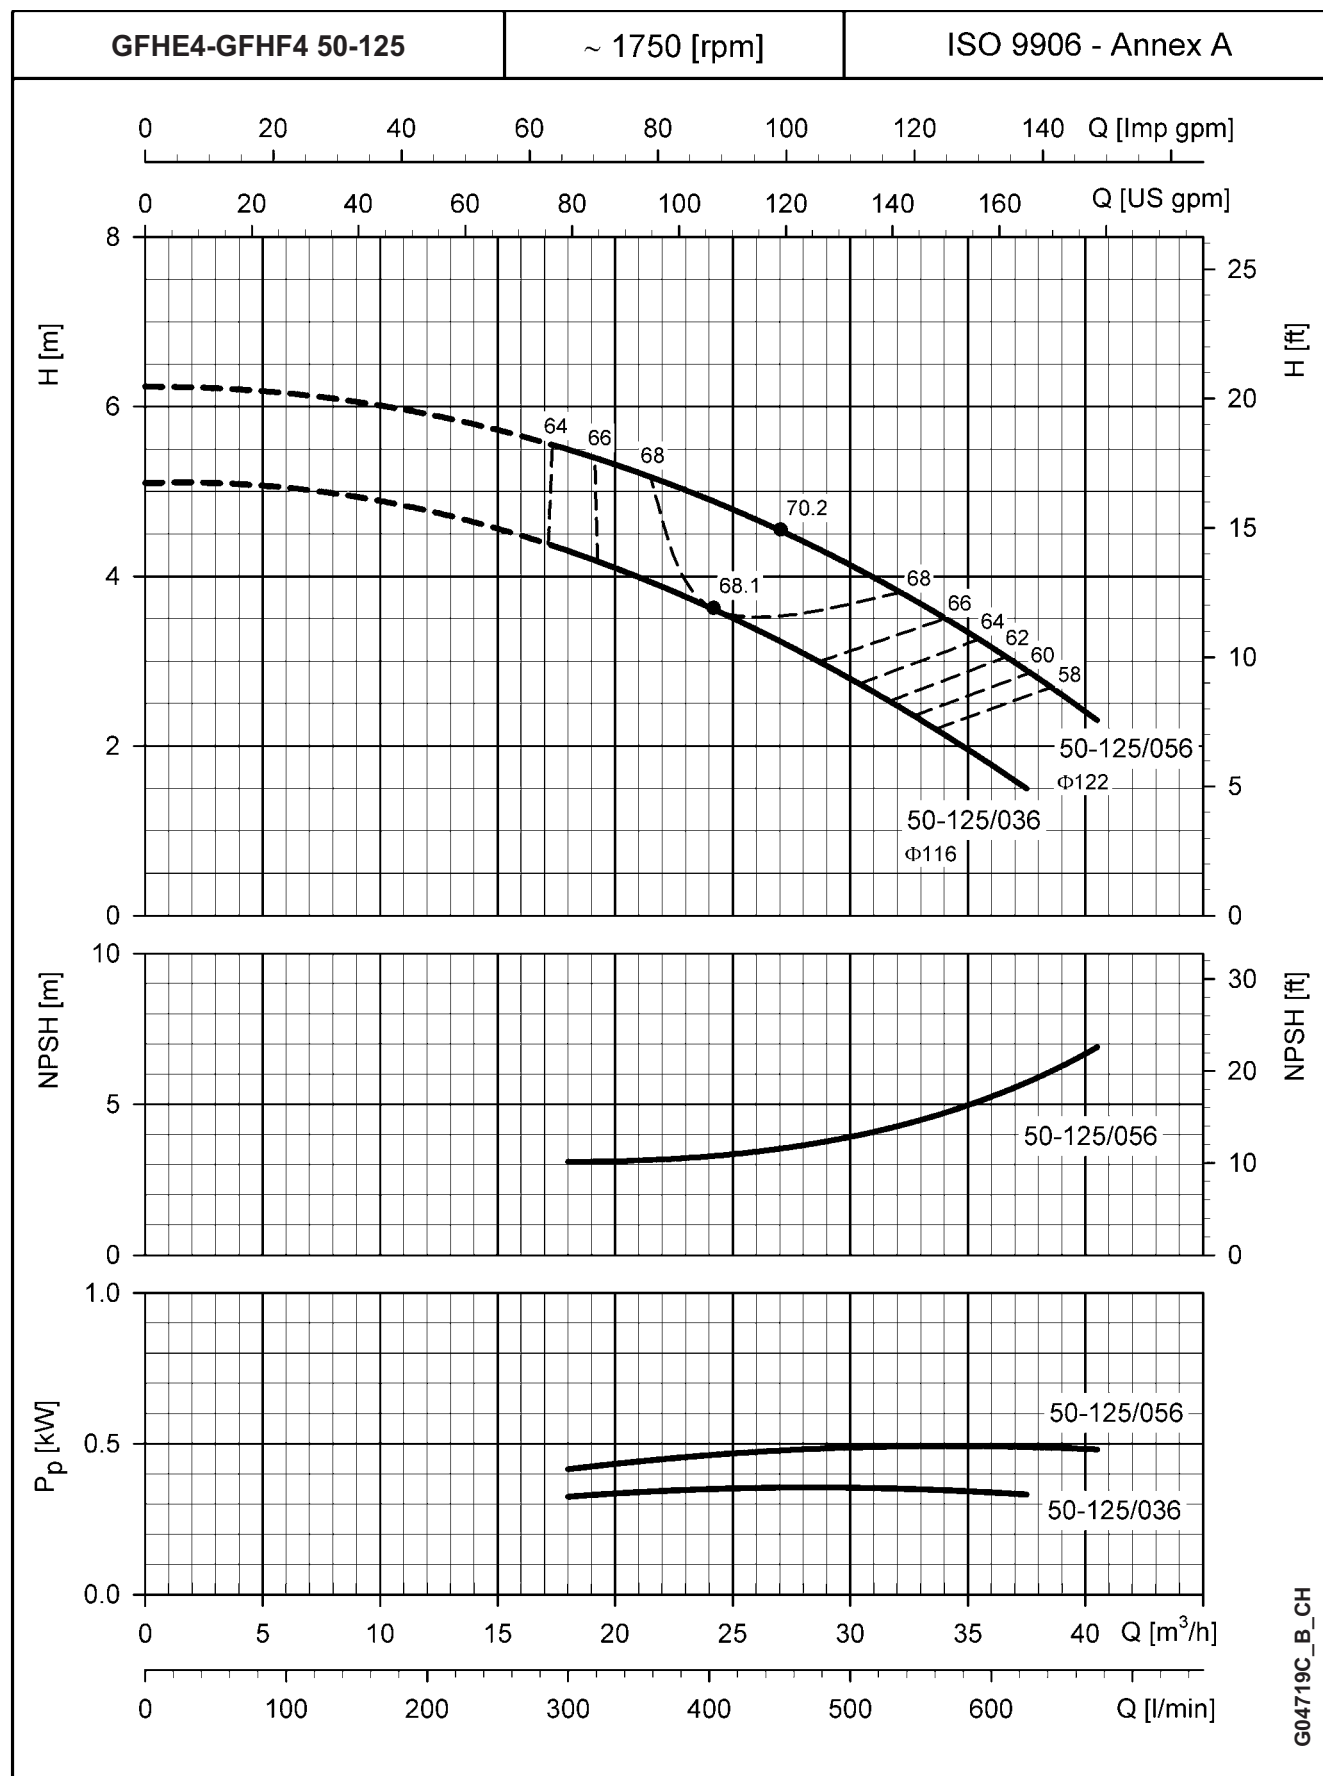

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.


GFHE4-GFHS4-GFHF4 SERIES
OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES

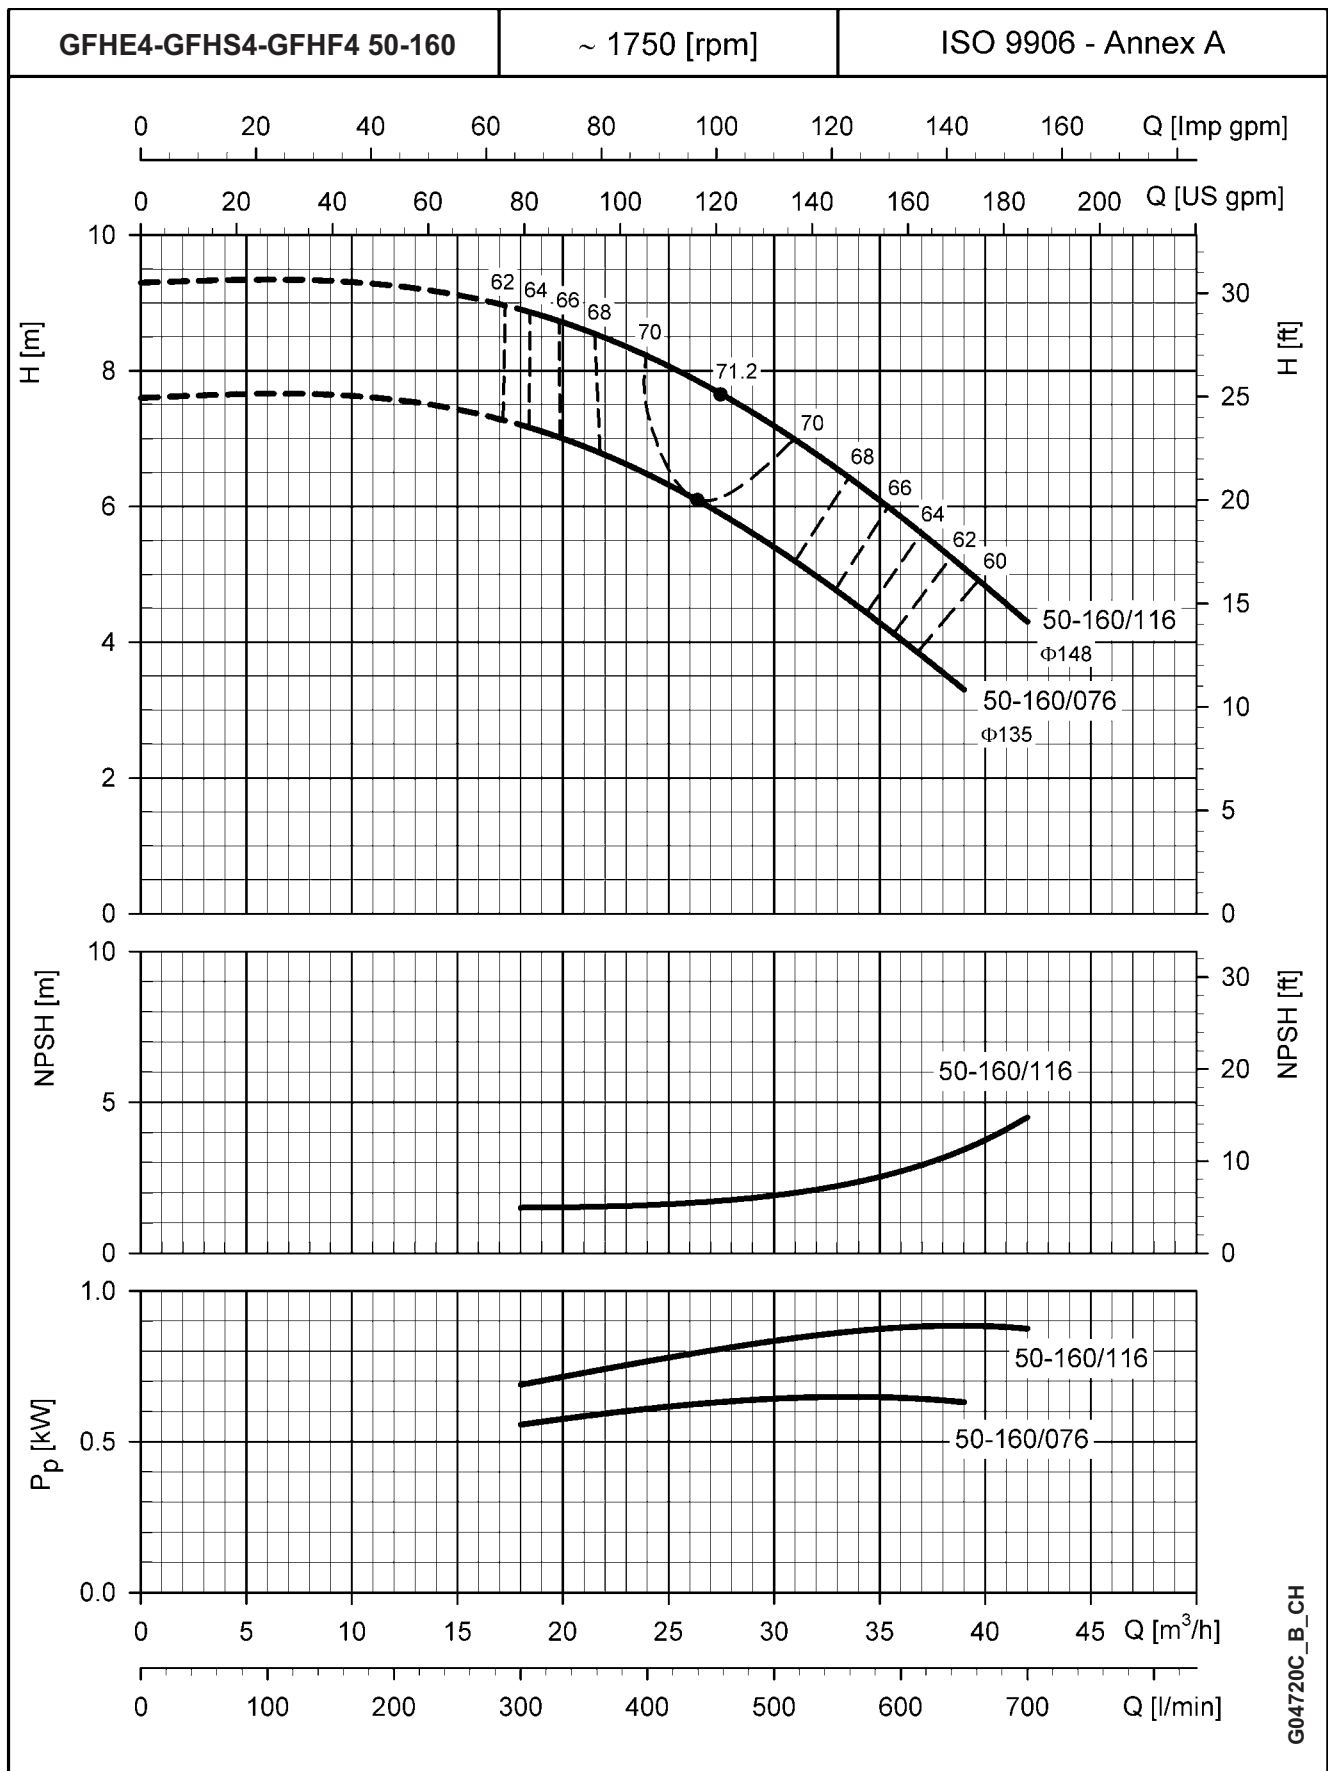

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.


GFHE4-GFHS4-GFHF4 SERIES

OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES

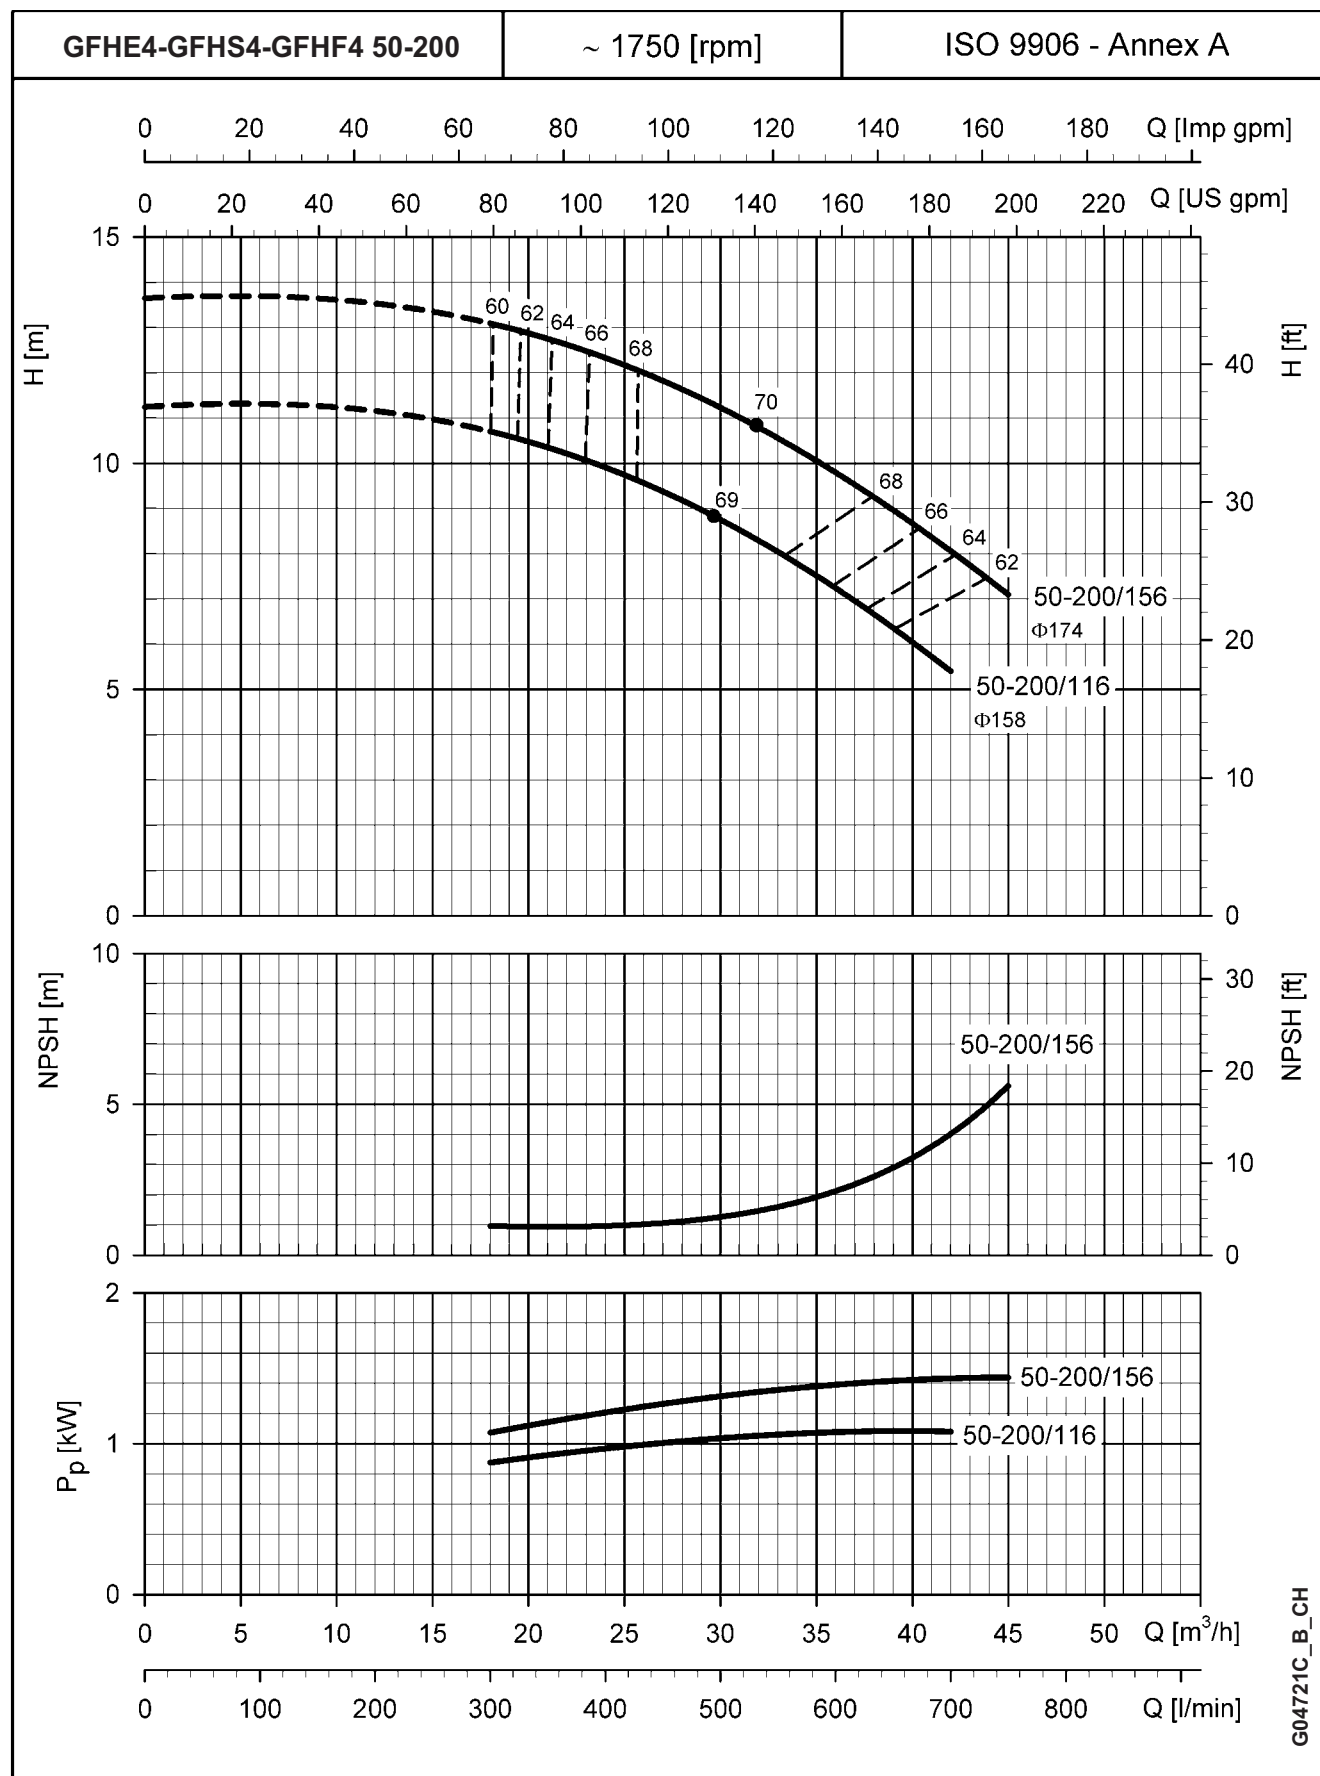


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE4-GFHS4-GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

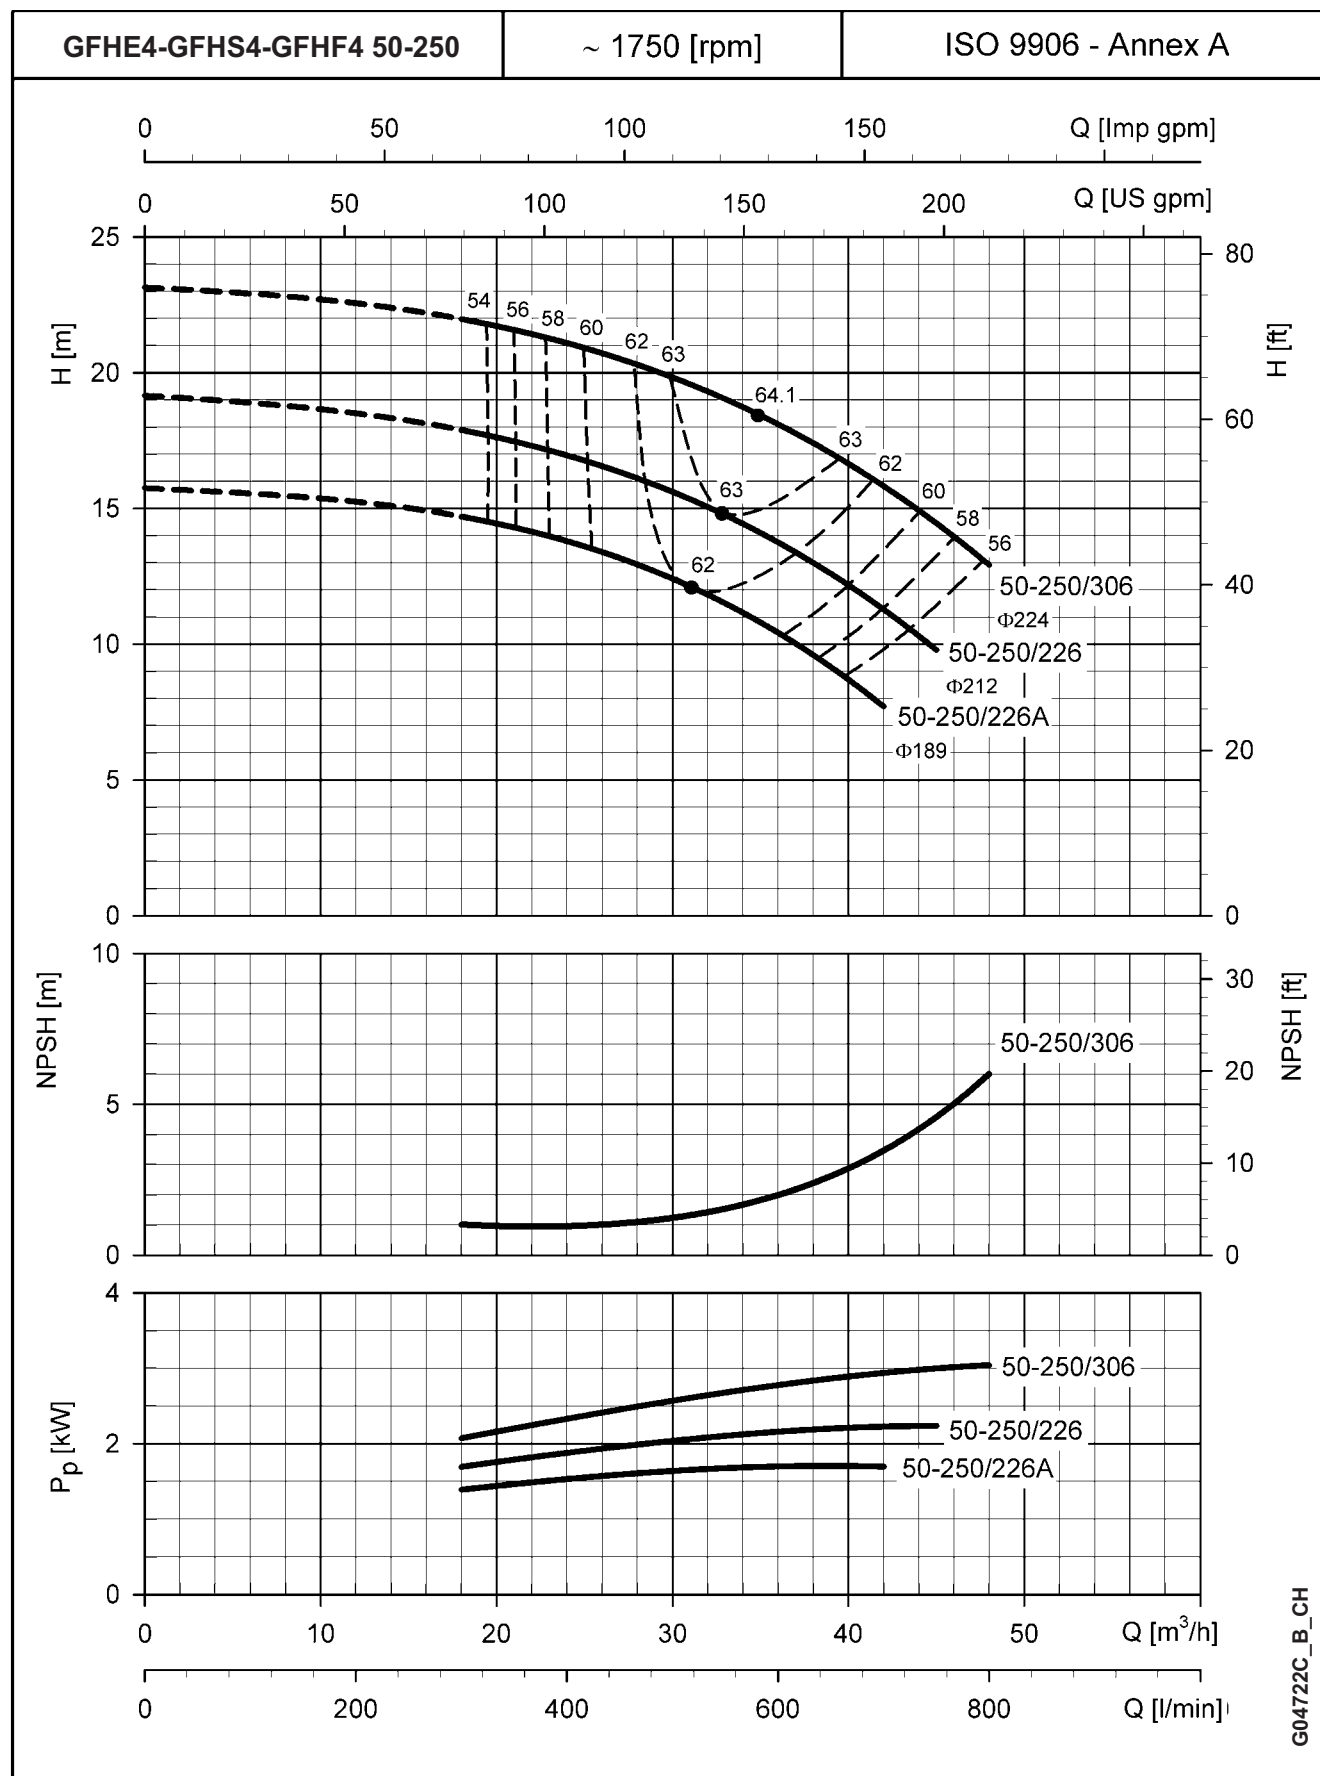


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE4-GFHS4-GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

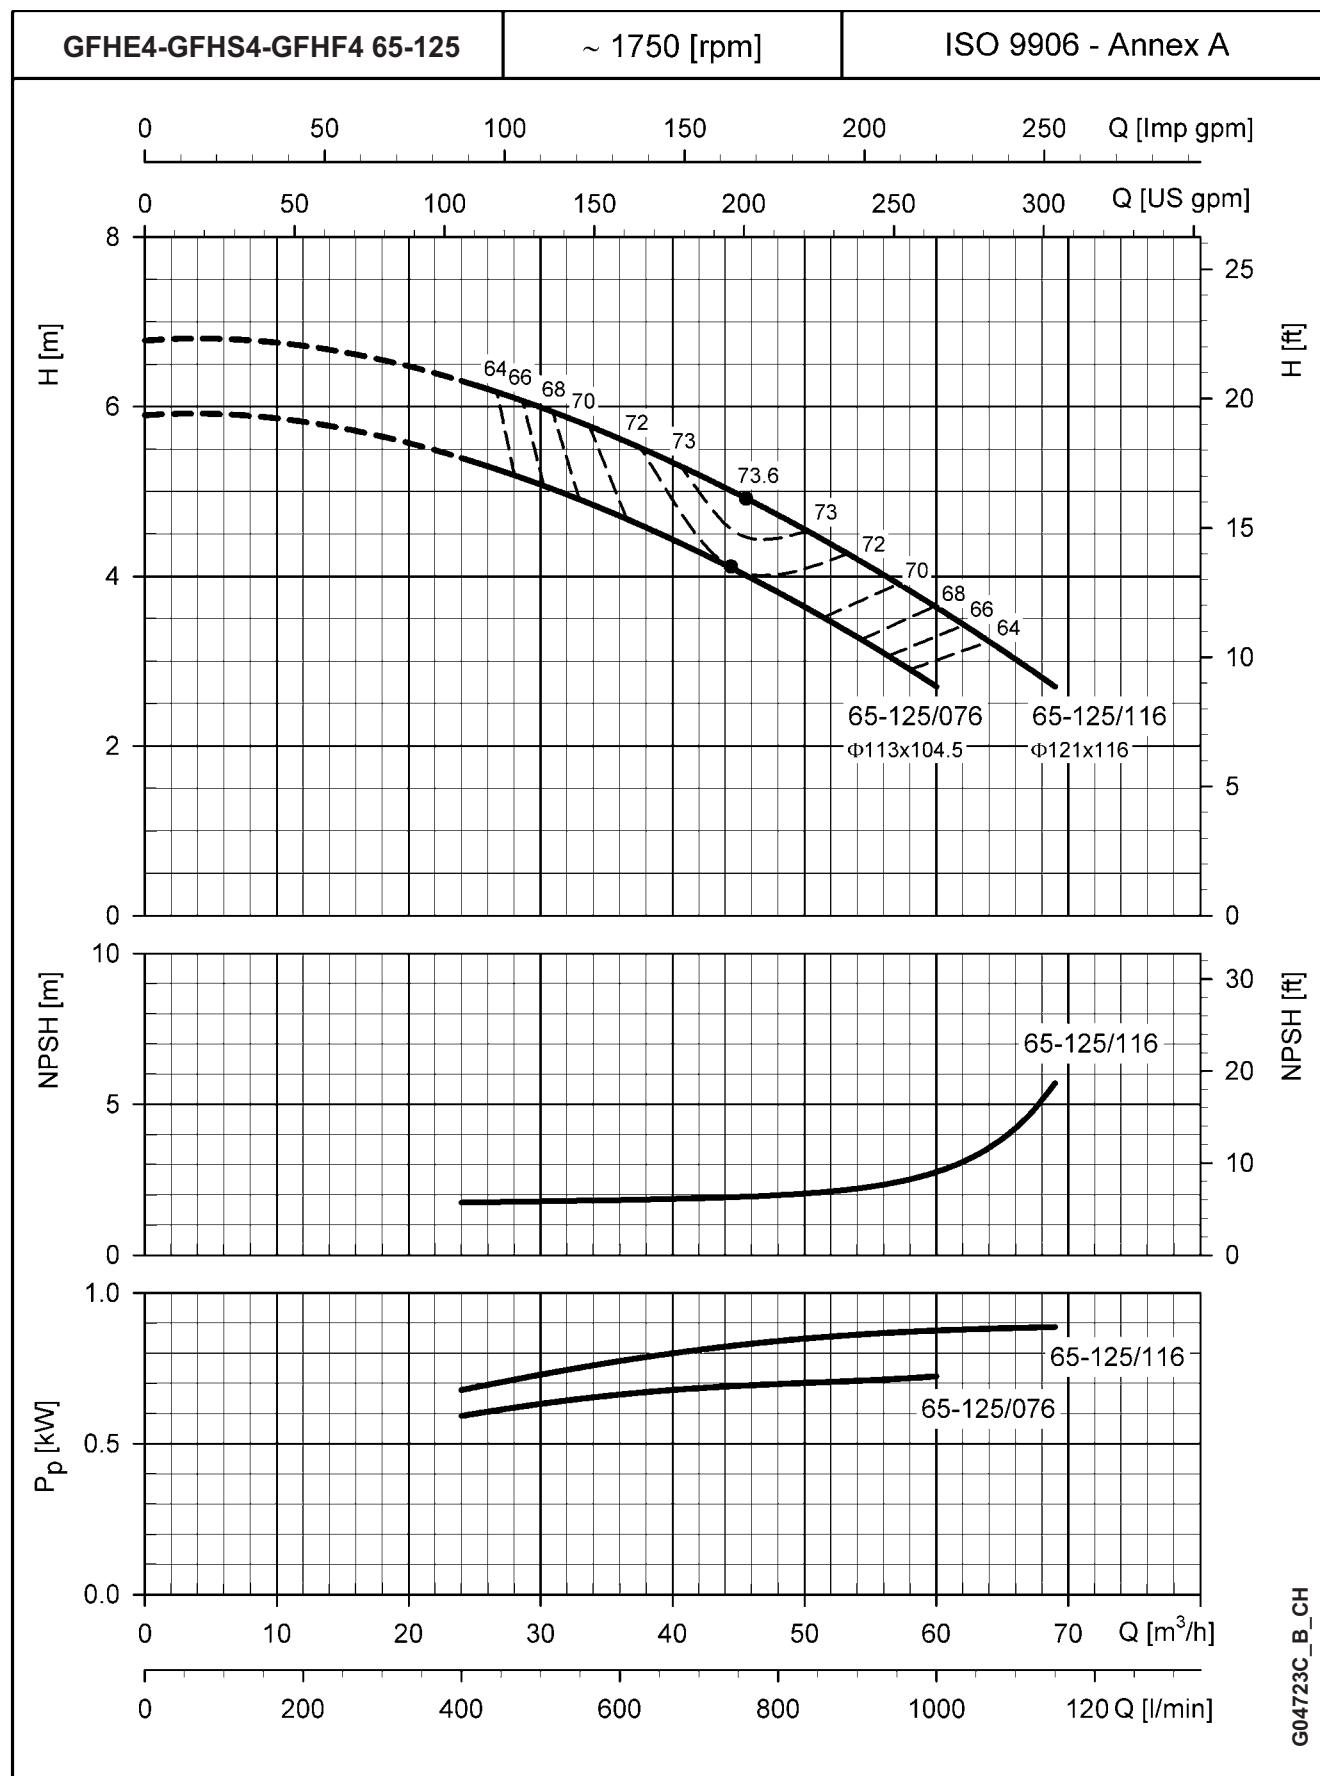


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE4-GFHS4-GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

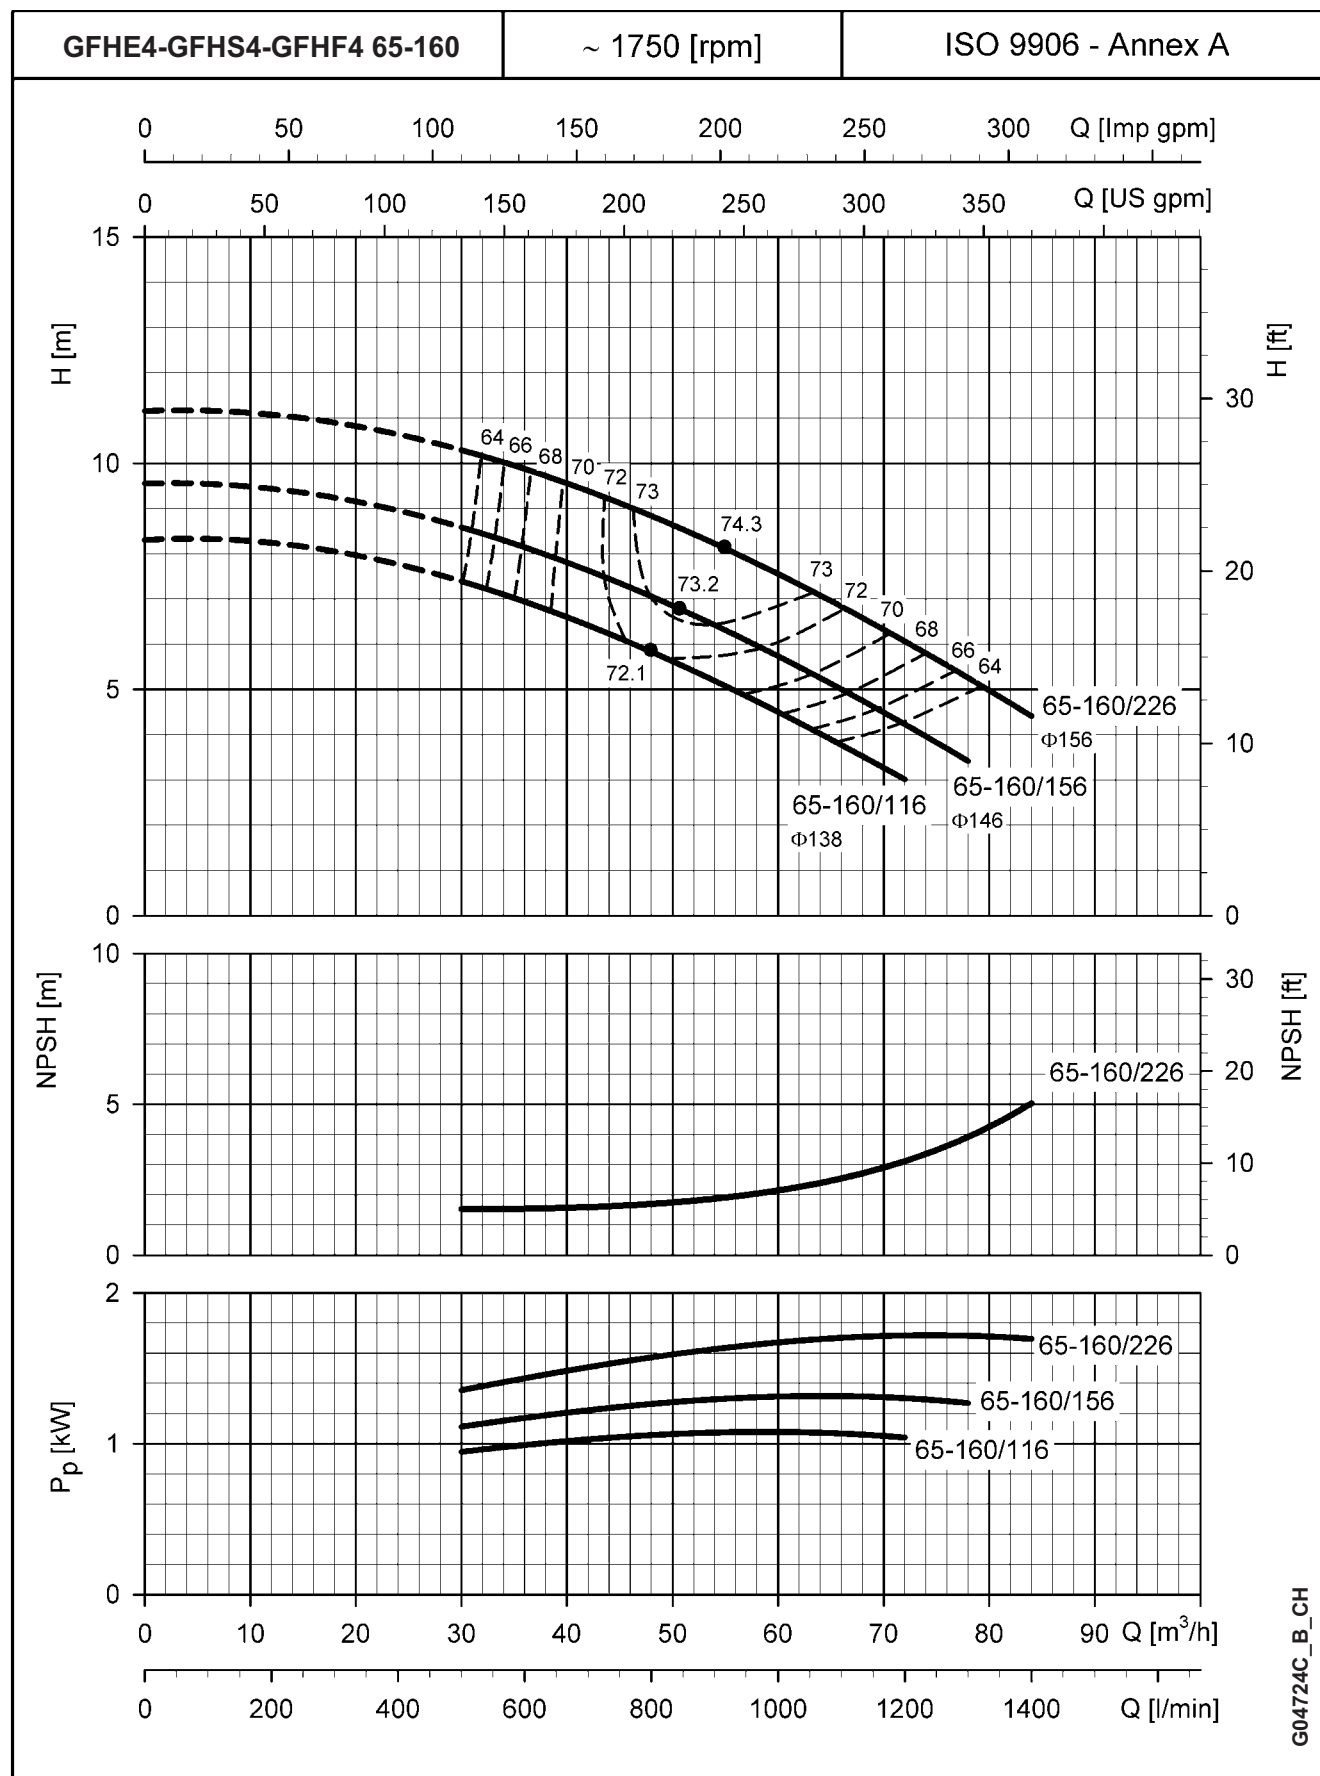


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE4-GFHS4-GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

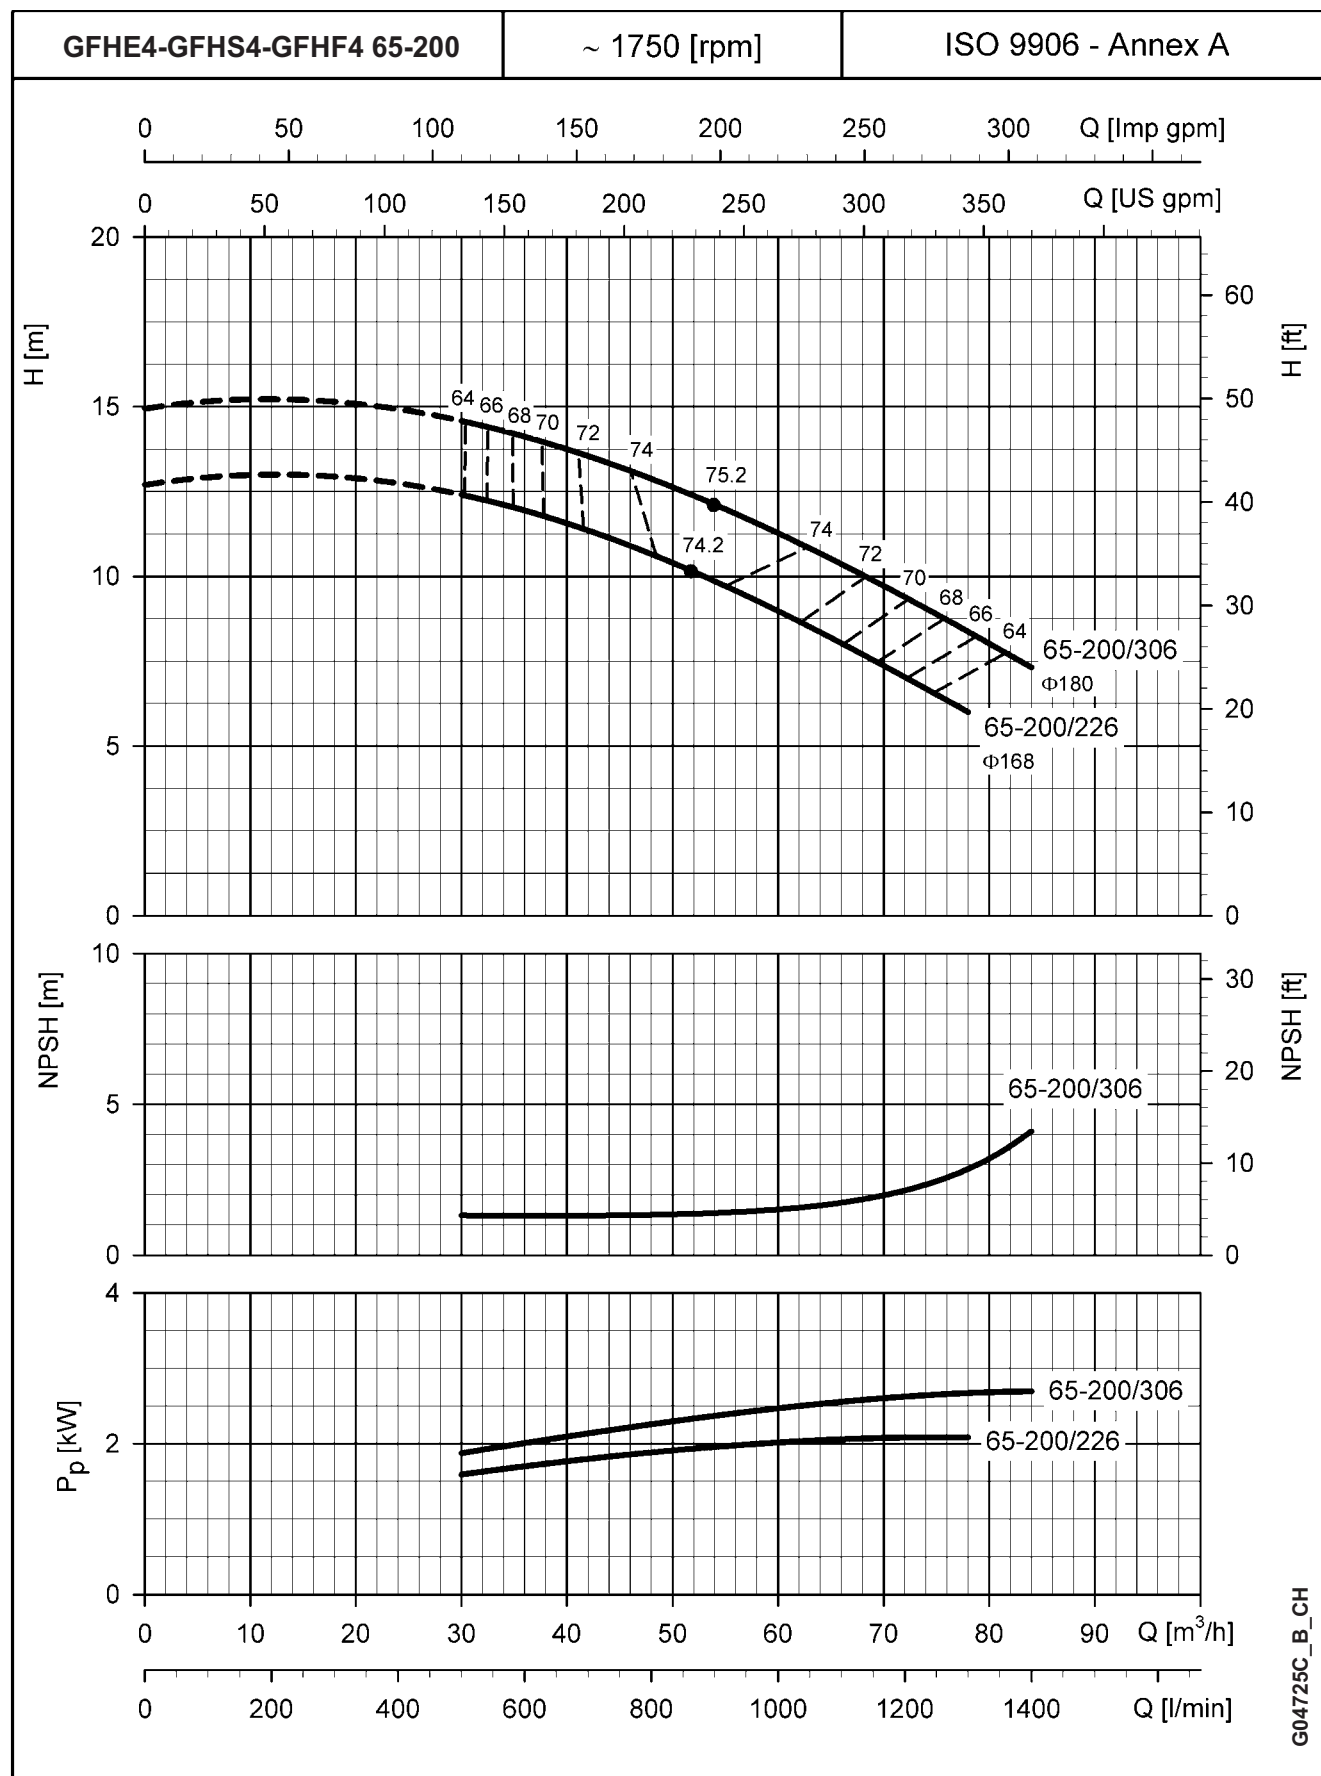


The NPSH values are laboratory values: for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE4-GFHS4-GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

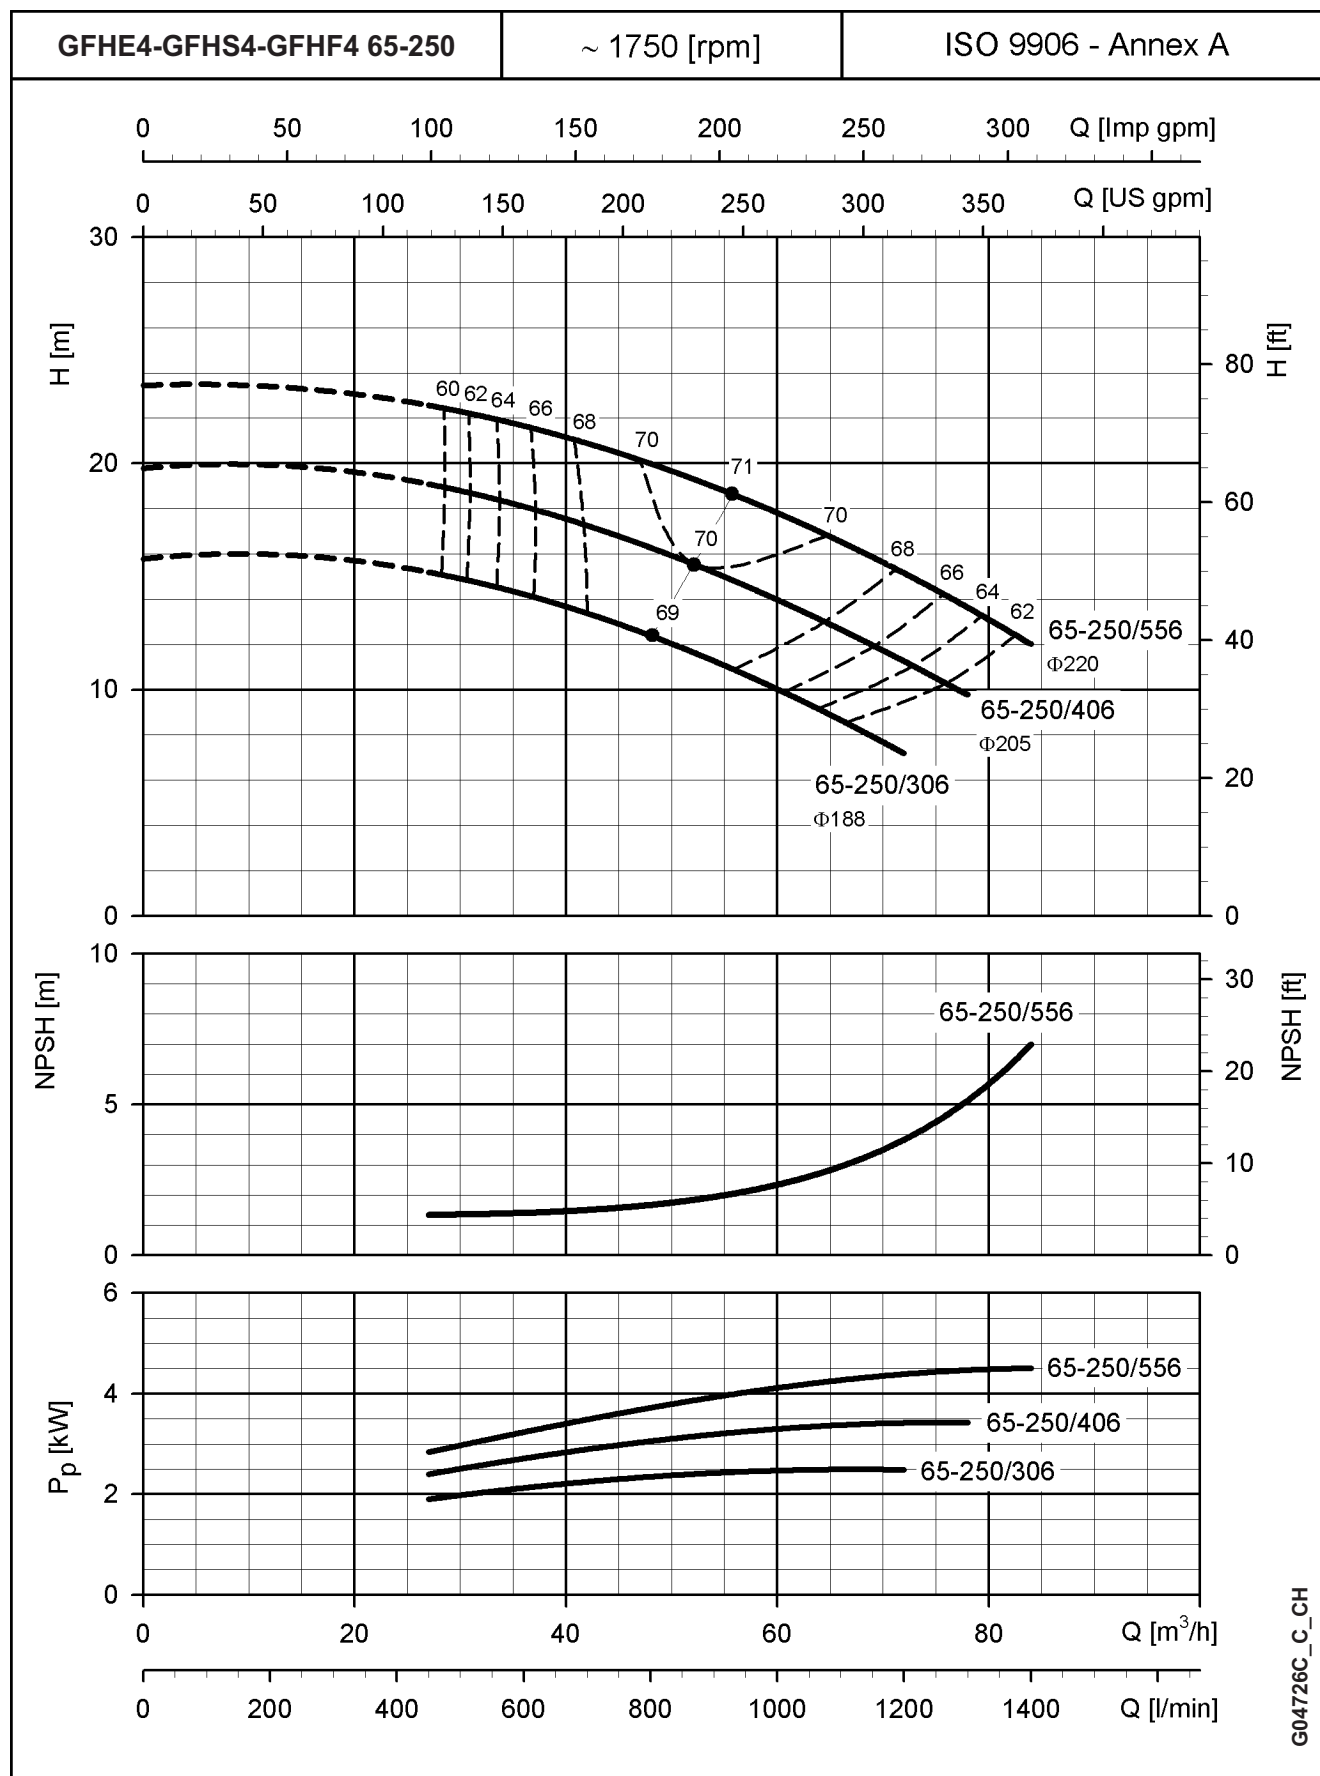


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHS4-GFHF4 SERIES OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES

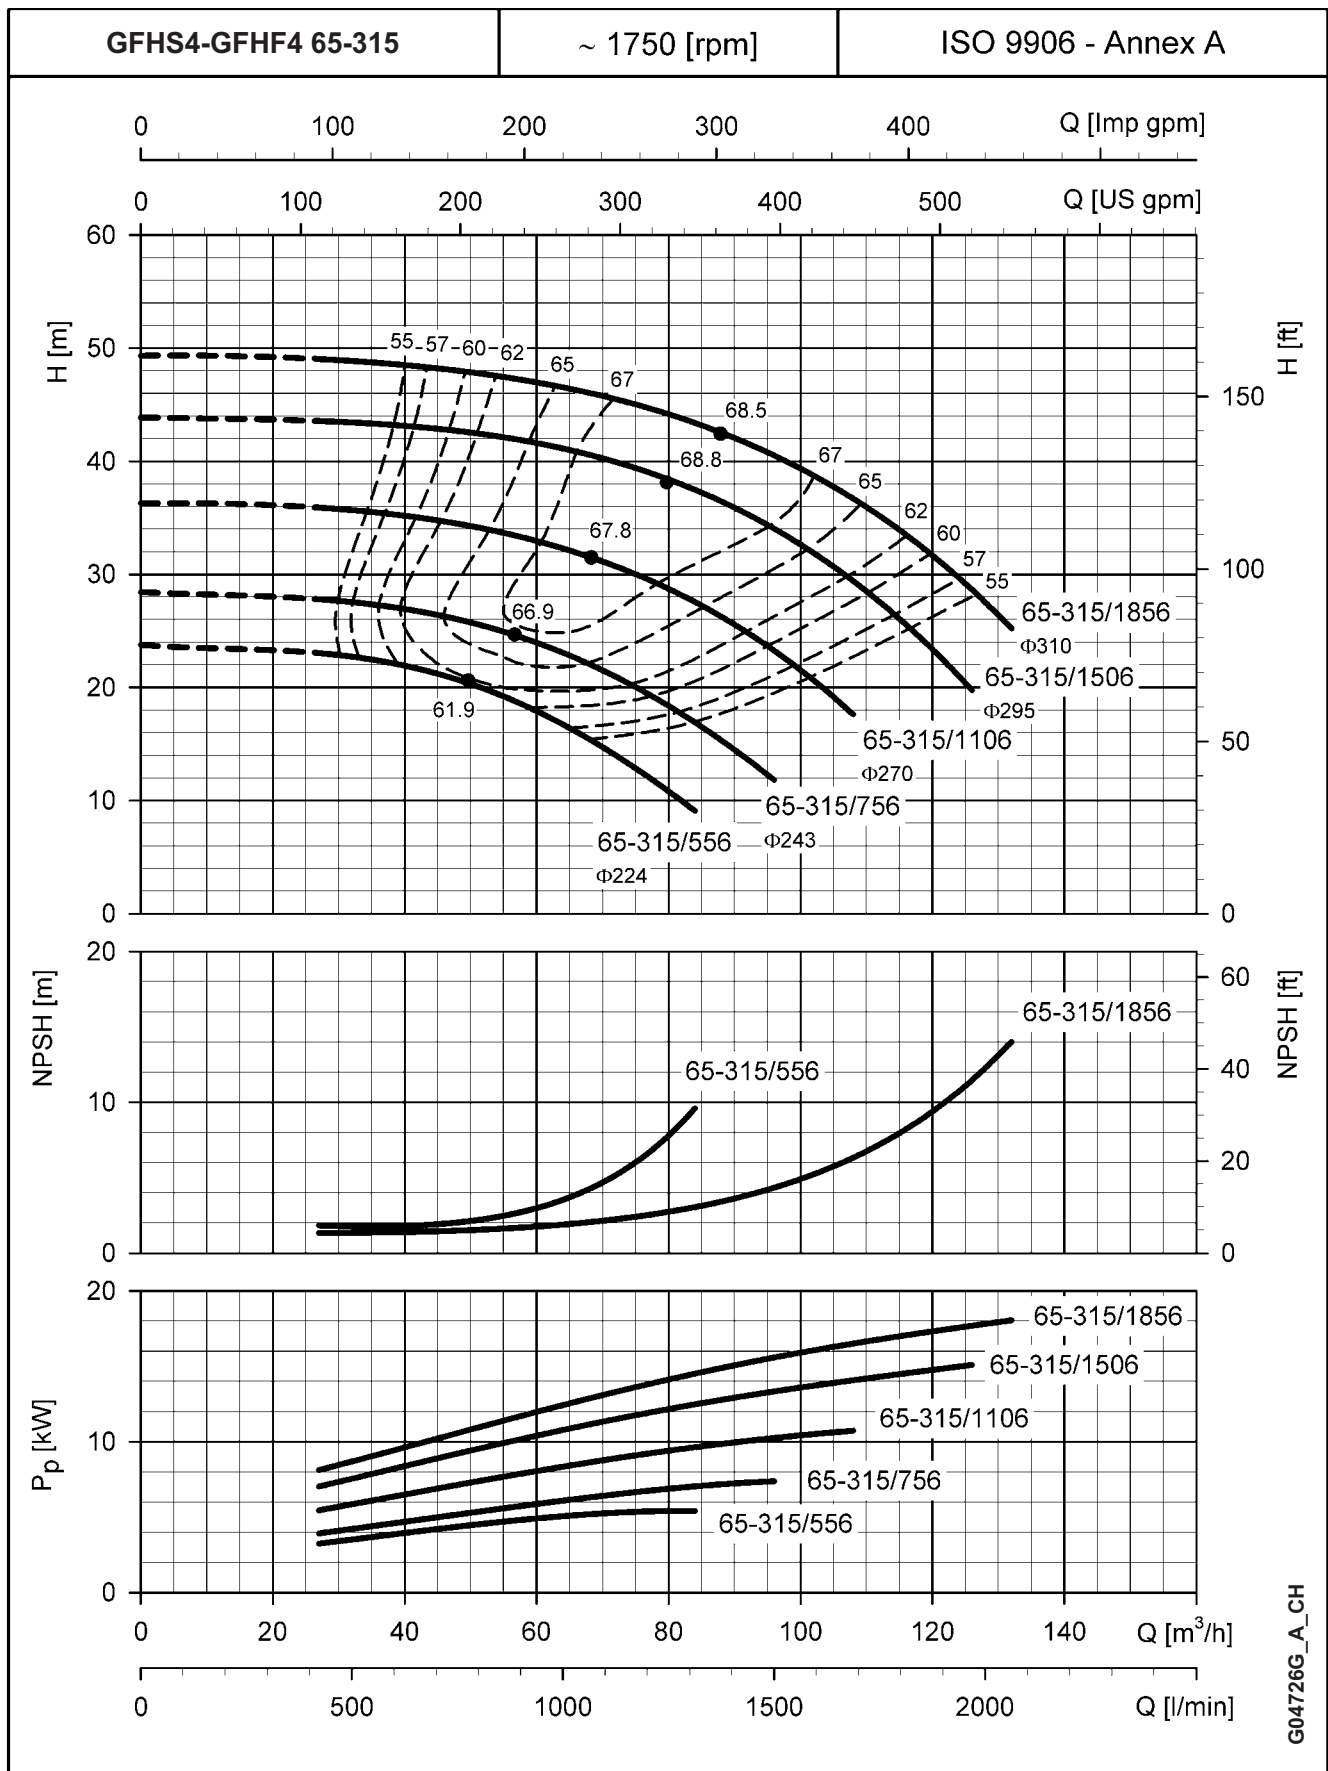


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE4-GFHS4-GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

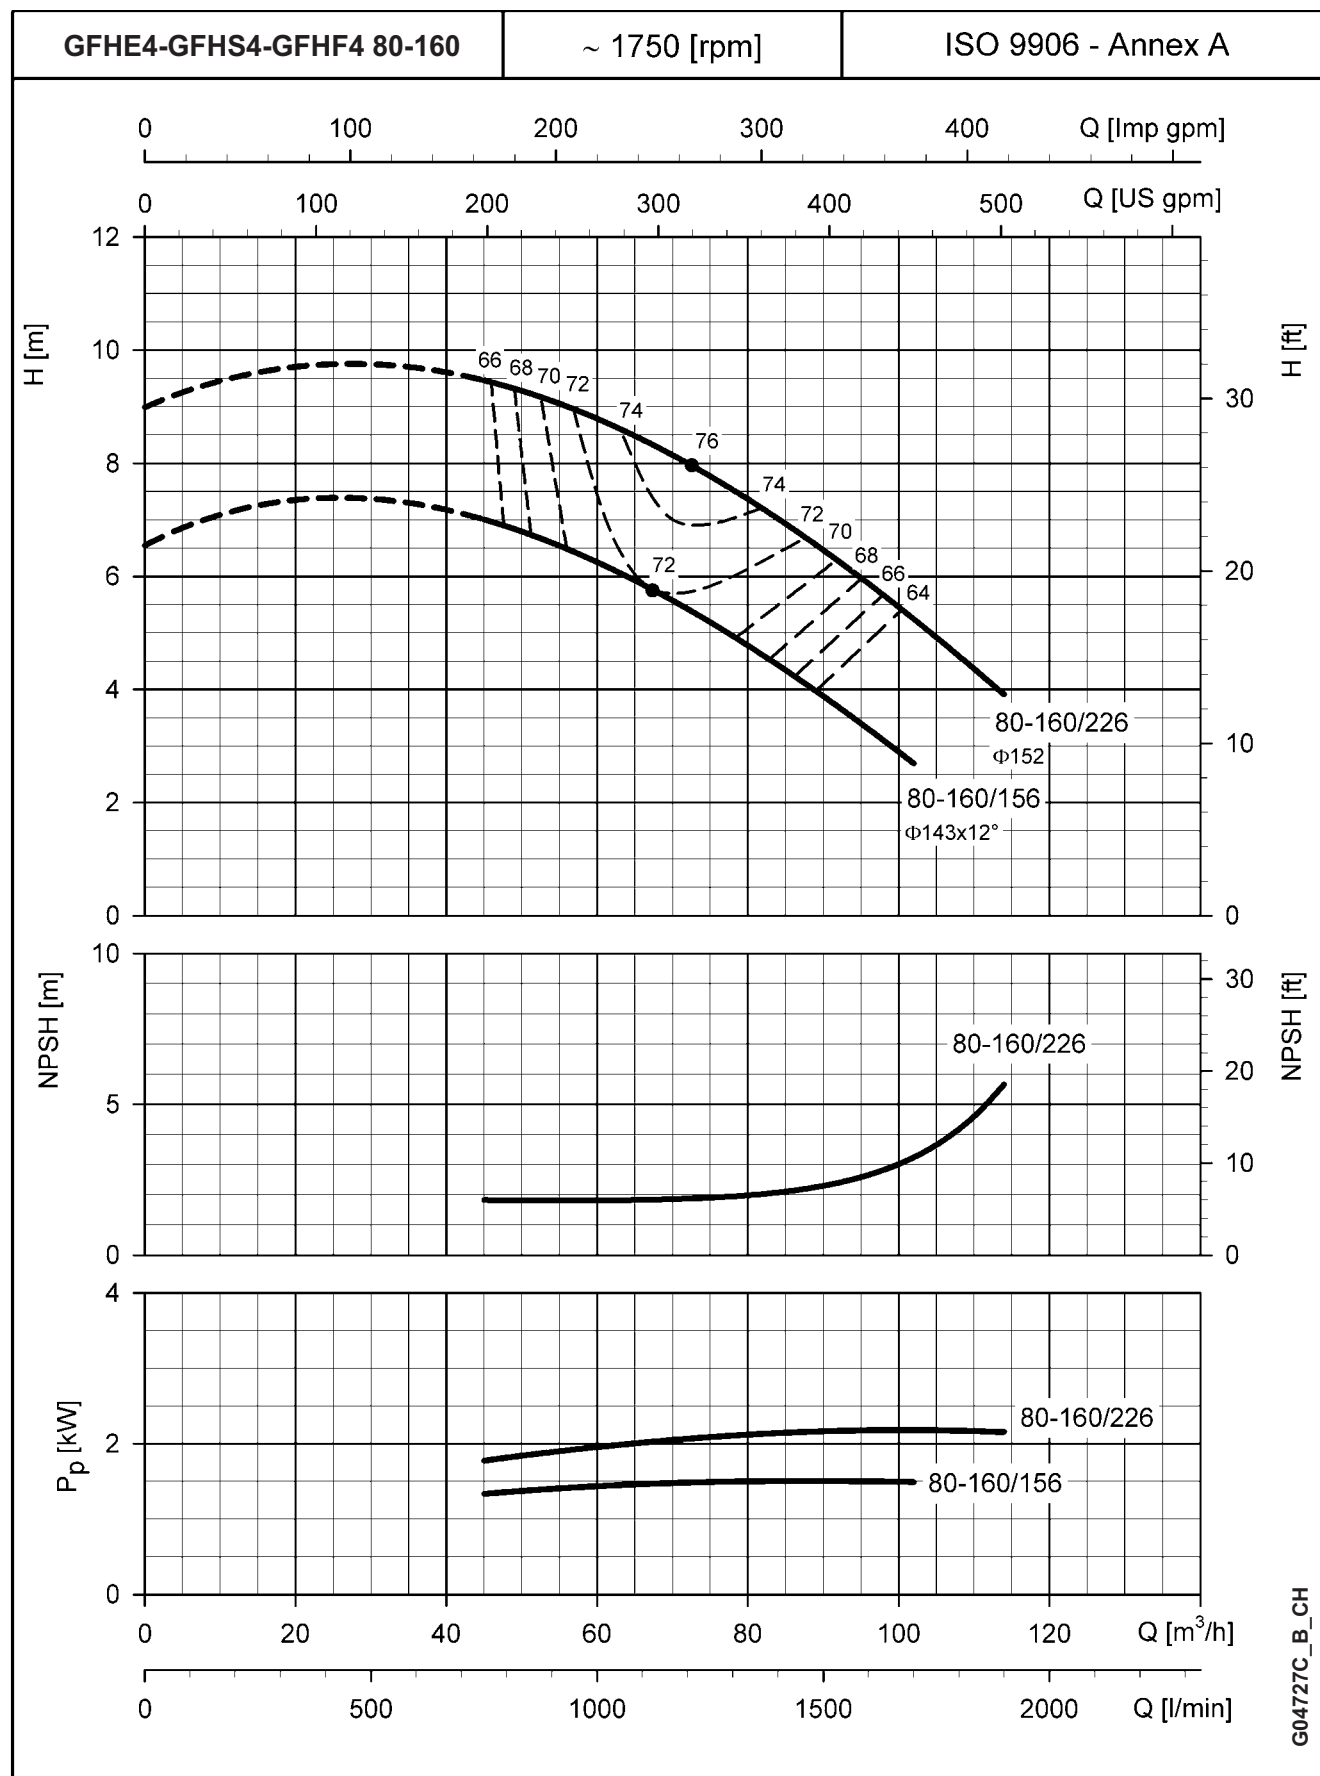


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE4-GFHS4-GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

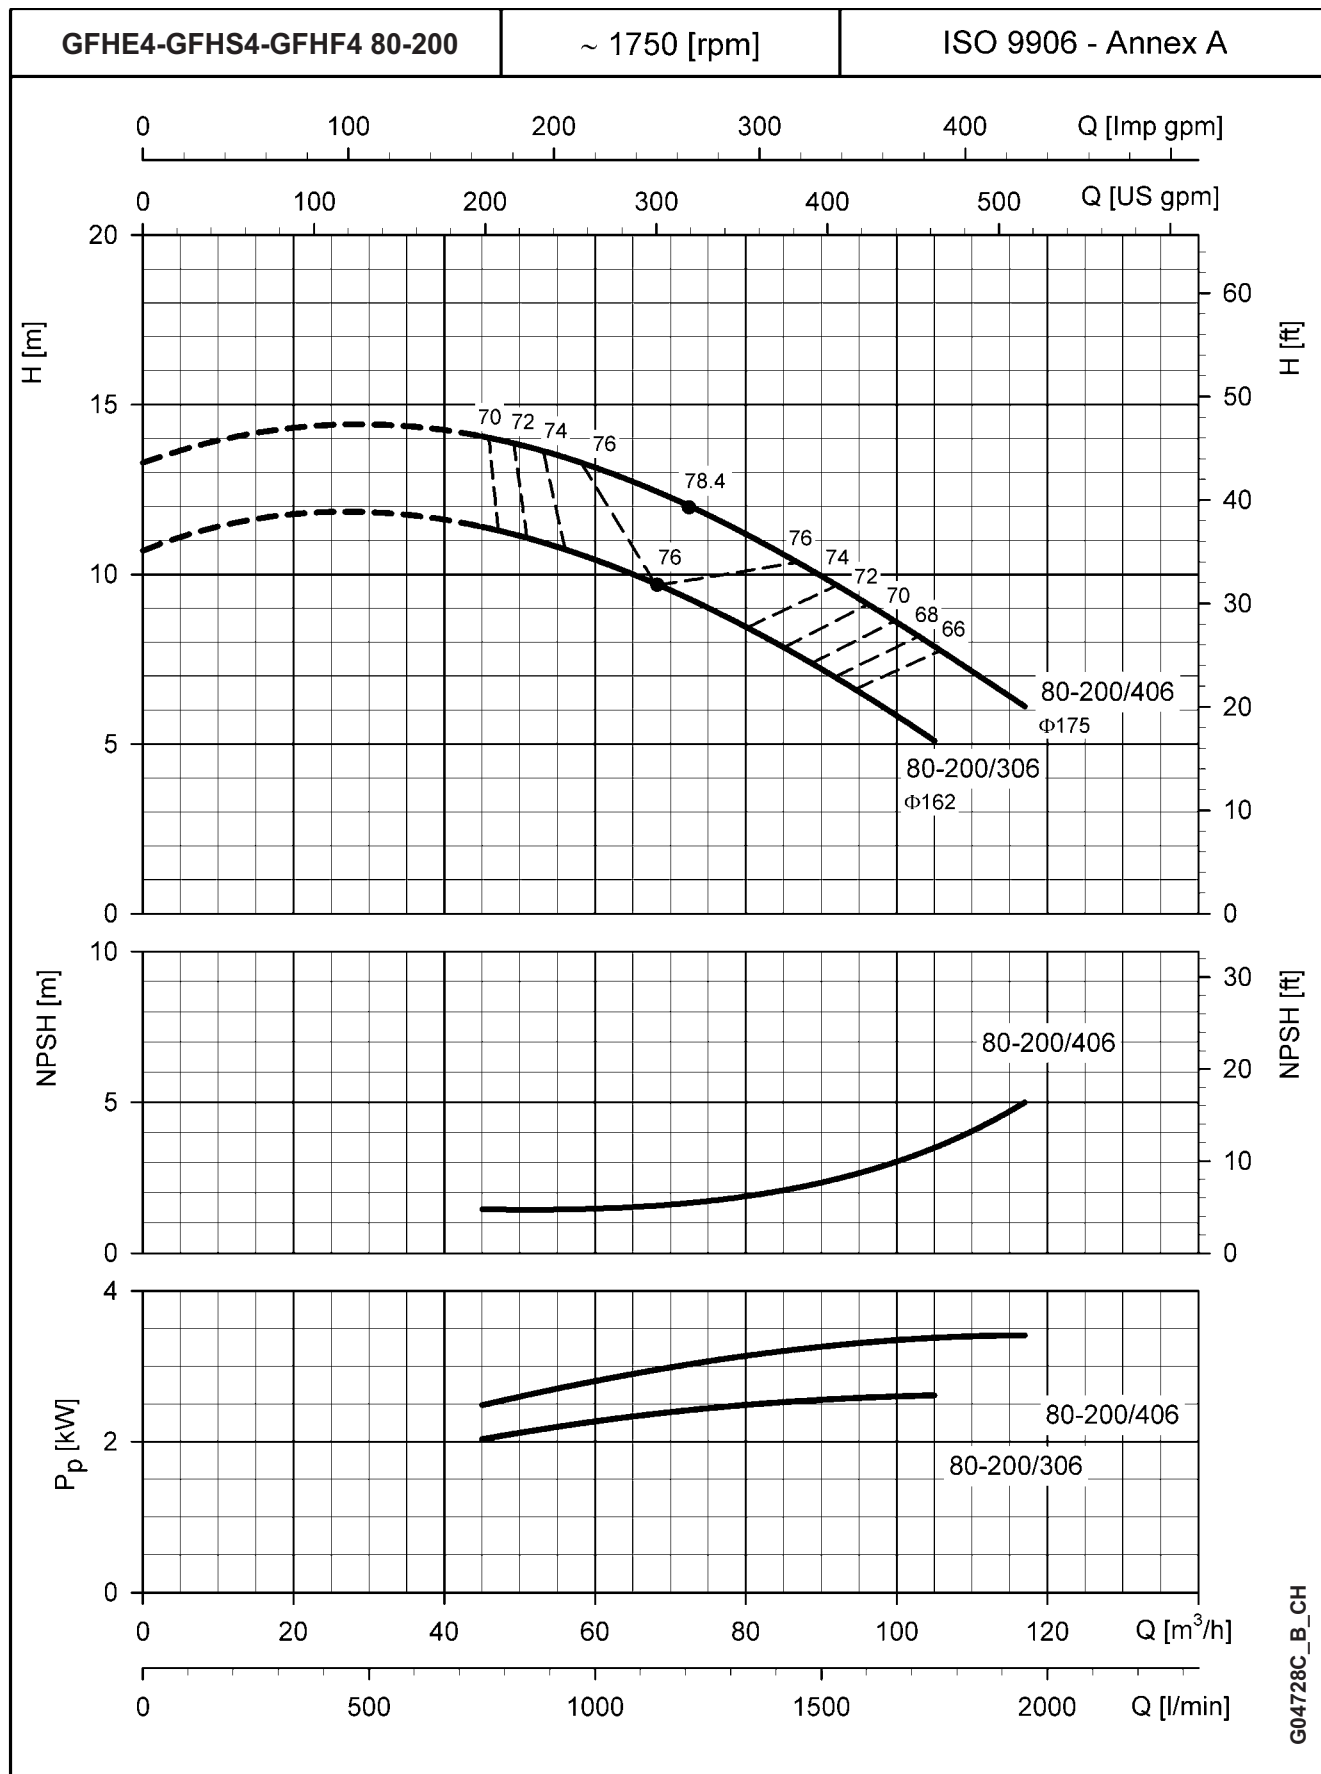


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHE4-GFHS4-GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

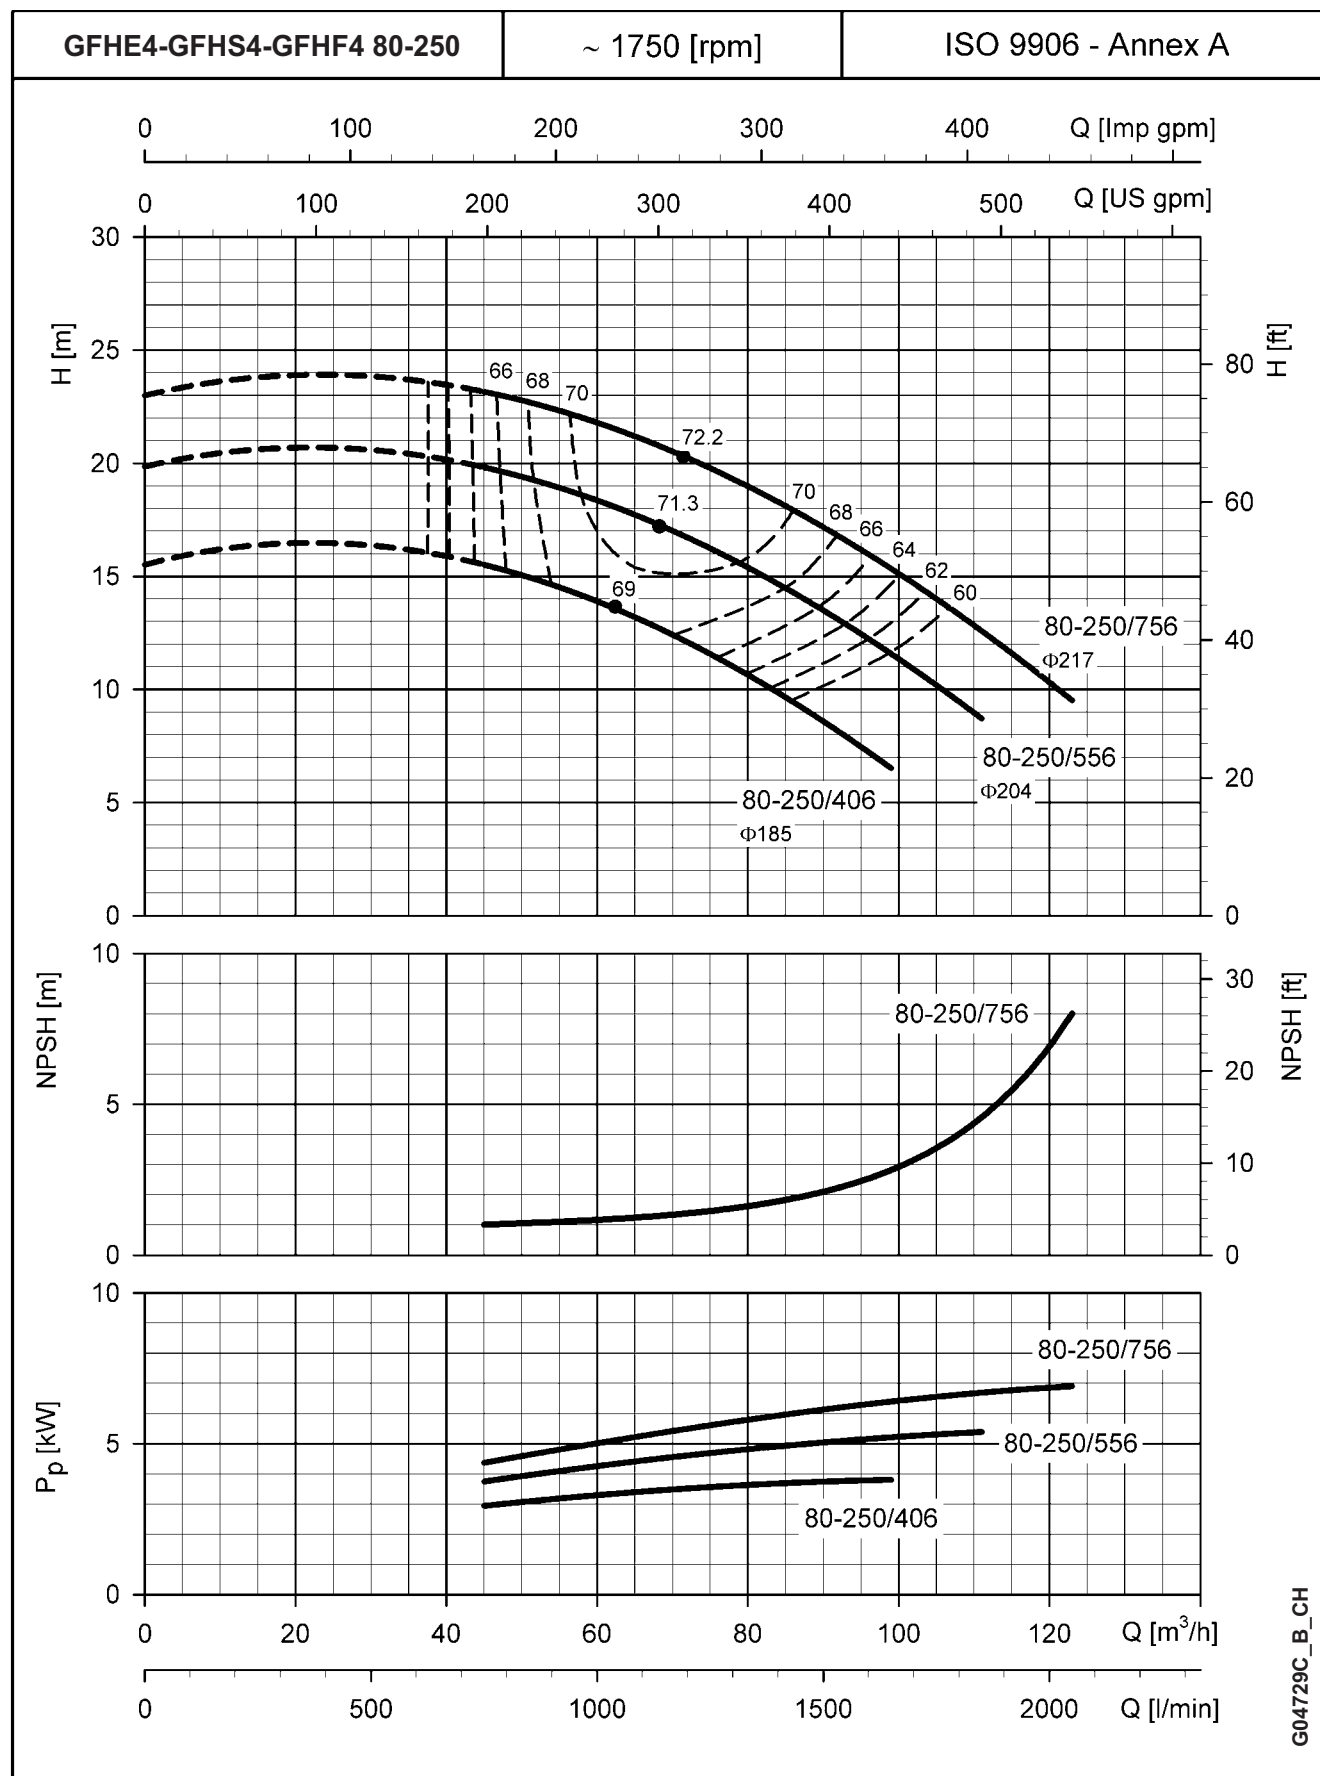


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHS4-GFHF4 SERIES OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES

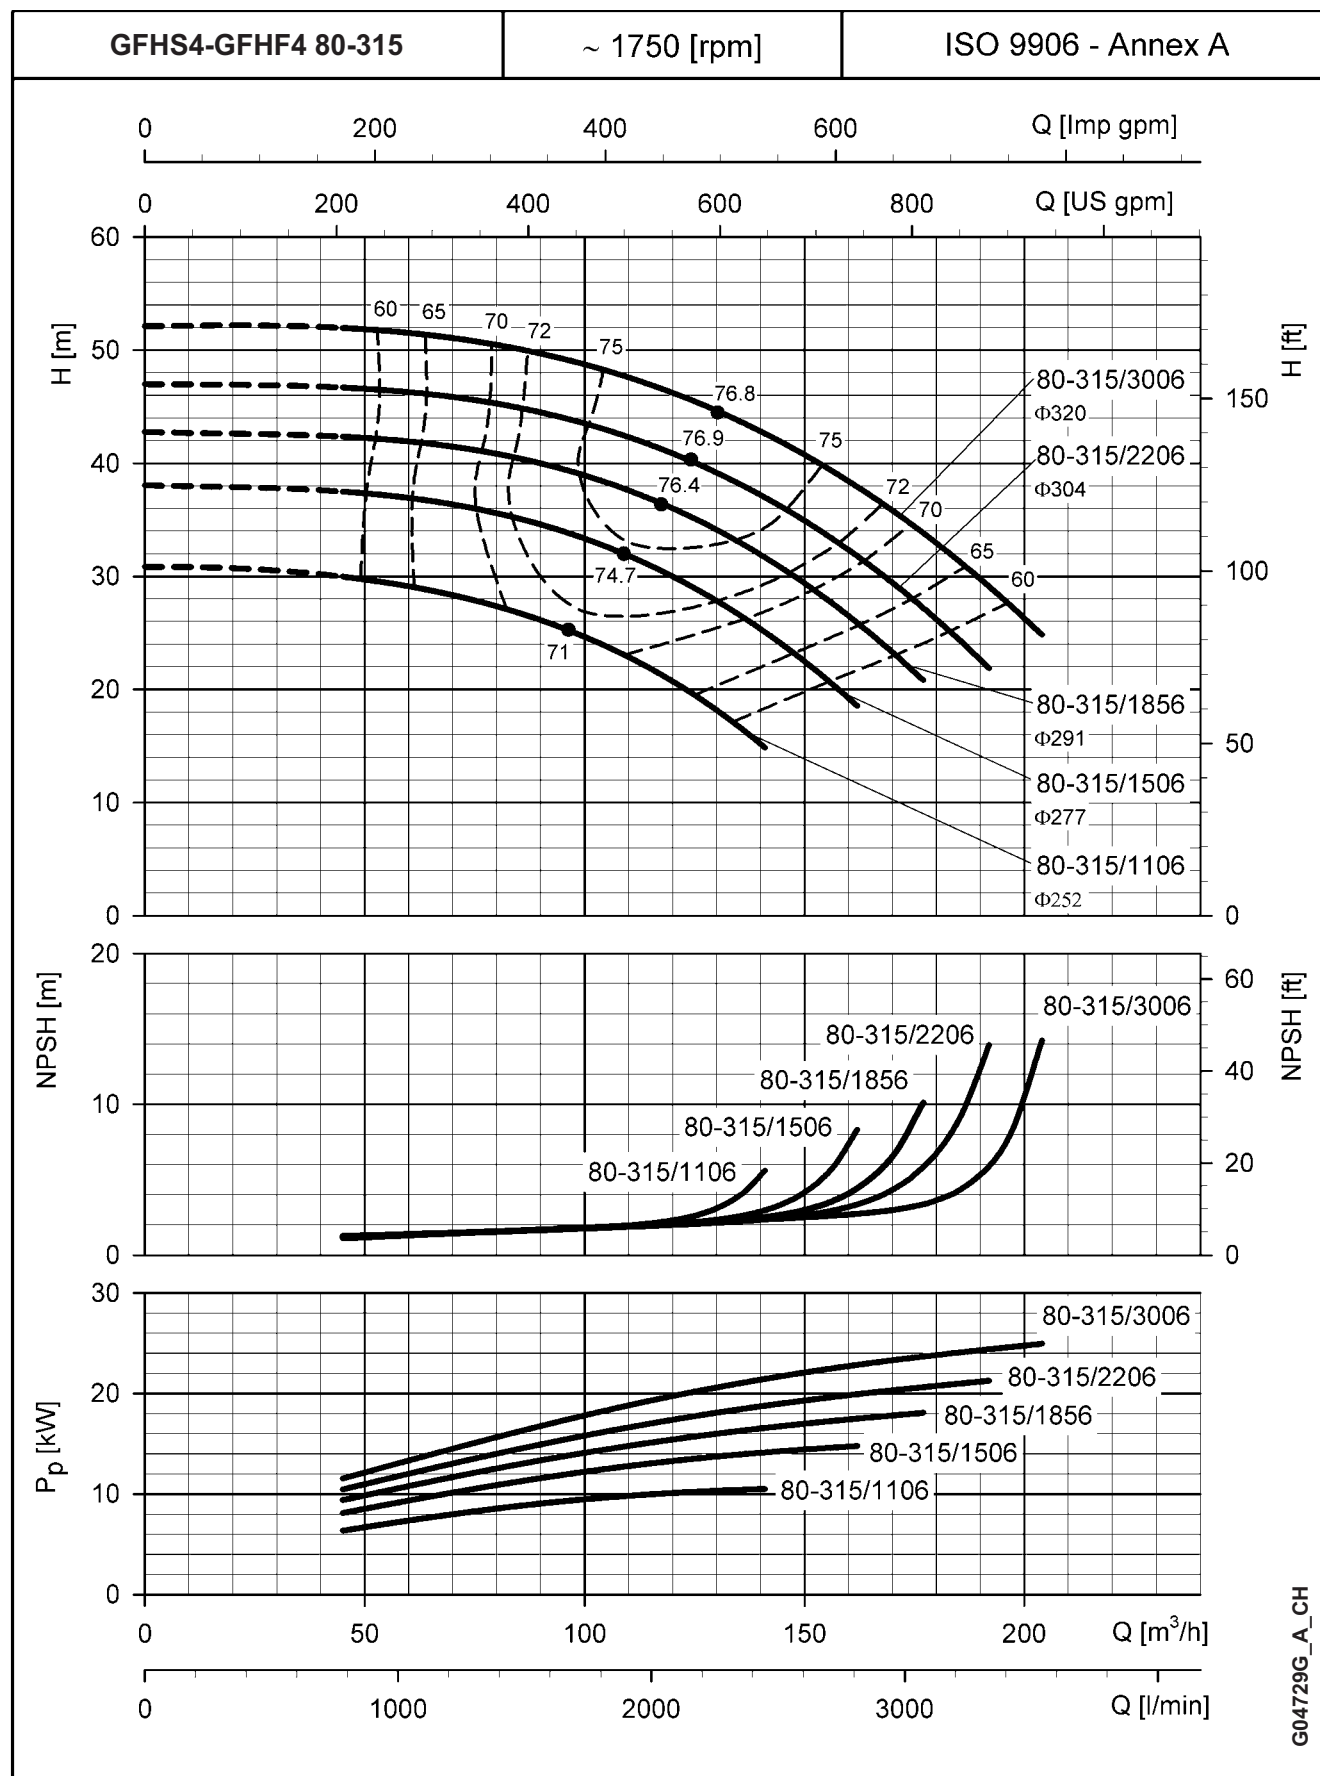


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

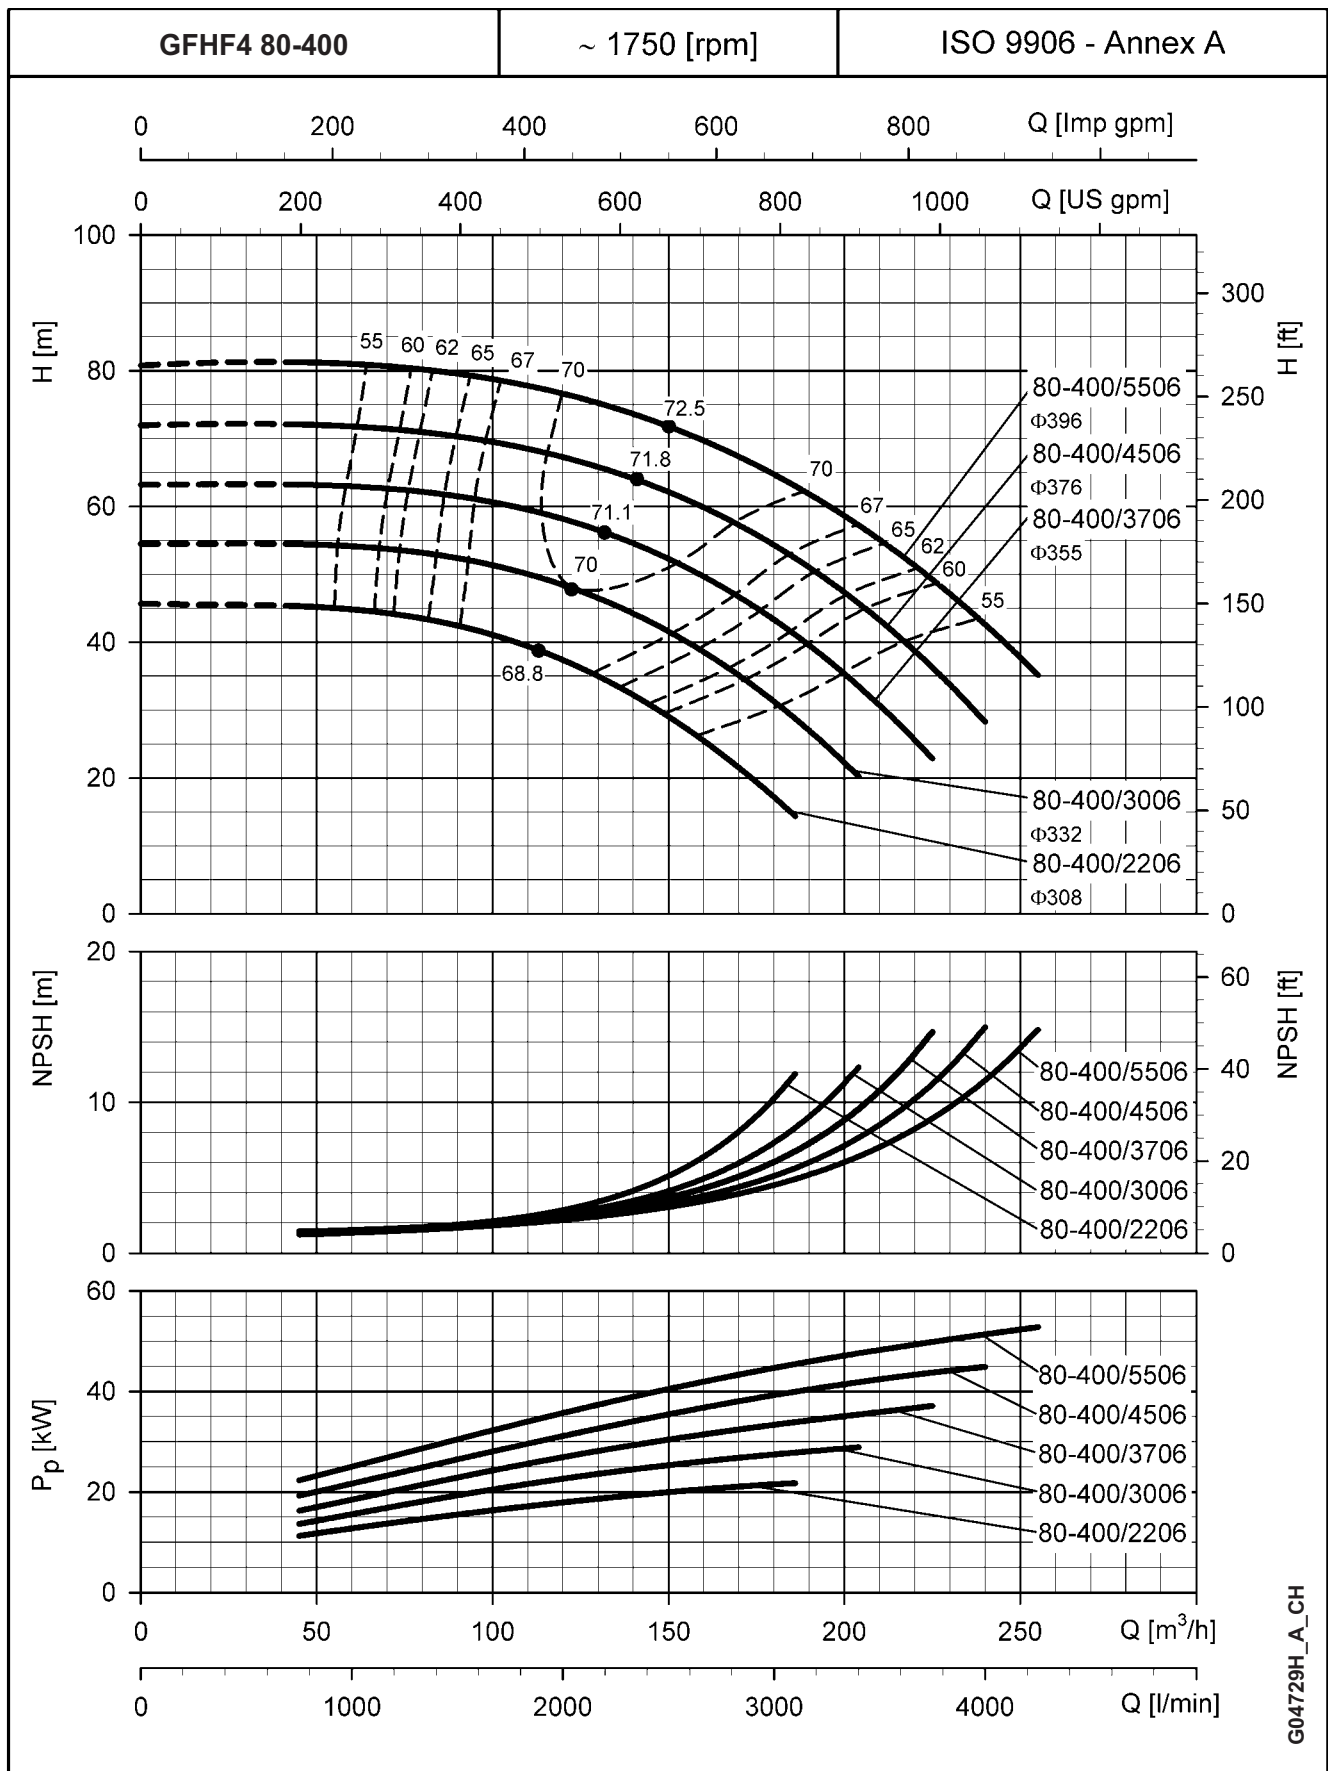


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHS4-GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

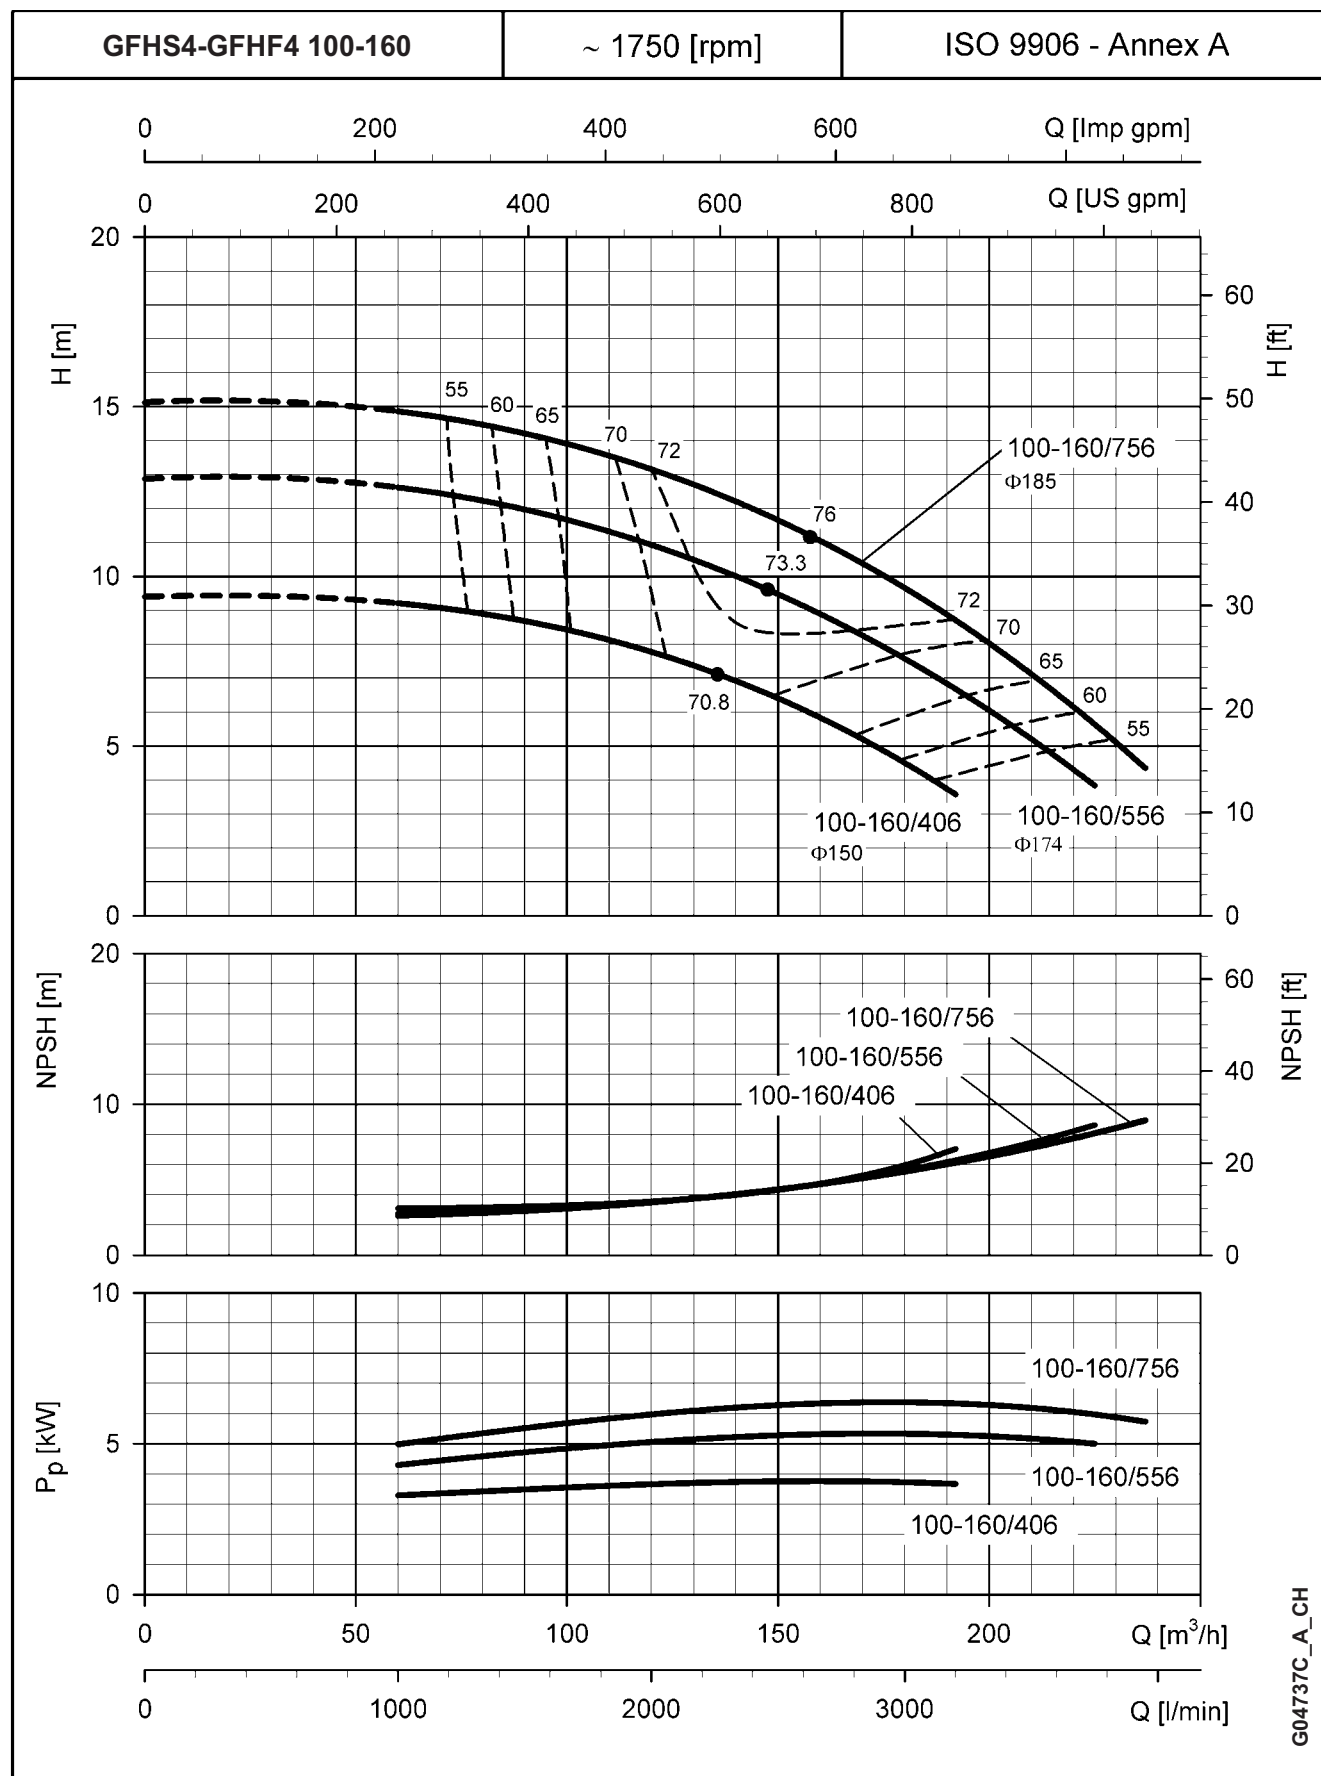


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHS4-GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

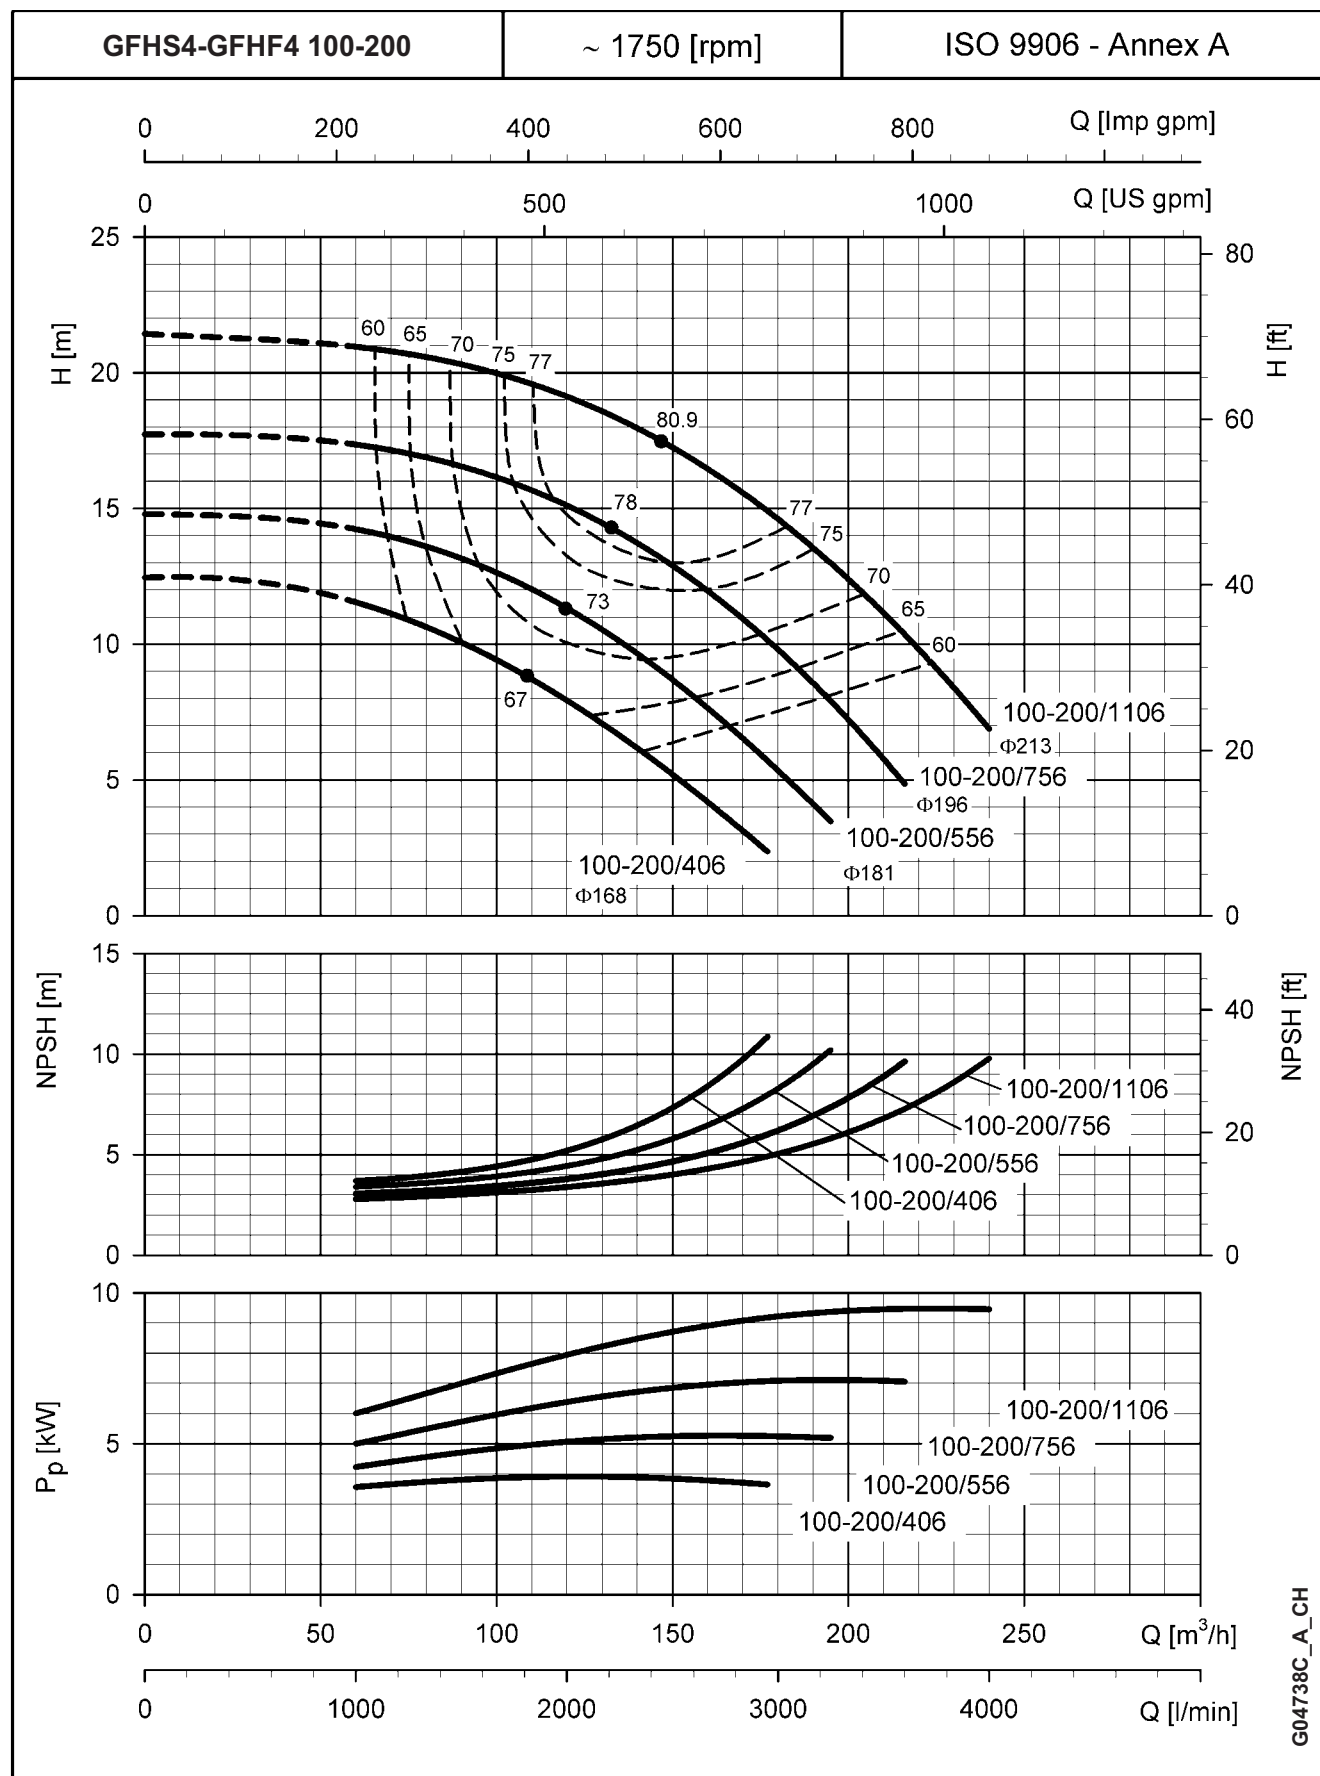


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHS4-GFHF4 SERIES OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES

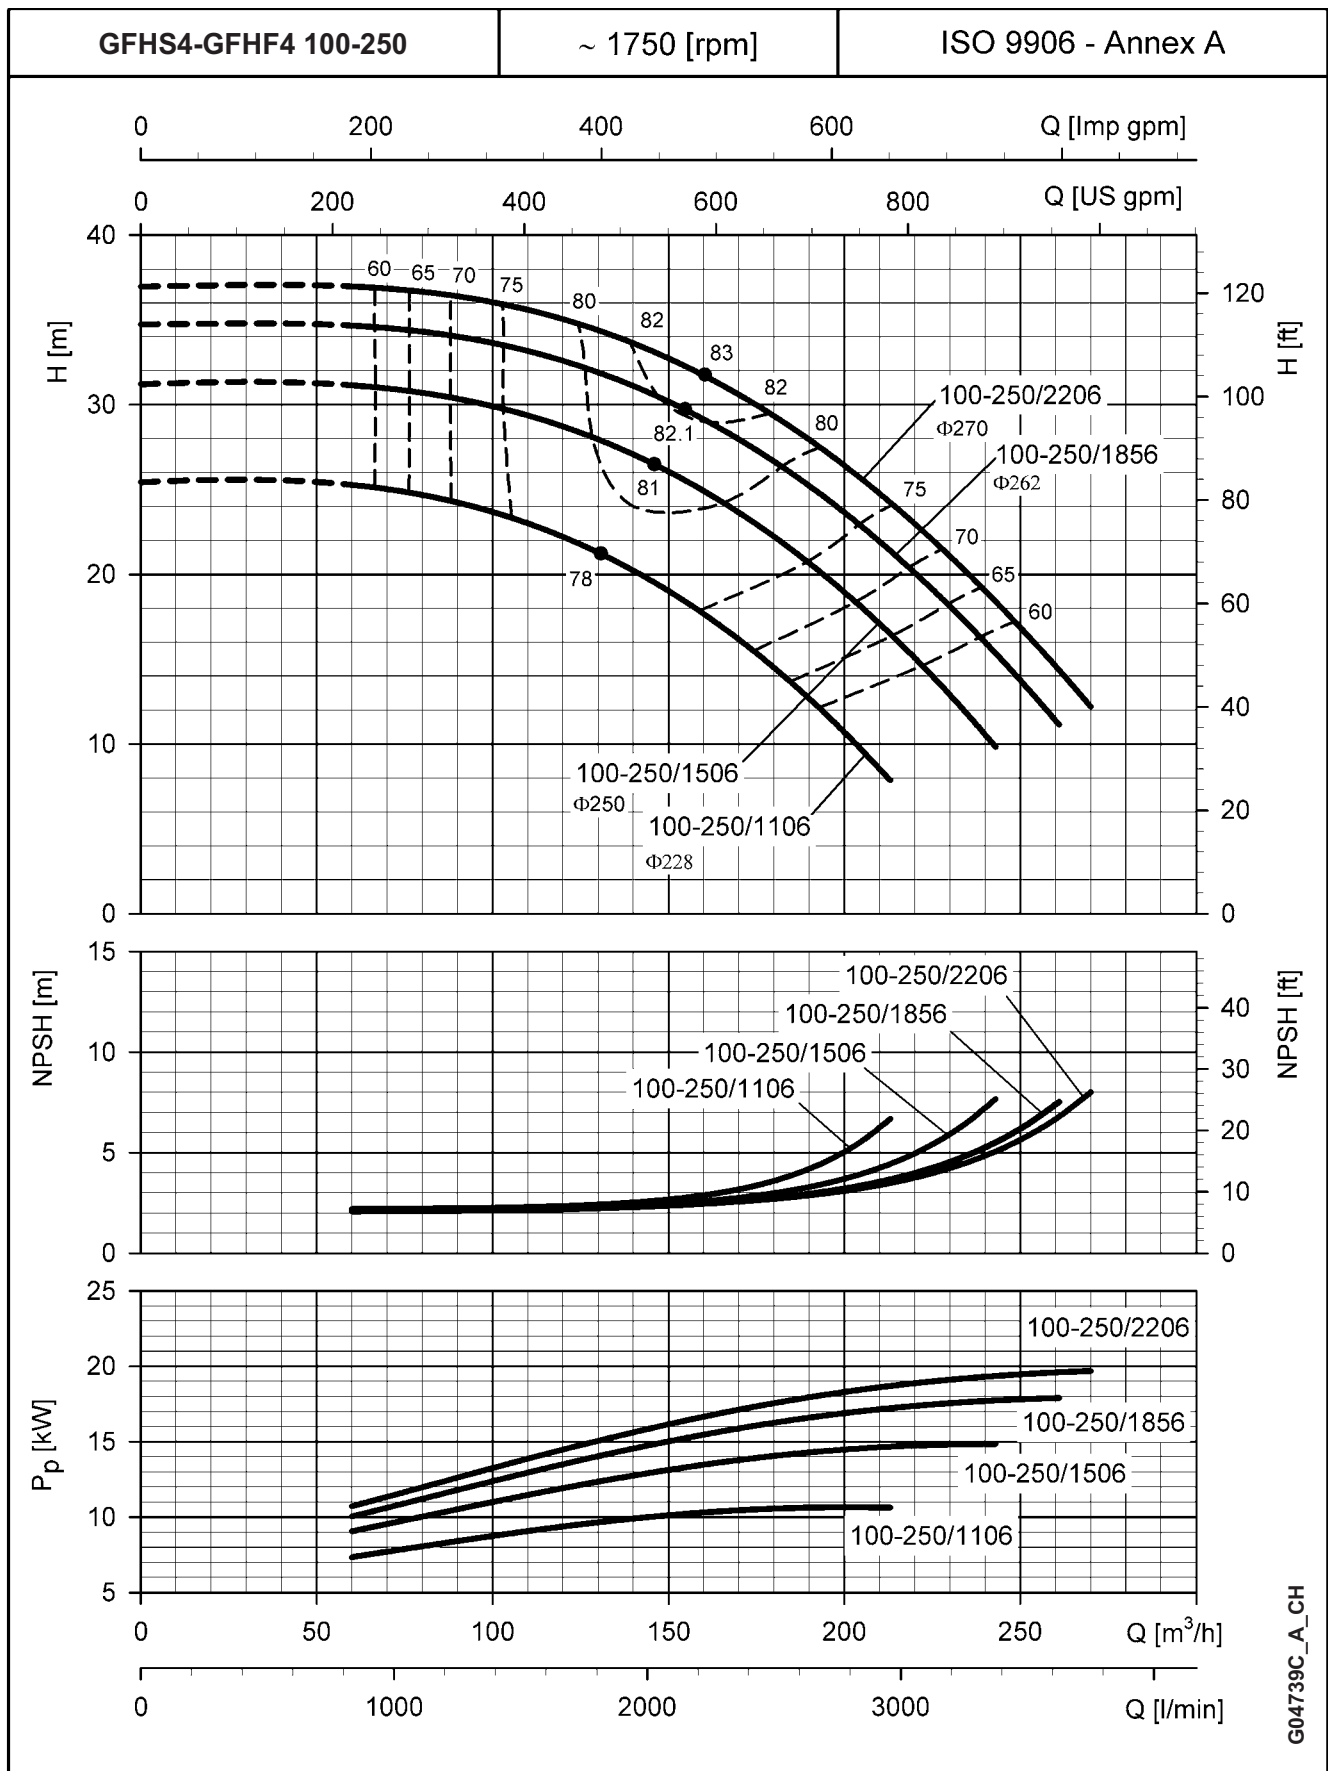


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHS4-GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

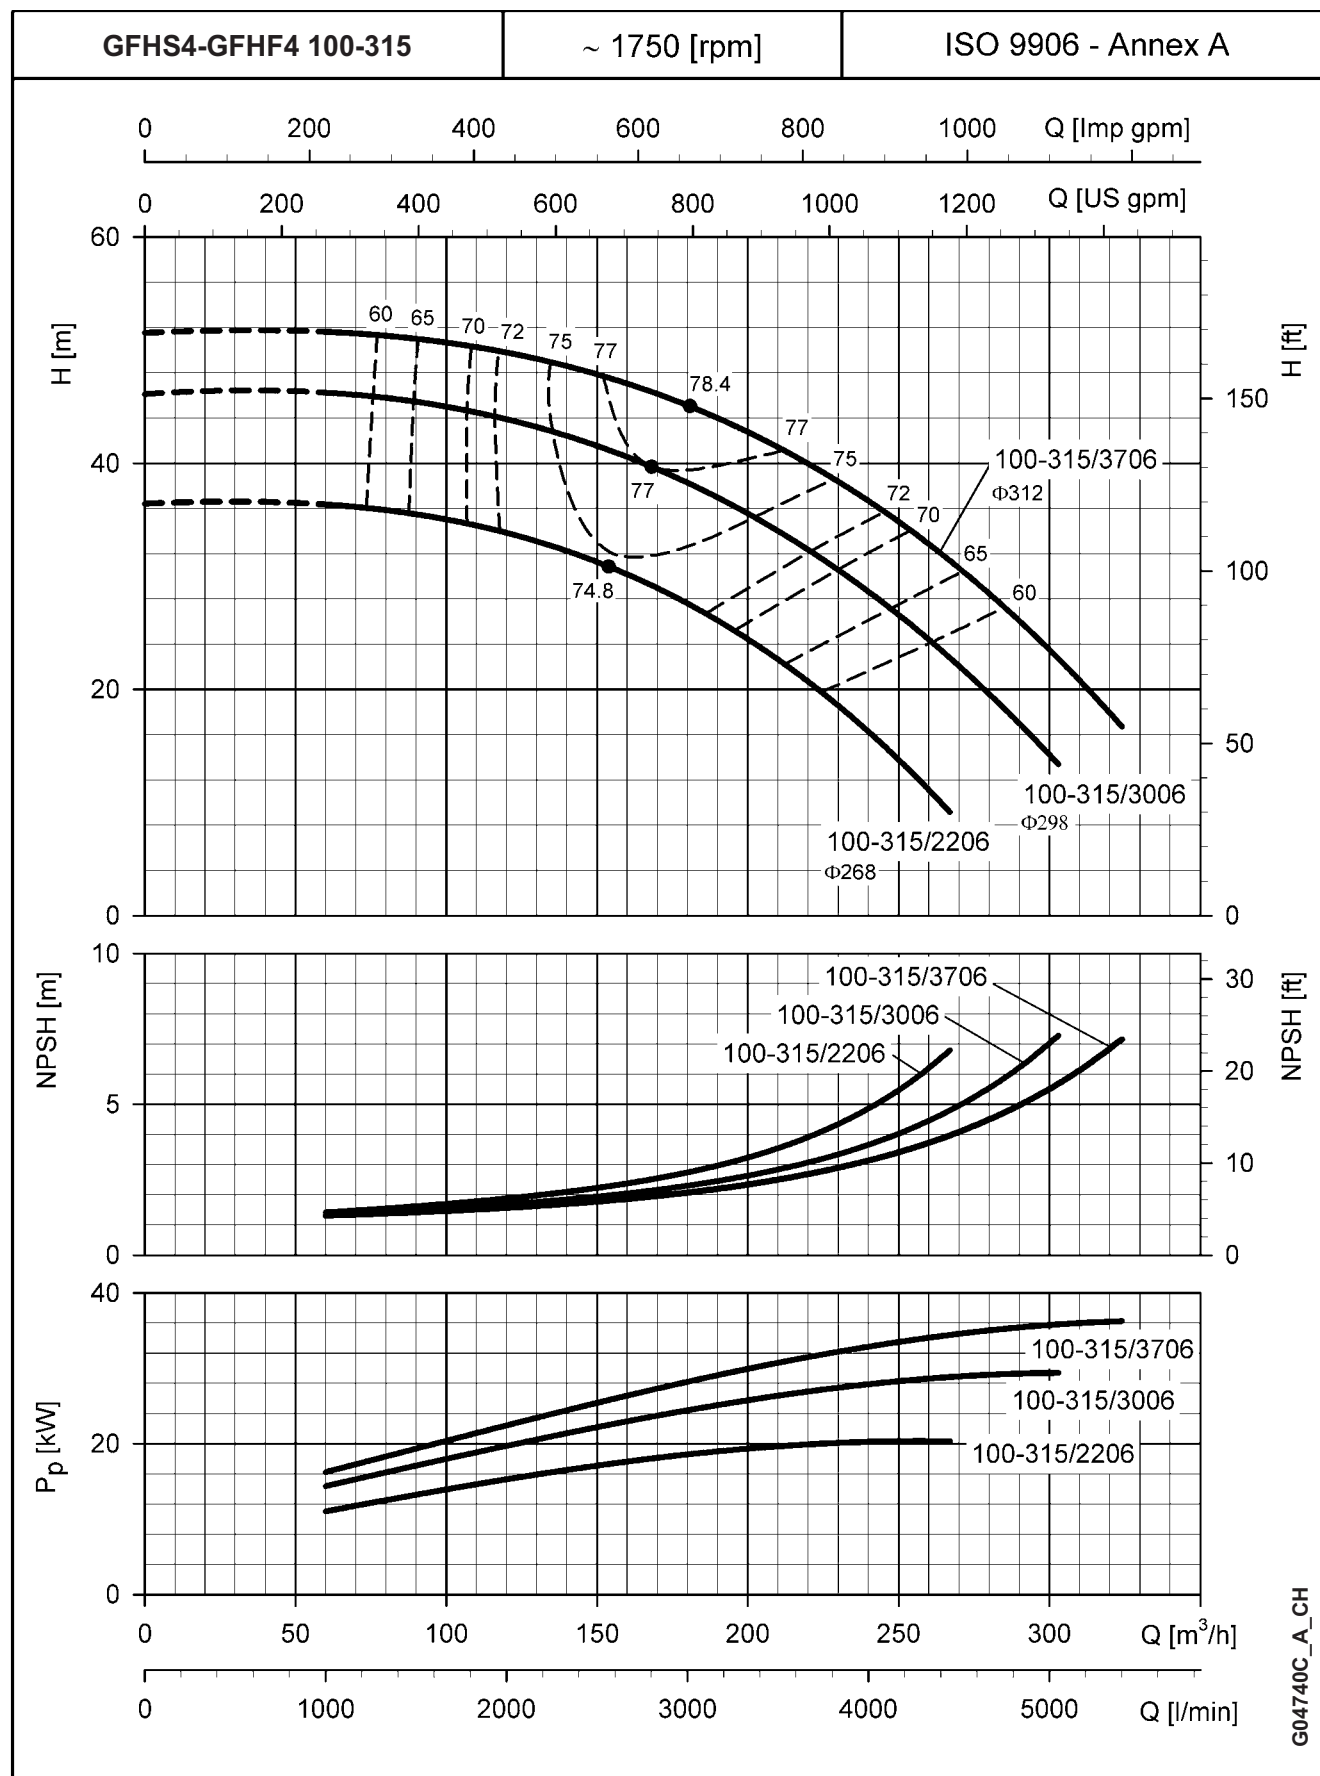


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHF4 SERIES OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES

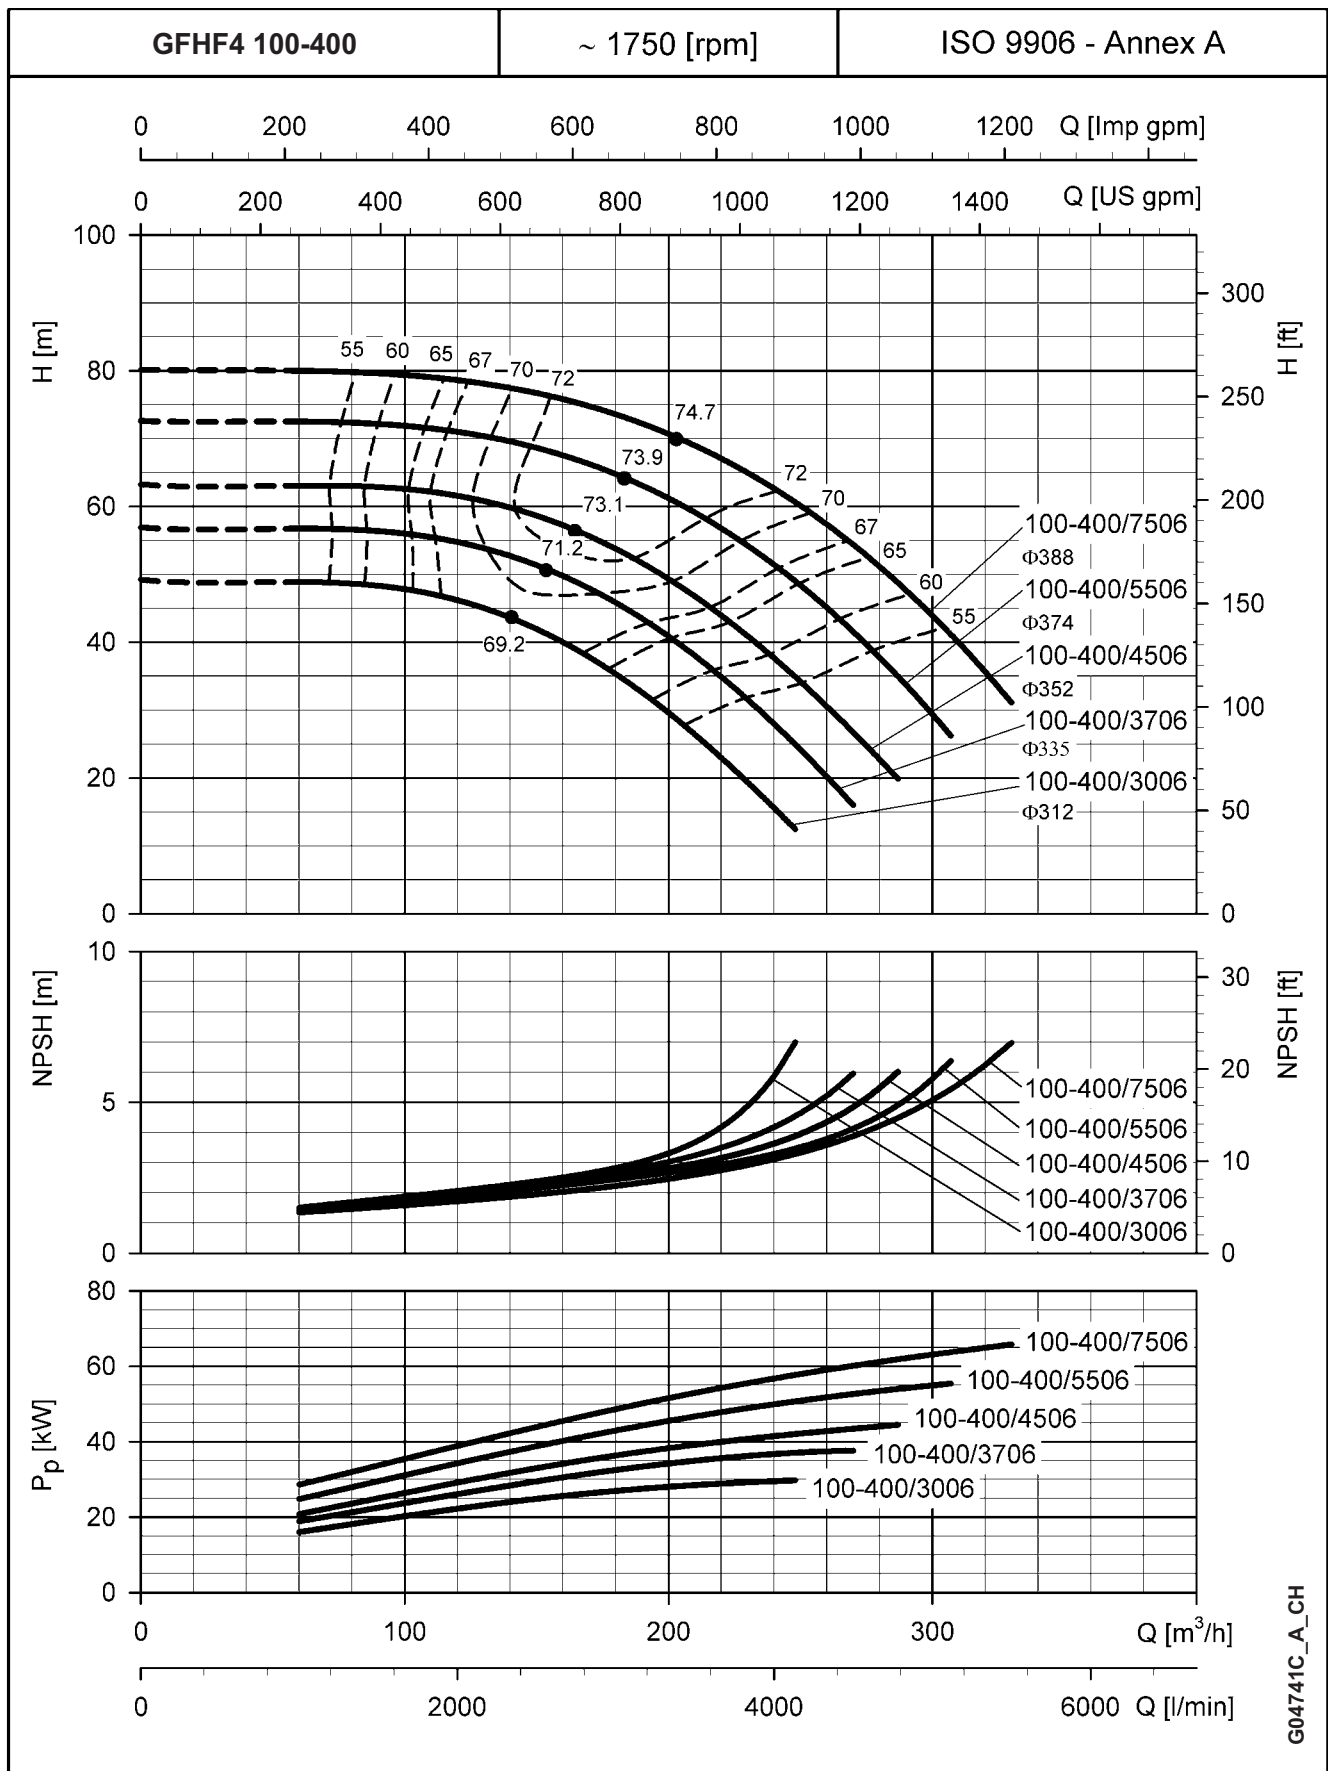


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHS4-GFHF4 SERIES OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES

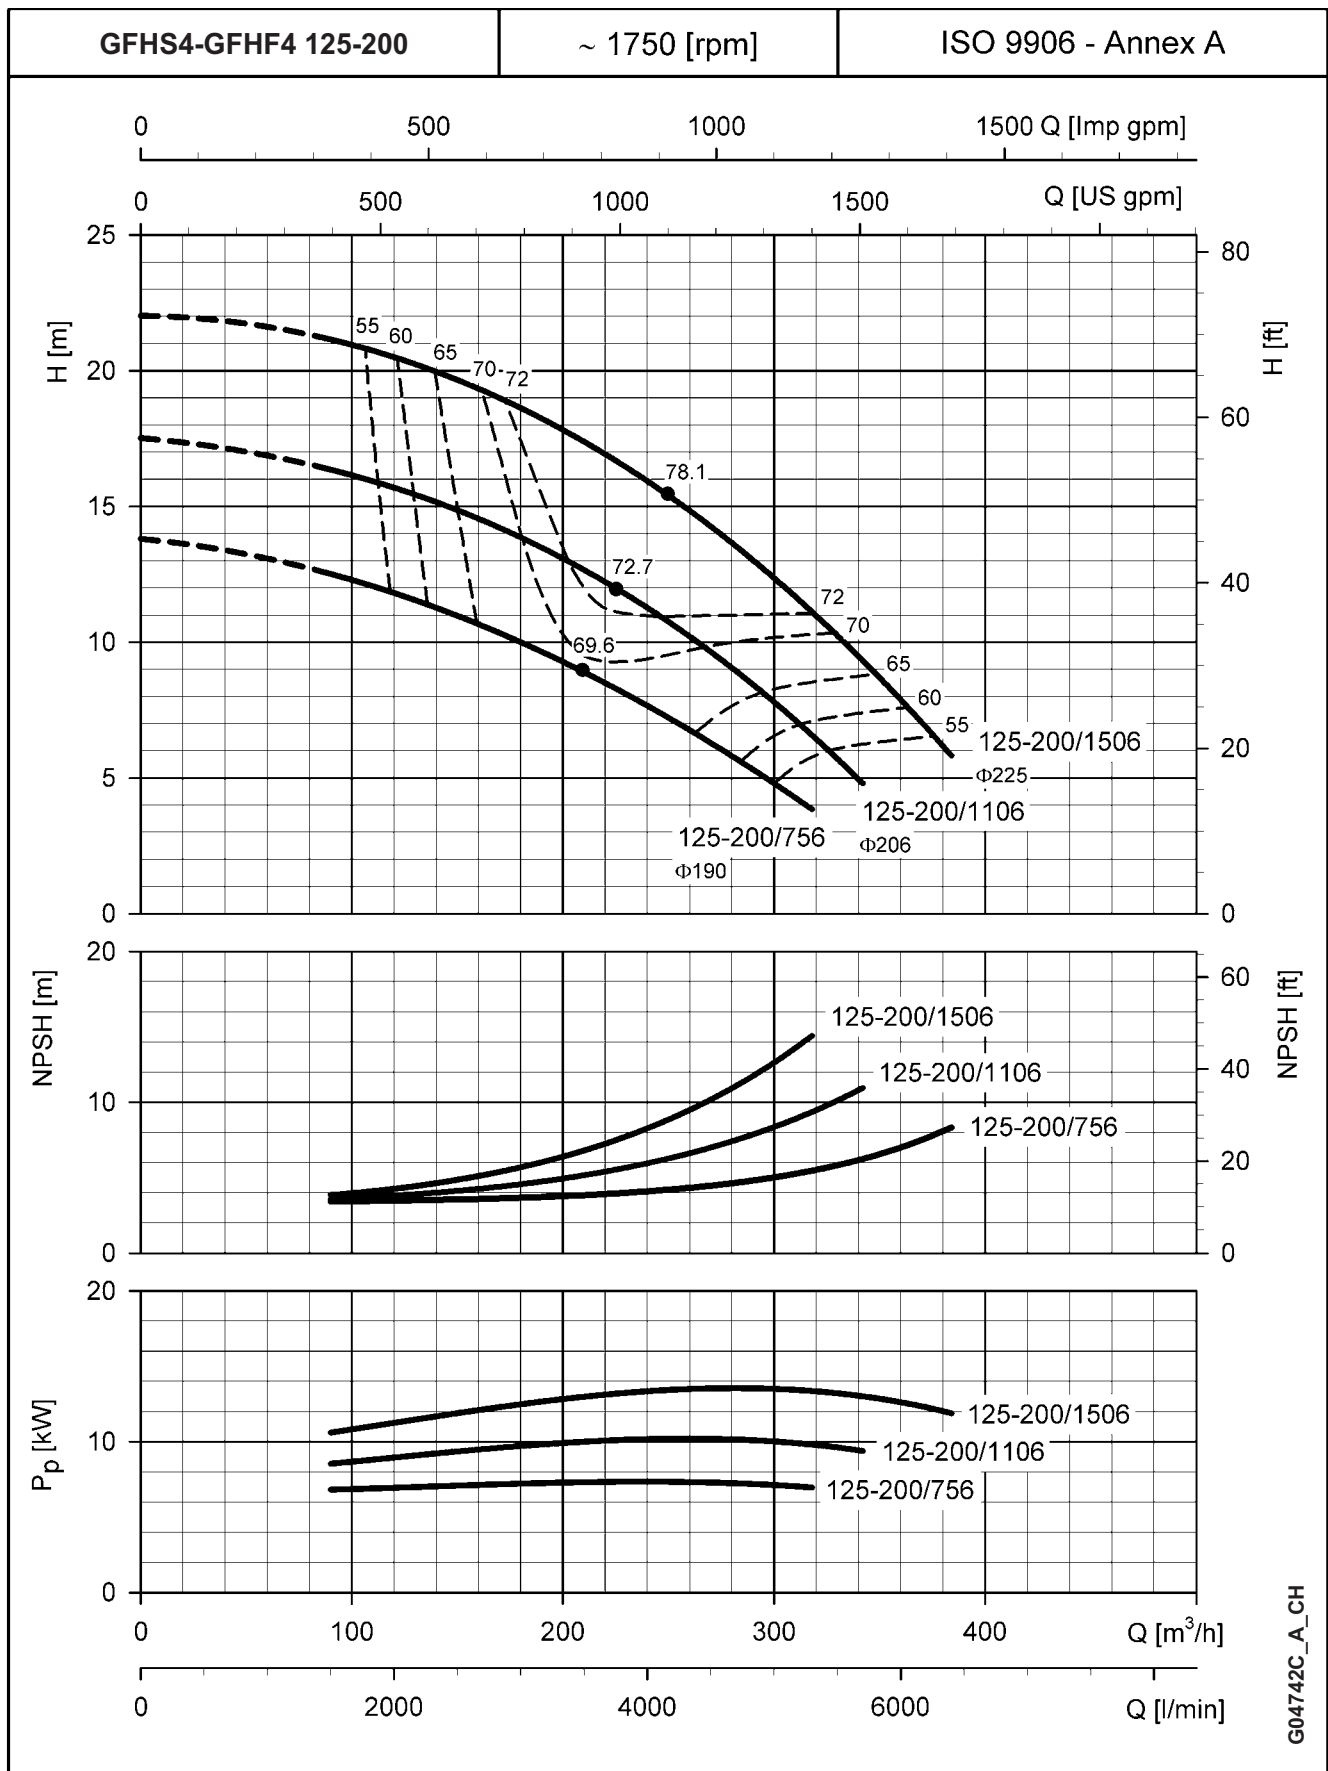


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHS4-GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

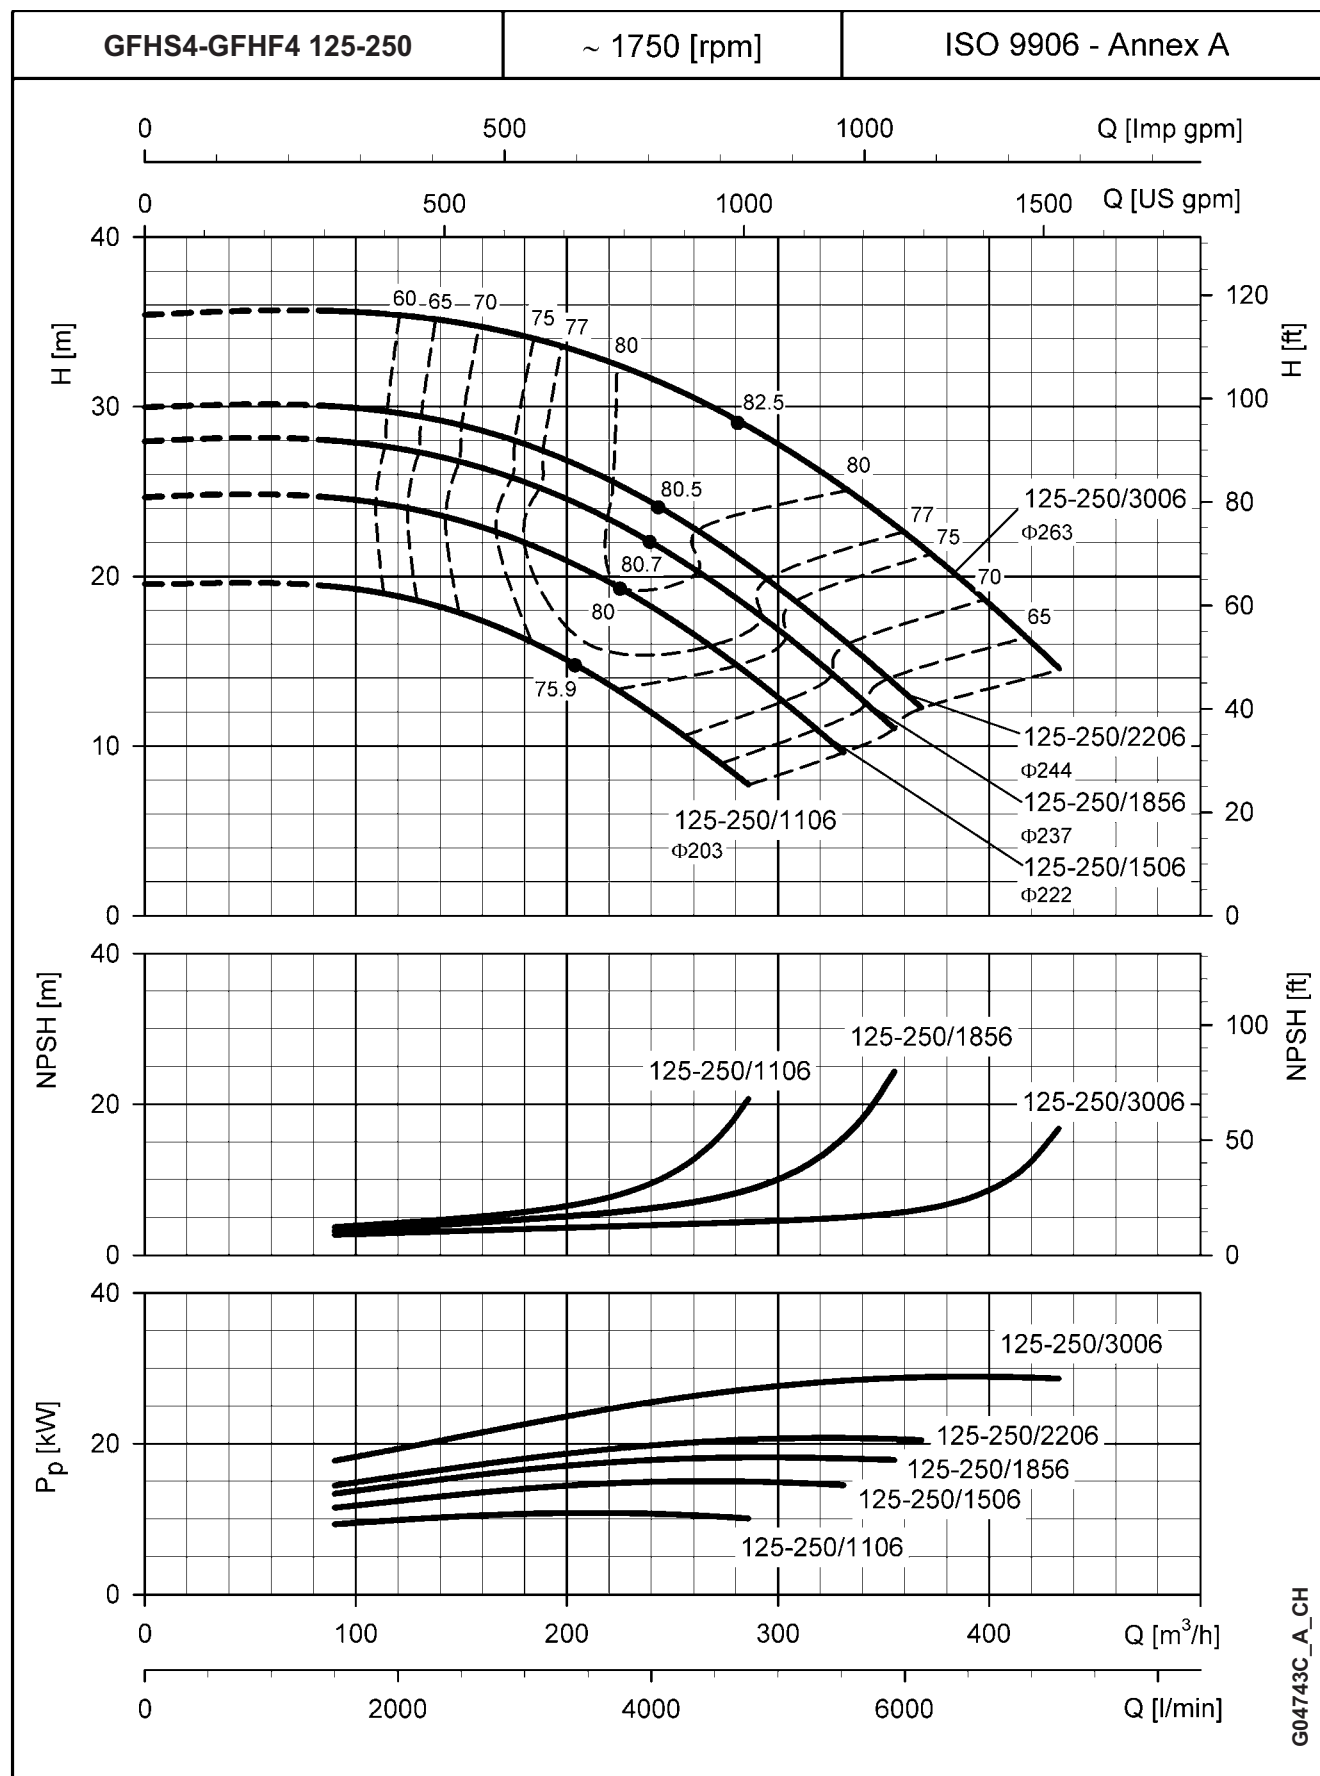


The NPSH values are laboratory values: for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHS4-GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

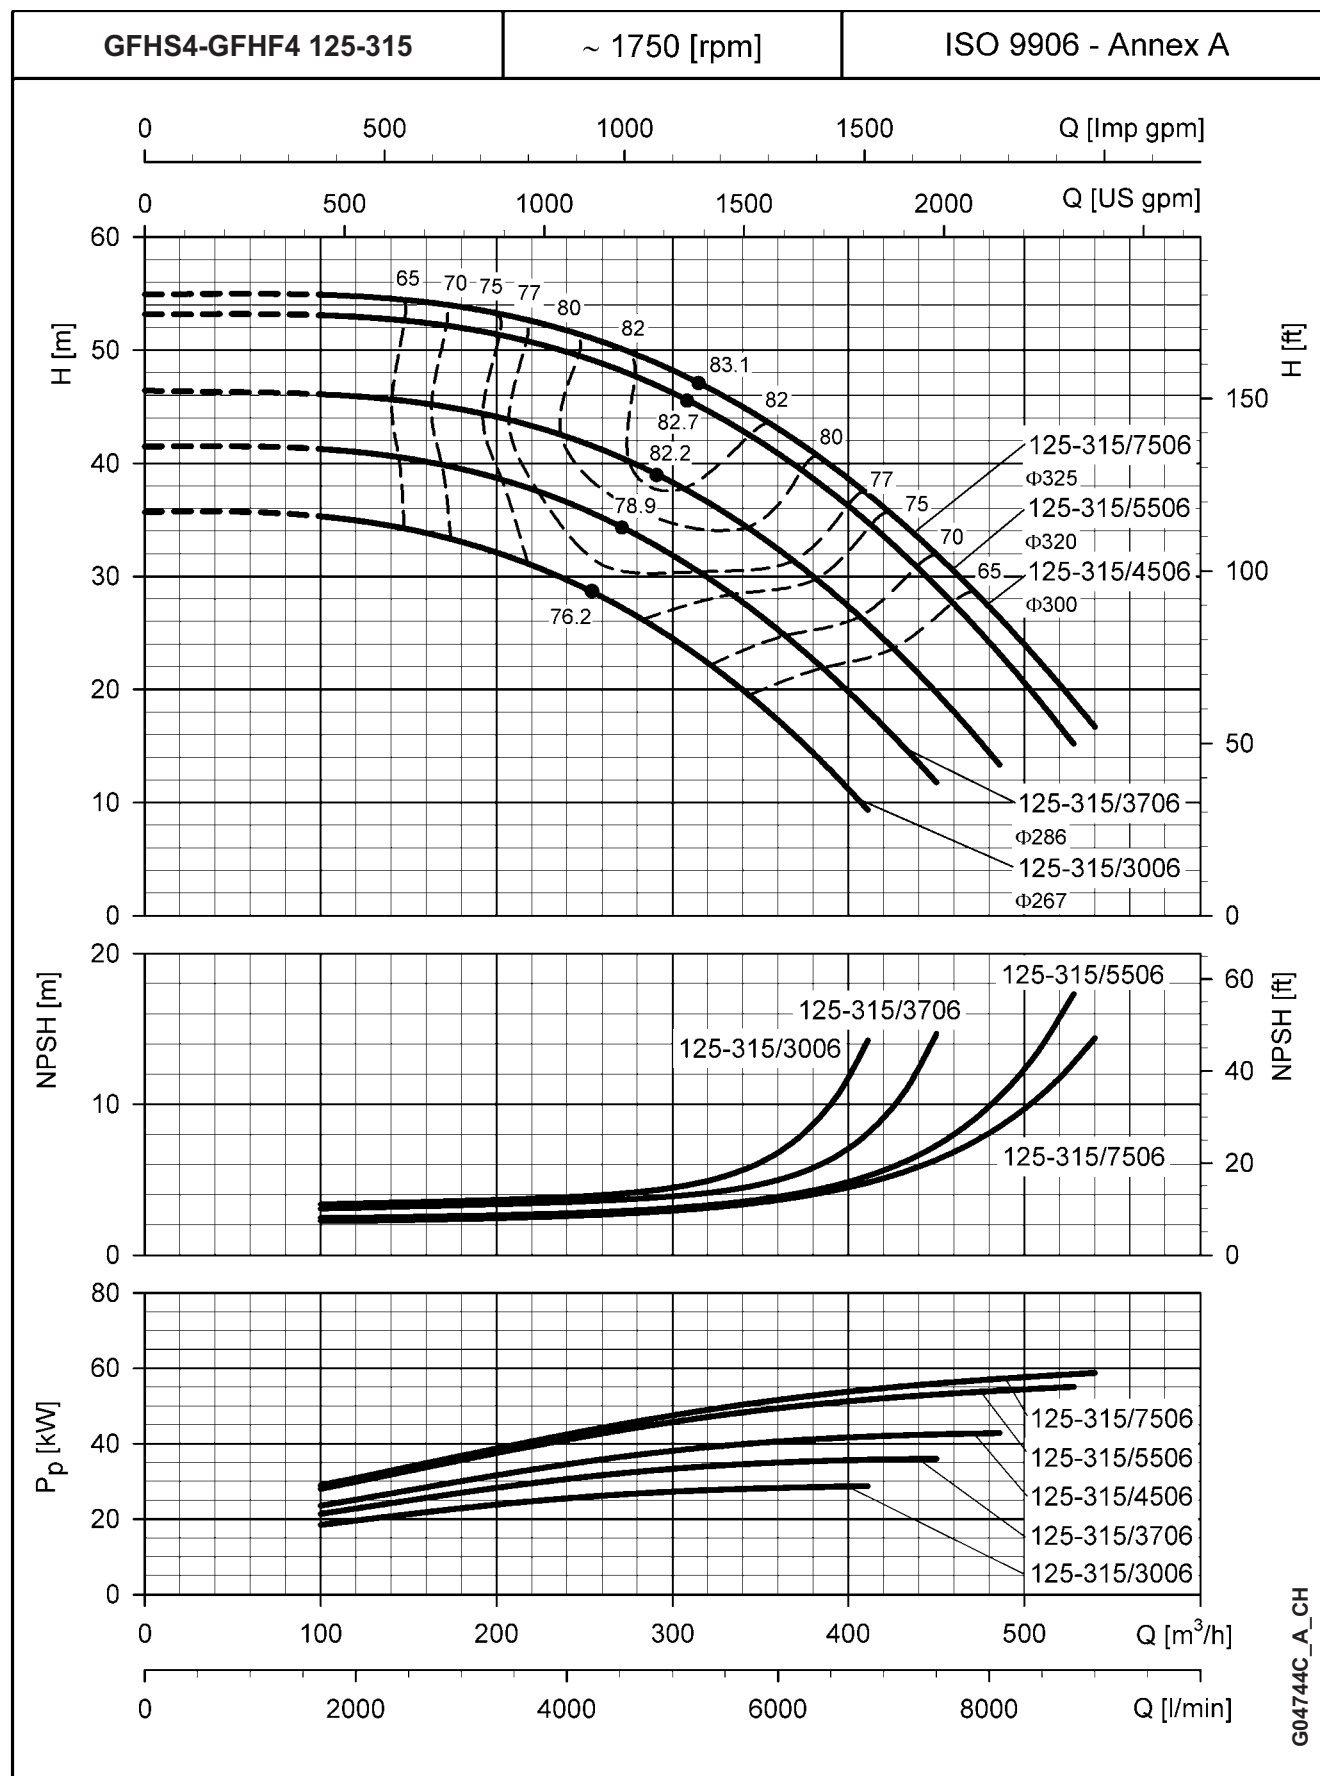


The NPSH values are laboratory values: for practical use we suggest increasing these values by 0,5 m.
 These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHF4 SERIES OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES

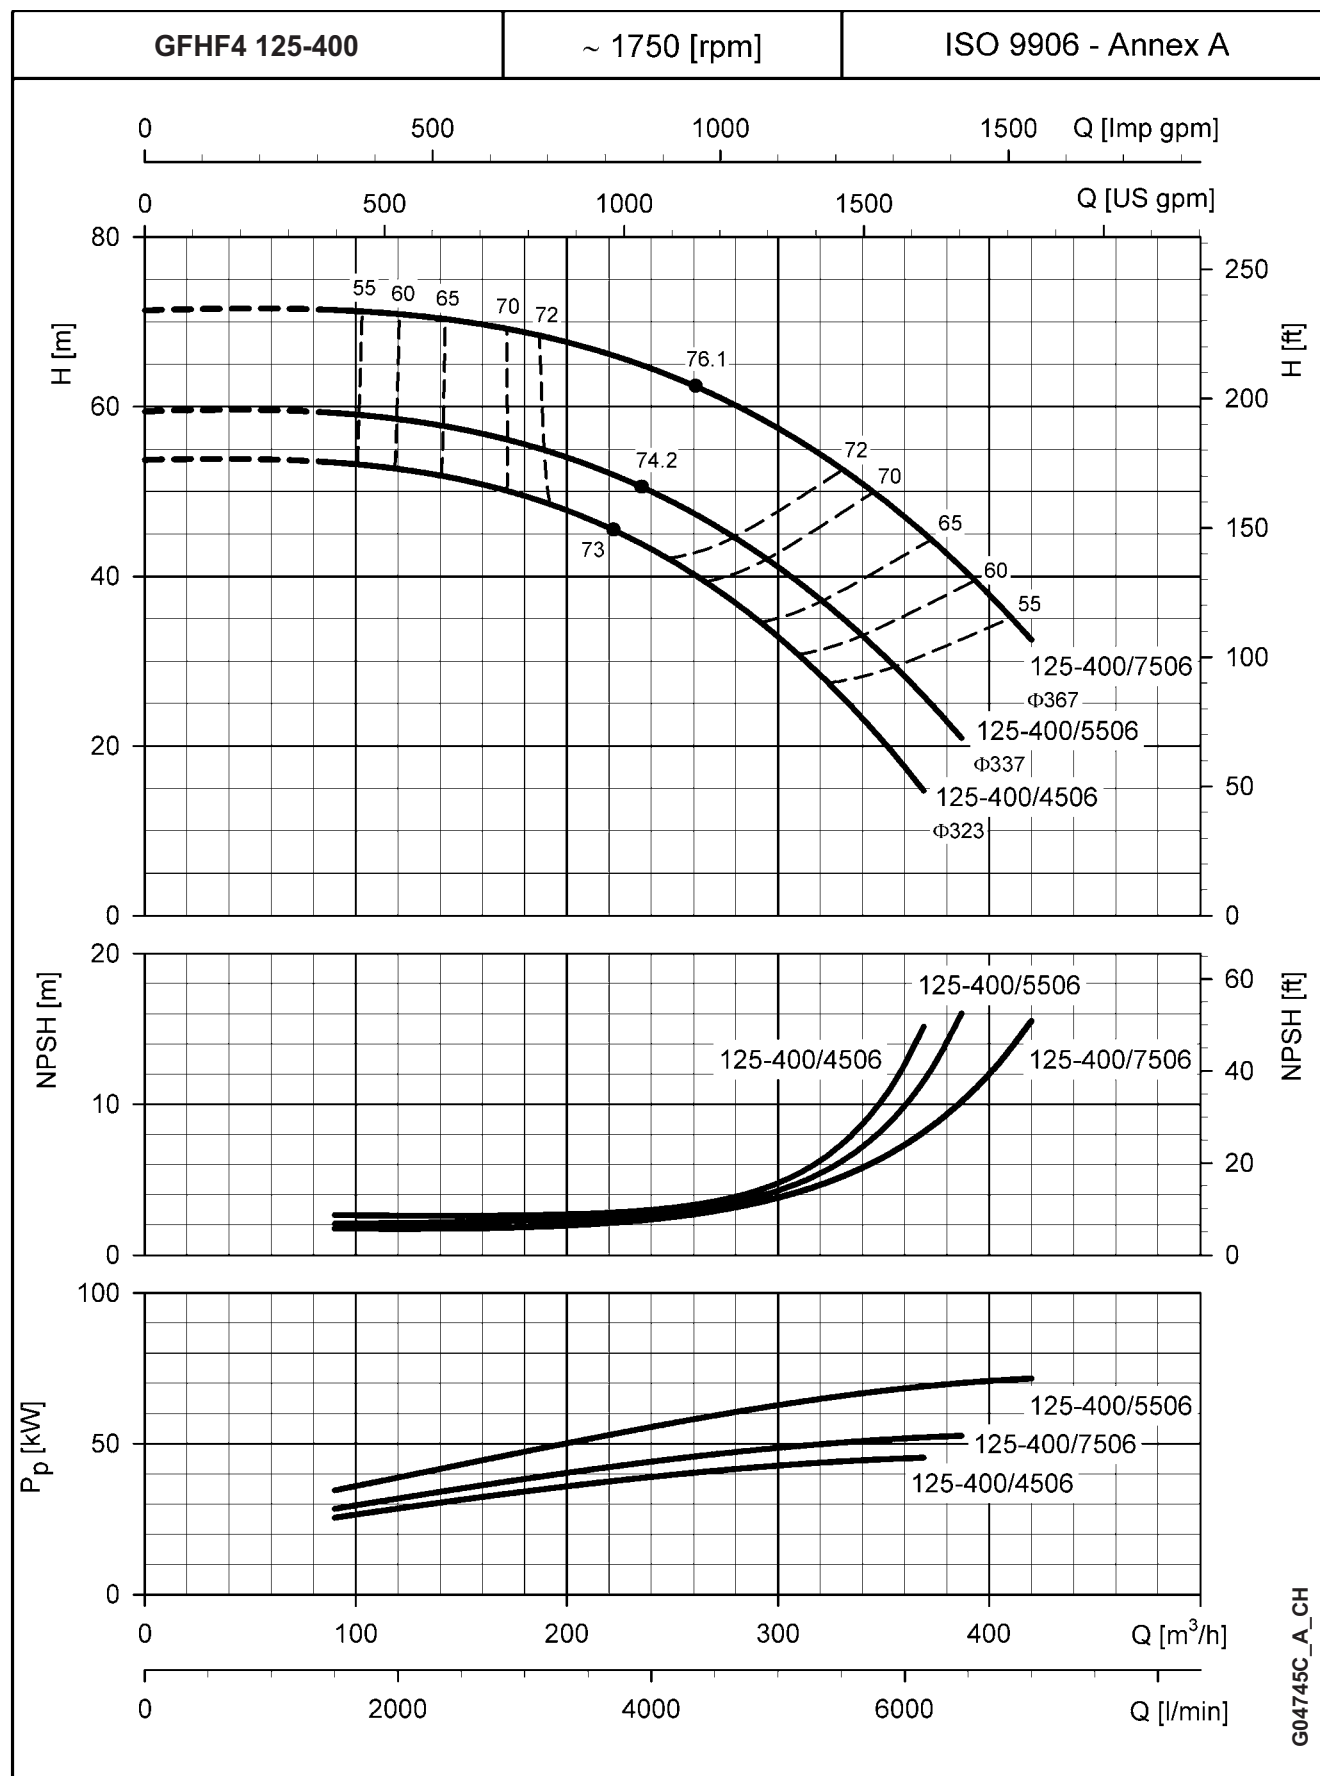


The NPSH values are laboratory values: for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHS4-GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

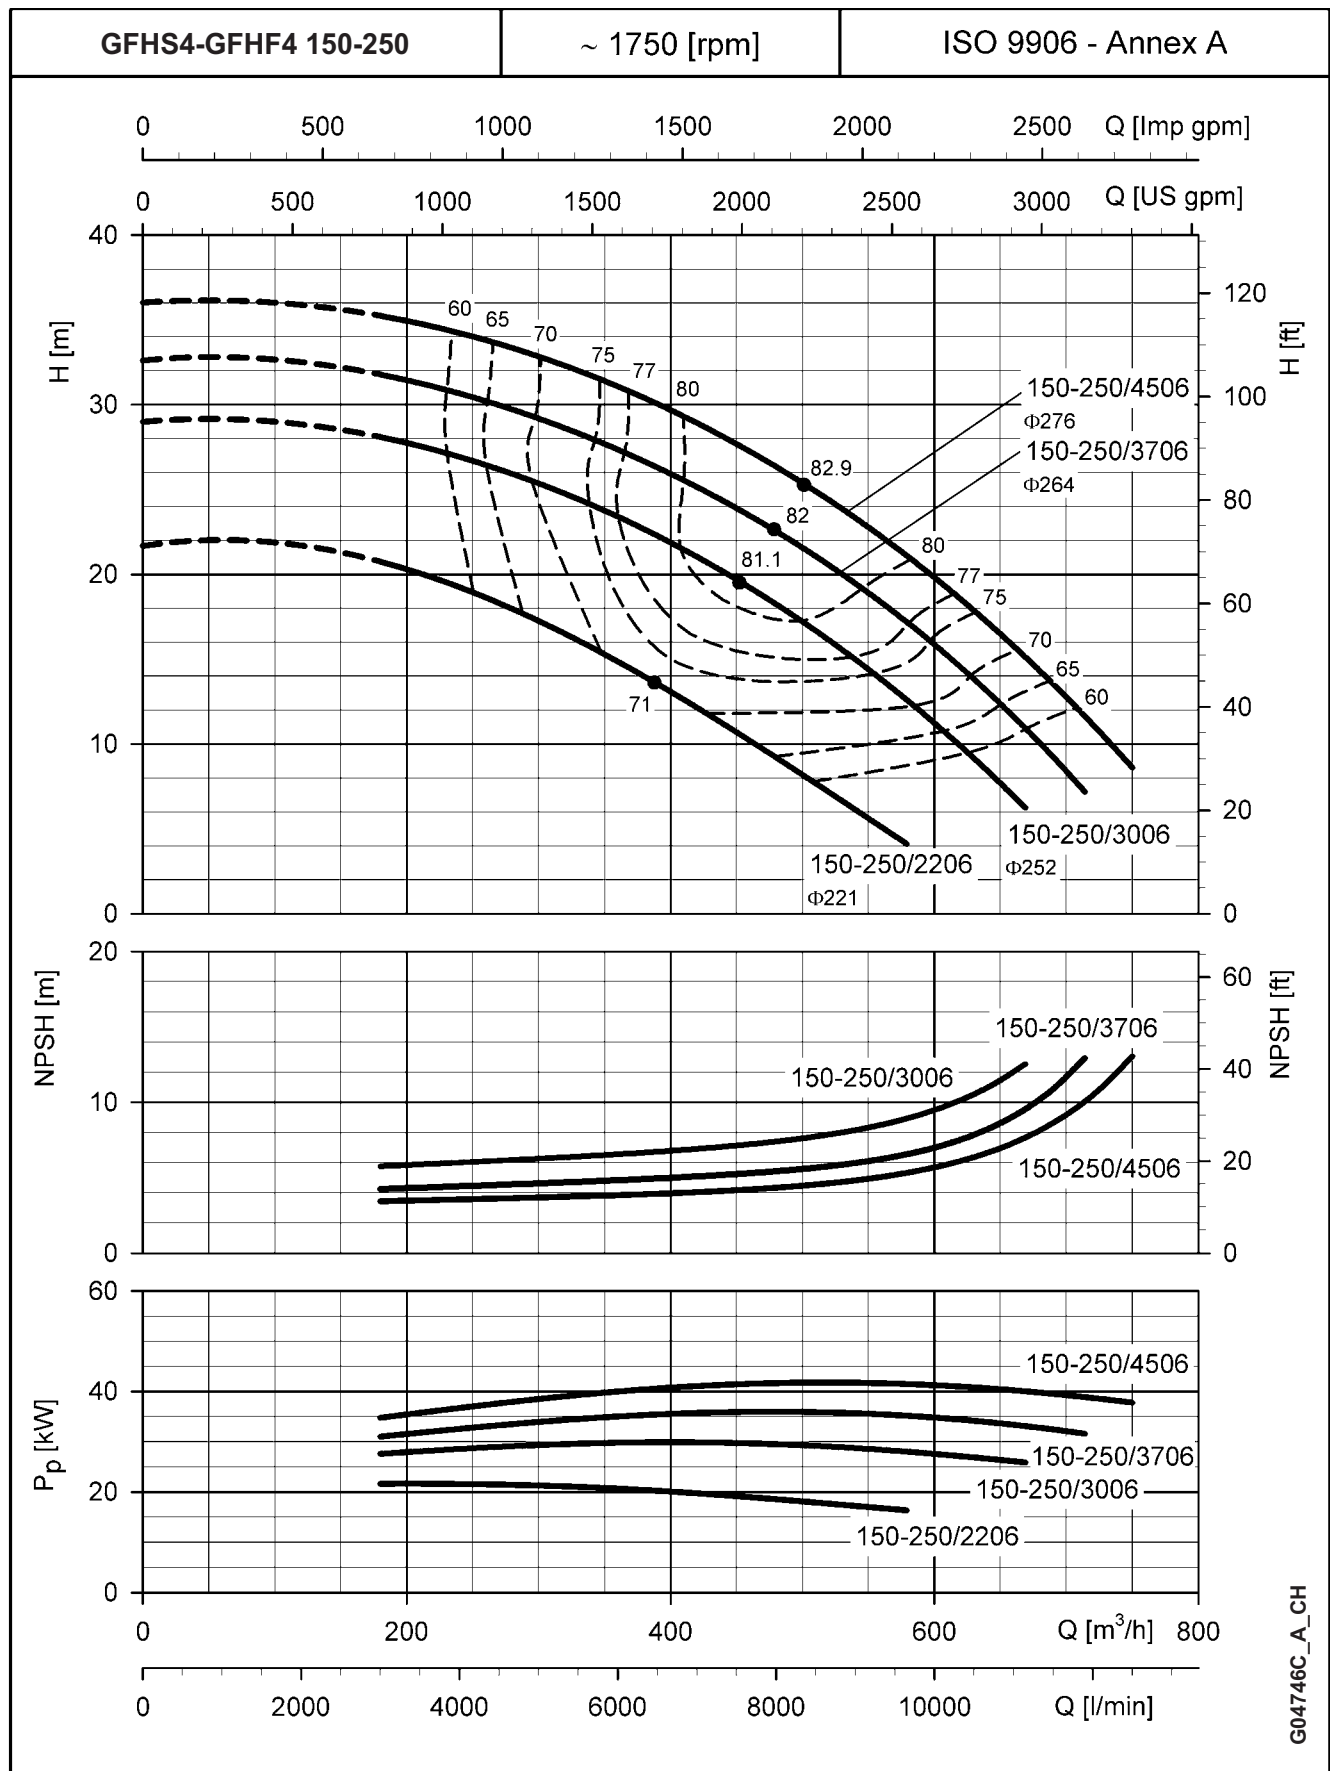


The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

GFHF4 SERIES OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES

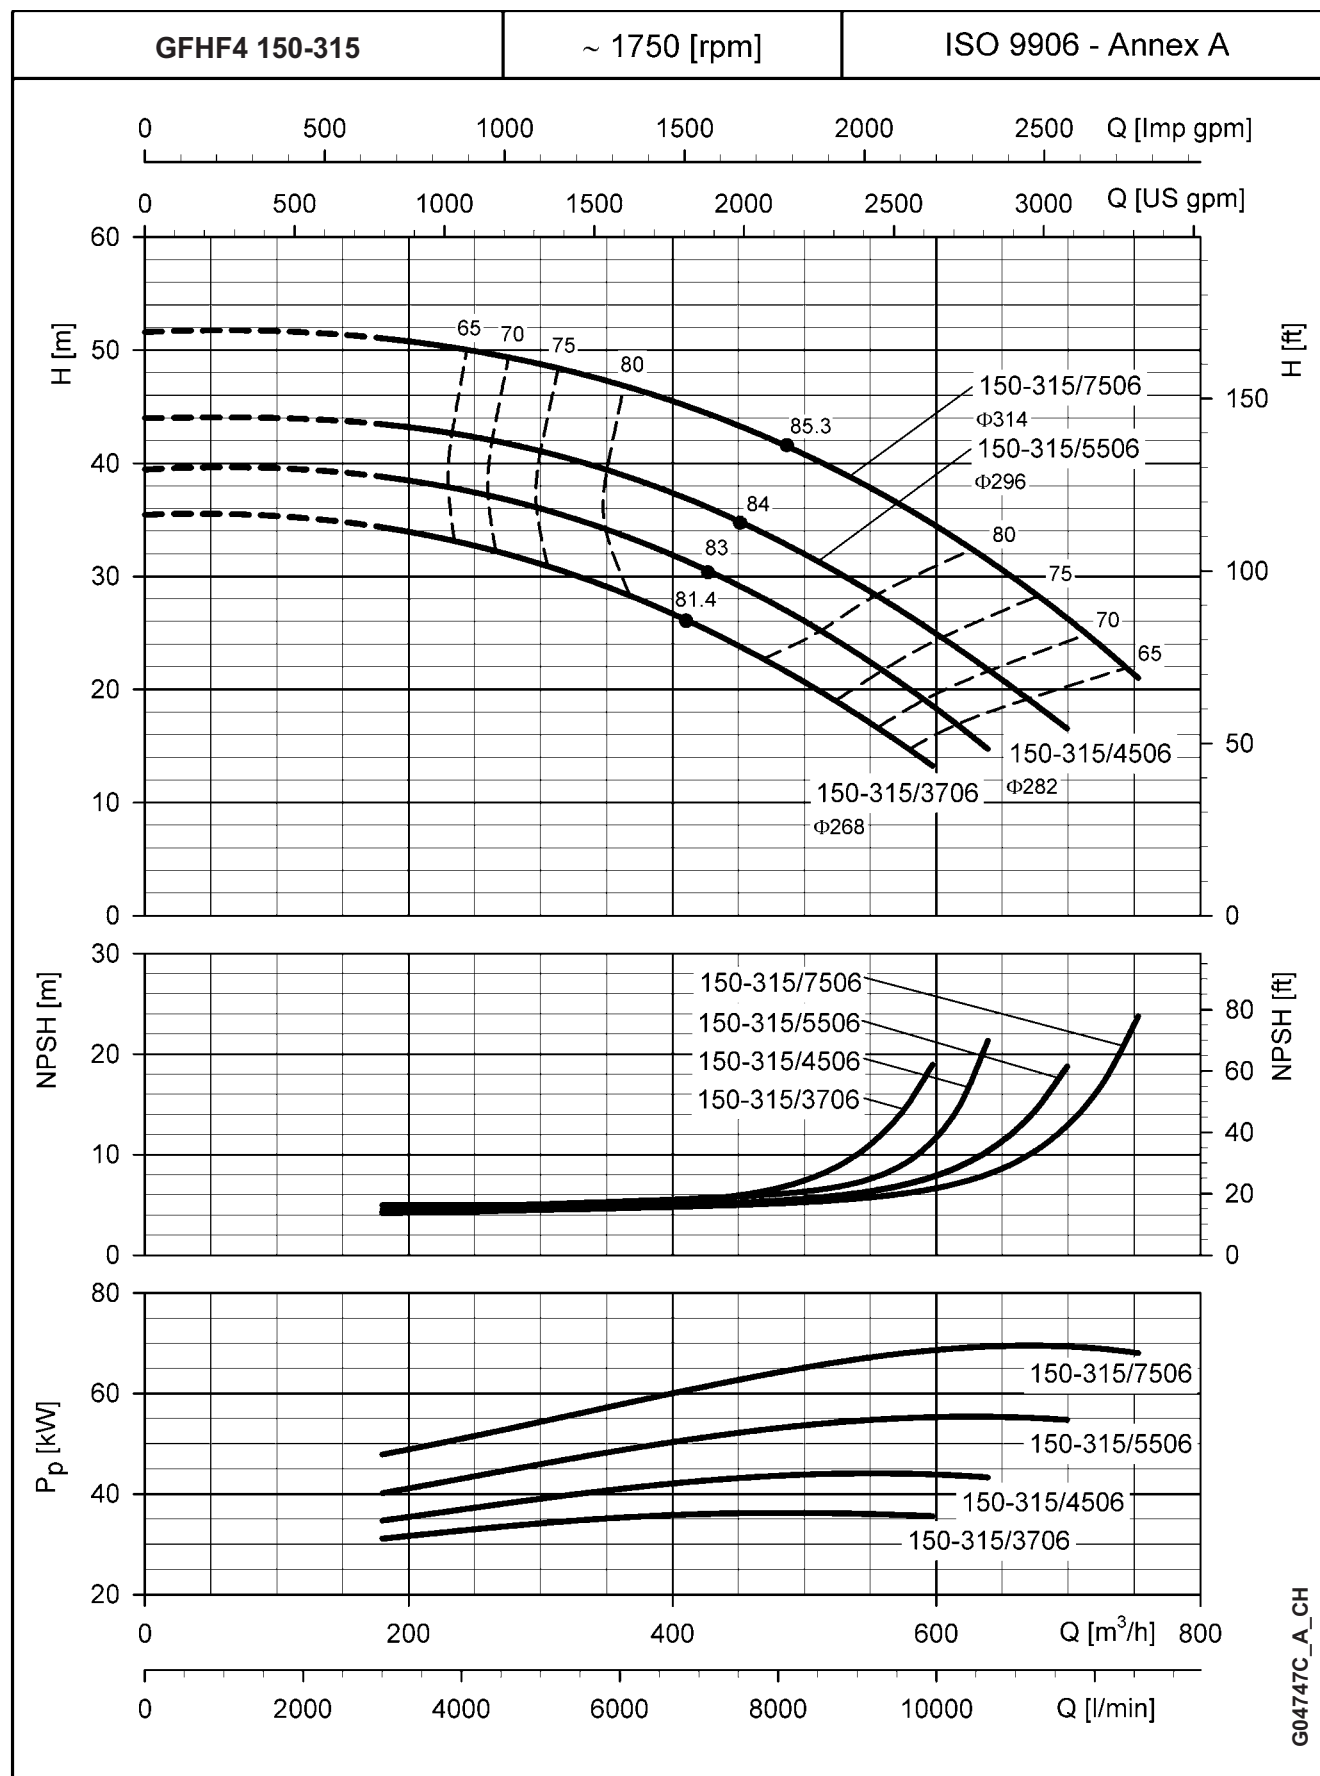

The NPSH values are laboratory values; for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.


GFHF4 SERIES **OPERATING CHARACTERISTICS AT 60 Hz, 4 POLES**

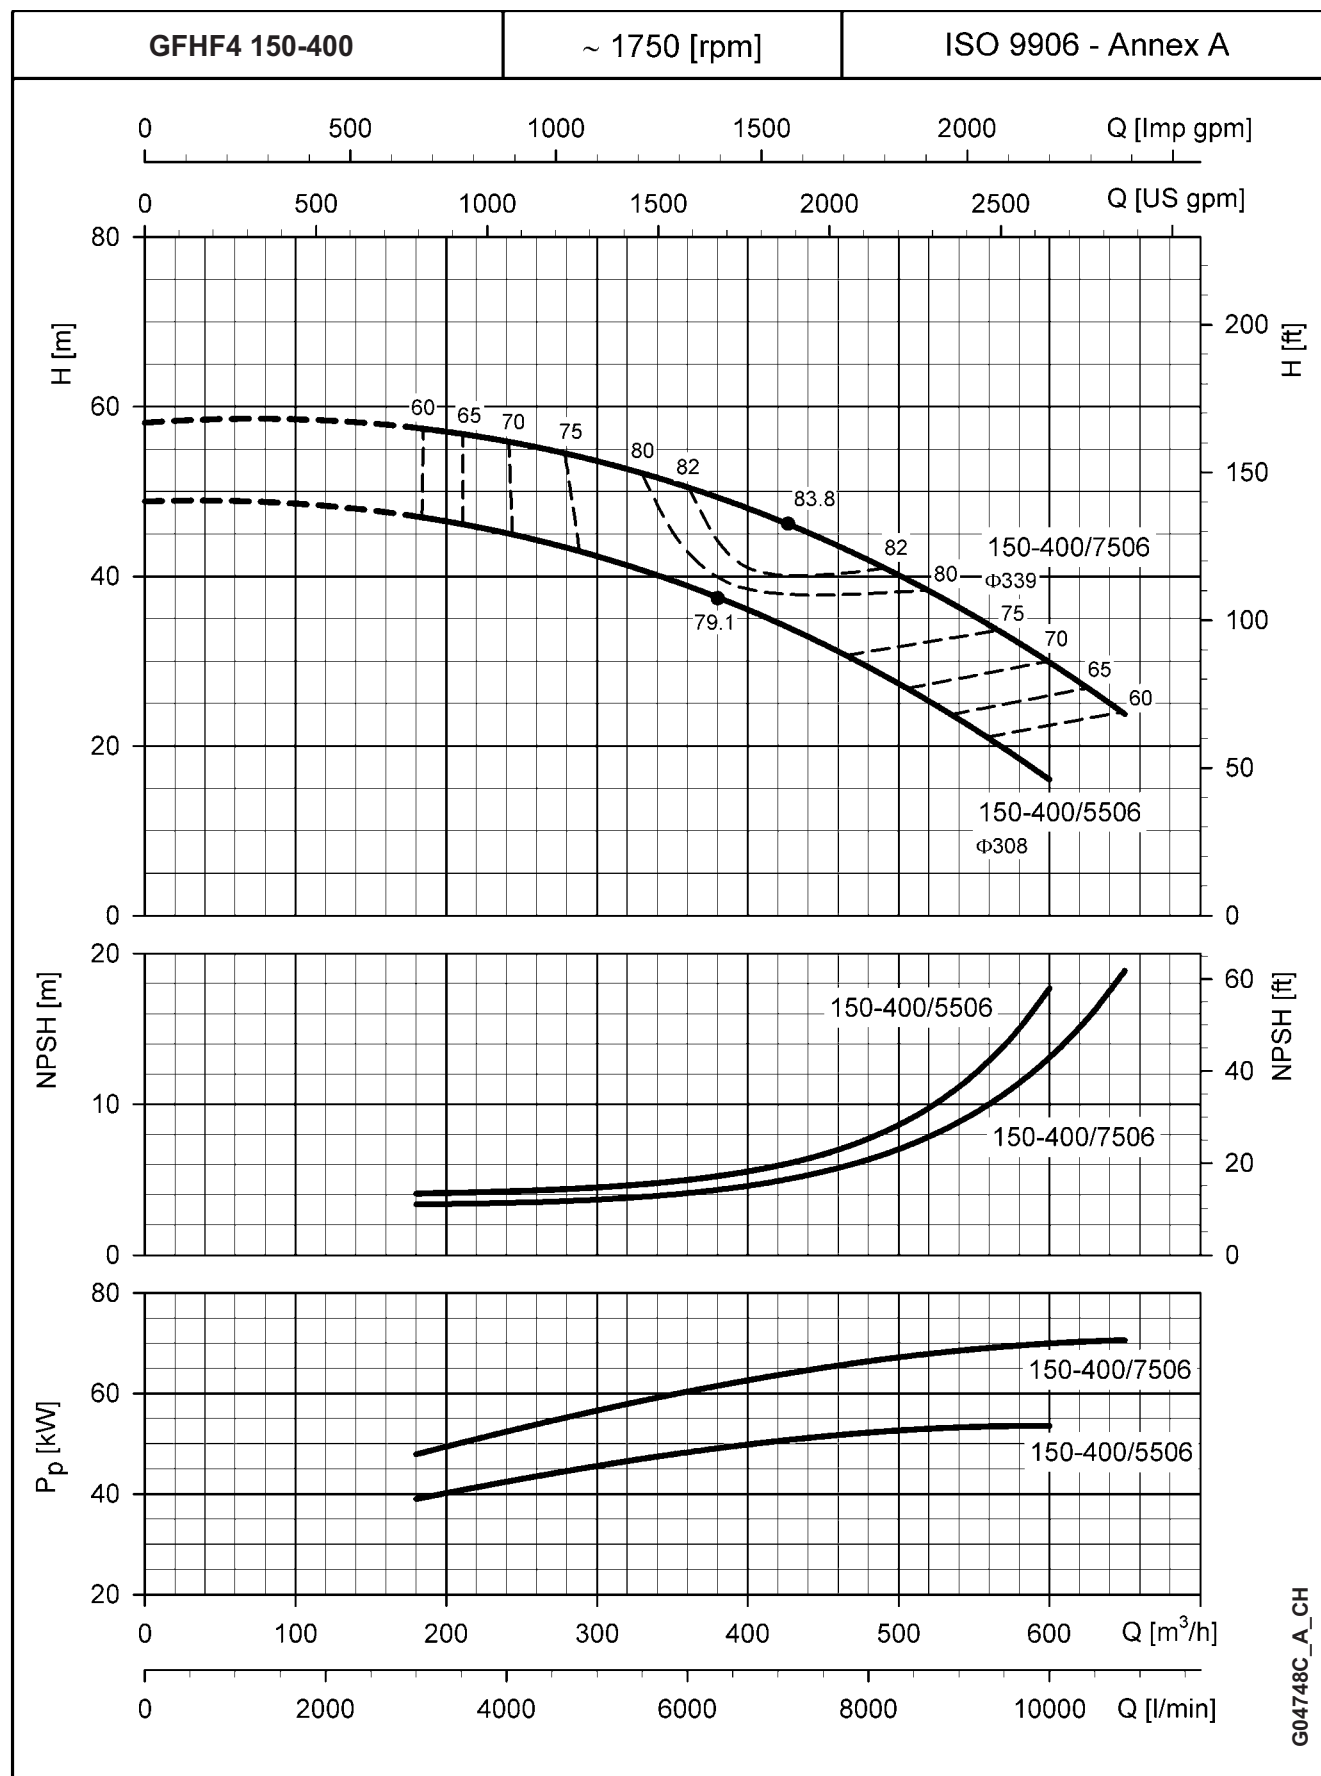

The NPSH values are laboratory values: for practical use we suggest increasing these values by 0,5 m.
These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.

DIMENSIONS AND WEIGHTS

GFHE SERIES DIMENSIONS AND WEIGHTS AT 60 Hz, 2 POLES

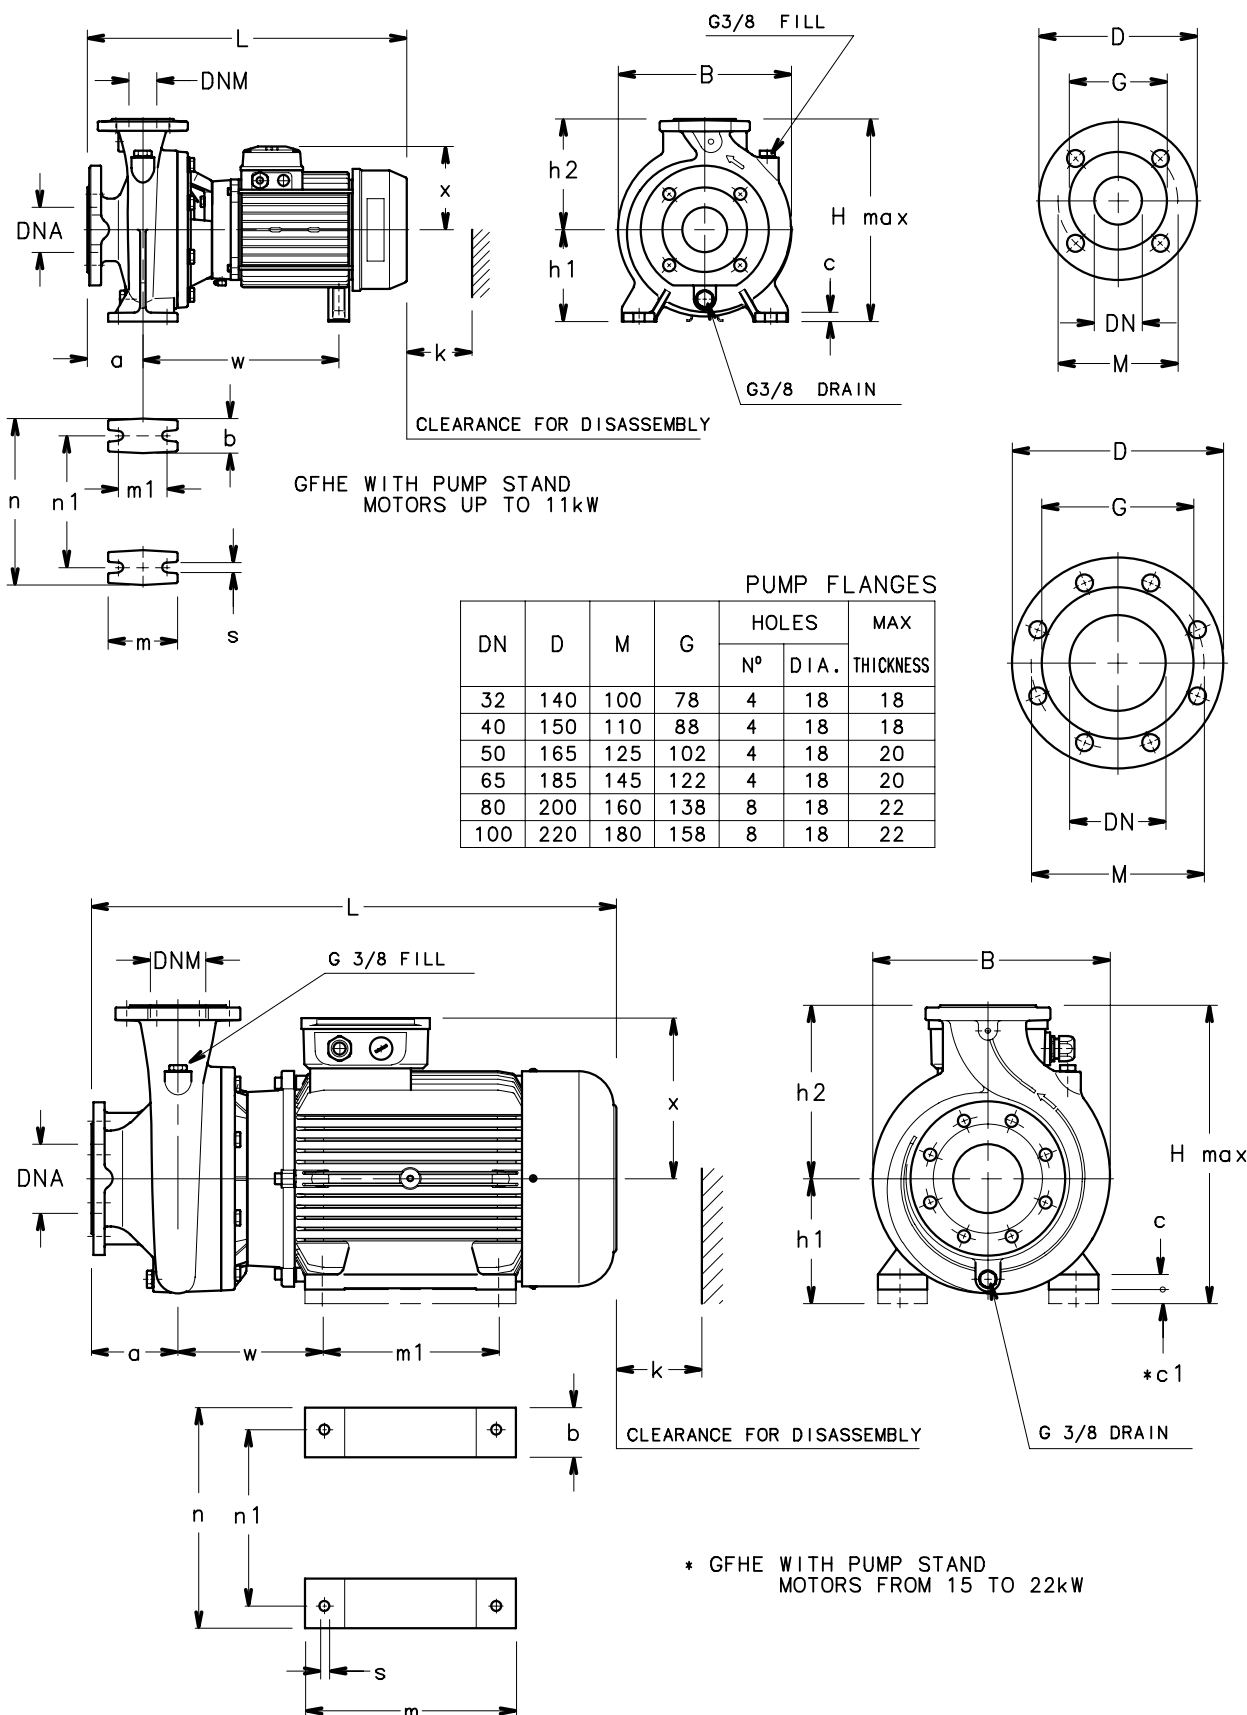

GO4703D-EN_D_DD

GFHE SERIES


DIMENSIONS AND WEIGHTS AT 60 Hz, 2 POLES

PUMP TYPE	DIMENSIONS (mm)															B	H	L	k	WEIGHT
	PUMP						STAND													
	DNM	DNA	a	h2	w	x	b	c	*c1	h1	m	m1	n	n1	s					
GFHE 32-125/116/D	32	50	80	140	235	129	50	12	-	112	100	70	190	140	14	233	252	443	86	29,6
GFHE 32-160/156/D	32	50	80	160	235	129	50	12	-	132	100	70	240	190	14	235	292	443	86	32,4
GFHE 32-160/226/C	32	50	80	160	245	134	50	12	-	132	100	70	240	190	14	235	292	478	86	39
GFHE 32-200/306/P	32	50	80	180	245	134	50	12	-	160	100	70	240	190	14	285	340	478	86	47
GFHE 32-200/406/P	32	50	80	180	273	154	50	12	-	160	100	70	240	190	14	285	340	499	86	54
GFHE 40-125/156/D	40	65	80	140	235	129	50	12	-	112	100	70	210	160	14	233	252	443	88	32,4
GFHE 40-125/226/C	40	65	80	140	245	134	50	12	-	112	100	70	210	160	14	233	252	478	88	38
GFHE 40-160/306/P	40	65	80	160	245	134	50	12	-	132	100	70	240	190	14	250	292	478	88	40
GFHE 40-160/406/P	40	65	80	160	273	154	50	12	-	132	100	70	240	190	14	250	292	499	88	47
GFHE 40-200/556/P	40	65	100	180	285	168	50	12	-	160	100	70	265	212	14	285	340	553	88	62
GFHE 40-200/756/P	40	65	100	180	305	191	50	12	-	160	100	70	265	212	14	285	351	567	88	79
GFHE 40-250/926/P	40	65	100	225	343	191	65	14	-	180	125	95	320	250	14	335	405	605	107	96
GFHE 40-250/1106/P	40	65	100	225	343	191	65	14	-	180	125	95	320	250	14	335	405	605	107	104
GFHE 40-250/1506/P	40	65	100	225	208	240	49	5	20	180	304	210	304	254	15	335	420	694	107	128
GFHE 50-125/306/P	50	65	100	160	247	134	50	12	-	132	100	70	240	190	14	255	292	500	92	43
GFHE 50-125/406/P	50	65	100	160	275	154	50	12	-	132	100	70	240	190	14	255	292	521	92	50
GFHE 50-160/556/P	50	65	100	180	287	168	50	12	-	160	100	70	265	212	14	285	340	555	92	71
GFHE 50-160/756/P	50	65	100	180	307	191	50	12	-	160	100	70	265	212	14	285	351	569	92	87
GFHE 50-200/926/P	50	65	100	200	345	191	50	12	-	160	100	70	265	212	14	305	360	607	92	86
GFHE 50-200/1106/P	50	65	100	200	345	191	50	12	-	160	100	70	265	212	14	305	360	607	92	91
GFHE 50-250/1506/P	50	65	100	225	208	240	49	5	20	180	304	210	304	254	15	340	420	694	107	128
GFHE 50-250/1856/P	50	65	100	225	208	240	49	5	20	180	304	254	304	254	15	340	420	694	107	131
GFHE 50-250/2206/P	50	65	100	225	208	240	49	5	20	180	304	254	304	254	15	340	420	694	107	151
GFHE 65-125/556/P	65	80	100	180	287	168	65	14	-	160	125	95	280	212	14	285	340	555	105	75
GFHE 65-125/756/P	65	80	100	180	307	191	65	14	-	160	125	95	280	212	14	285	351	569	105	91
GFHE 65-160/926/P	65	80	100	200	343	191	65	14	-	160	125	95	280	212	14	331	360	605	112	100
GFHE 65-160/1106/P	65	80	100	200	343	191	65	14	-	160	125	95	280	212	14	331	360	605	112	108
GFHE 65-160/1506/P	65	80	100	200	208	240	49	5	-	160	304	210	304	254	15	331	400	694	112	132
GFHE 65-200/1856/P	65	80	100	225	208	240	49	5	20	180	304	254	304	254	15	335	420	694	112	135
GFHE 65-200/2206/P	65	80	100	225	208	240	49	5	20	180	304	254	304	254	15	335	420	694	112	155
GFHE 65-250/2206/P	65	80	100	250	208	240	49	5	40	200	304	254	304	254	15	332	450	694	112	161
GFHE 80-160/1506/P	80	100	125	225	208	240	49	5	20	180	304	210	304	254	15	332	420	719	129	138
GFHE 80-160/1856/P	80	100	125	225	208	240	49	5	20	180	304	254	304	254	15	332	420	719	129	141
GFHE 80-200/2206/P	80	100	125	250	208	240	49	5	20	180	304	254	304	254	15	332	430	719	129	161

* Motor shim on request

gfh-gfhe-2p60-en_d_td

GFHE4 SERIES DIMENSIONS AND WEIGHTS AT 60 Hz, 4 POLES

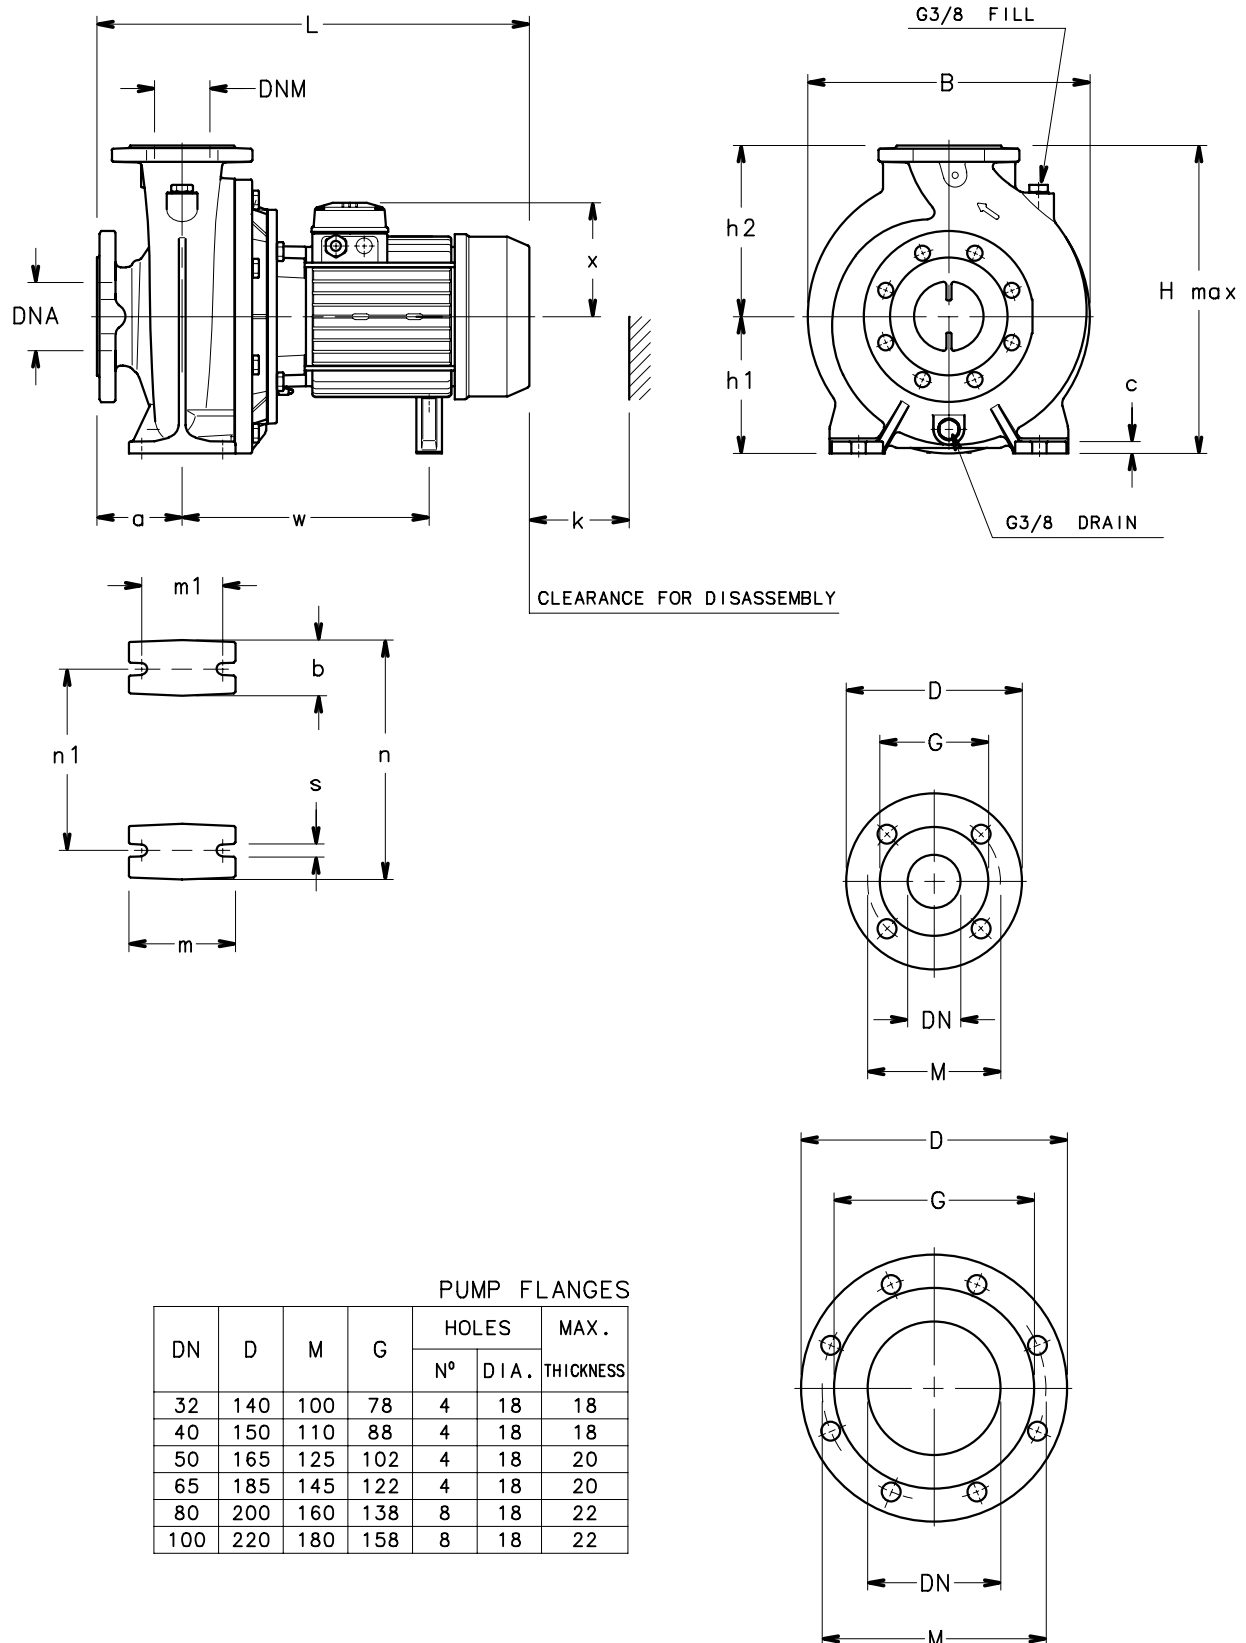

04704D-EN_B_DD


GFHE4 SERIES

DIMENSIONS AND WEIGHTS AT 60 Hz, 4 POLES

PUMP TYPE	DIMENSIONS (mm)														B	H	L	k	WEIGHT
	PUMP						STAND												
	DNM	DNA	a	h2	w	x	b	c	h1	m	m1	n	n1	s					
GFHE4 32-125/026/A	32	50	80	140	215	121	50	12	112	100	70	190	140	14	233	252	411	86	25
GFHE4 32-160/026/A	32	50	80	160	215	121	50	12	132	100	70	240	190	14	235	292	411	86	26
GFHE4 32-160/036/A	32	50	80	160	215	121	50	12	132	100	70	240	190	14	235	292	411	86	26
GFHE4 32-200/036/A	32	50	80	180	215	121	50	12	160	100	70	240	190	14	285	340	411	86	35
GFHE4 32-200/056/A	32	50	80	180	235	129	50	12	160	100	70	240	190	14	285	340	443	86	38
GFHE4 40-125/026/A	40	65	80	140	215	121	50	12	112	100	70	210	160	14	233	252	411	88	25
GFHE4 40-125/036/A	40	65	80	140	215	121	50	12	112	100	70	210	160	14	233	252	411	88	25
GFHE4 40-160/036/A	40	65	80	160	215	121	50	12	132	100	70	240	190	14	250	292	411	88	27
GFHE4 40-160/056/A	40	65	80	160	235	129	50	12	132	100	70	240	190	14	250	292	443	88	29
GFHE4 40-200/076/C	40	65	100	180	-	128	50	12	160	100	70	265	212	14	285	340	431	88	40
GFHE4 40-200/116/P	40	65	100	180	245	134	50	12	160	100	70	265	212	14	285	340	498	88	48
GFHE4 40-250/116/P	40	65	100	225	245	134	65	14	180	125	95	320	250	14	335	405	498	107	58
GFHE4 40-250/156/P	40	65	100	225	245	134	65	14	180	125	95	320	250	14	335	405	498	107	61
GFHE4 40-250/226/P	40	65	100	225	285	168	65	14	180	125	95	320	250	14	335	405	522	107	69
GFHE4 50-125/036/A	50	65	100	160	217	121	50	12	132	100	70	240	190	14	255	292	433	92	29
GFHE4 50-125/056/A	50	65	100	160	237	129	50	12	132	100	70	240	190	14	255	292	465	92	32
GFHE4 50-160/076/C	50	65	100	180	-	128	50	12	160	100	70	265	212	14	285	340	433	92	43
GFHE4 50-160/116/P	50	65	100	180	247	134	50	12	160	100	70	265	212	14	285	340	500	92	51
GFHE4 50-200/116/P	50	65	100	200	247	134	50	12	160	100	70	265	212	14	305	360	500	92	51
GFHE4 50-200/156/P	50	65	100	200	247	134	50	12	160	100	70	265	212	14	305	360	500	92	54
GFHE4 50-250/226A/P	50	65	100	225	285	168	65	14	180	125	95	320	250	14	340	405	522	107	69
GFHE4 50-250/226/P	50	65	100	225	285	168	65	14	180	125	95	320	250	14	340	405	522	107	69
GFHE4 50-250/306/P	50	65	100	225	285	168	65	14	180	125	95	320	250	14	340	405	553	107	72
GFHE4 65-125/076/C	65	80	100	180	-	128	65	14	160	125	95	280	212	14	285	340	433	105	47
GFHE4 65-125/116/P	65	80	100	180	247	134	65	14	160	125	95	280	212	14	285	340	500	105	55
GFHE4 65-160/116/P	65	80	100	200	245	134	65	14	160	125	95	280	212	14	331	360	498	112	61
GFHE4 65-160/156/P	65	80	100	200	245	134	65	14	160	125	95	280	212	14	331	360	498	112	65
GFHE4 65-160/226/P	65	80	100	200	285	168	65	14	160	125	95	280	212	14	331	360	522	112	73
GFHE4 65-200/226/P	65	80	100	225	285	168	65	14	180	125	95	320	250	14	335	405	522	112	73
GFHE4 65-200/306/P	65	80	100	225	285	168	65	14	180	125	95	320	250	14	335	405	553	112	75
GFHE4 65-250/306/P	65	80	100	250	285	168	80	16	200	160	120	360	280	18	360	450	553	112	84
GFHE4 65-250/406/P	65	80	100	250	315	168	80	16	200	160	120	360	280	18	360	450	598	112	125
GFHE4 65-250/556/P	65	80	100	250	343	191	80	16	200	160	120	360	280	18	360	450	605	112	130
GFHE4 80-160/156/P	80	100	125	225	245	134	65	14	180	125	95	320	250	14	332	405	523	129	70
GFHE4 80-160/226/P	80	100	125	225	285	168	65	14	180	125	95	320	250	14	332	405	547	129	78
GFHE4 80-200/306/P	80	100	125	250	285	168	65	14	180	125	95	345	280	14	345	430	578	129	89
GFHE4 80-200/406/P	80	100	125	250	315	168	65	14	180	125	95	345	280	14	345	430	623	129	123
GFHE4 80-250/406/P	80	100	125	280	315	168	80	16	200	160	120	400	315	18	400	480	623	129	120
GFHE4 80-250/556/P	80	100	125	280	343	191	80	16	200	160	120	400	315	18	400	480	630	129	125
GFHE4 80-250/756/P	80	100	125	280	343	191	80	16	200	160	120	400	315	18	400	480	630	129	129

gfh-gfhe4-4p60-en_d_td

2GFHE SERIES DIMENSIONS AND WEIGHTS AT 60 Hz, 2 POLES

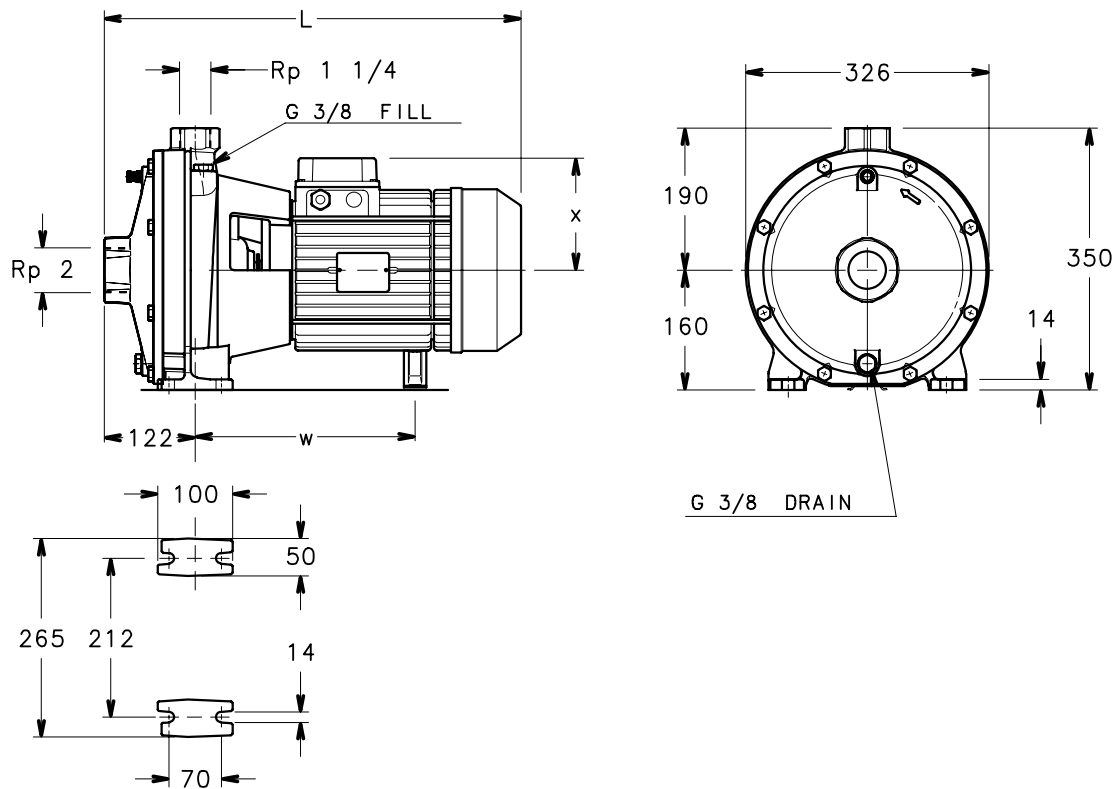


04733D-EN_C_DD

PUMP TYPE	DIMENSIONS (mm)			WEIGHT kg
	L	w	x	
2GFHE 32-250/556/P	572	282	168	74
2GFHE 32-250/756/P	607	323	191	90

2gfhc-2p60-en_c_td

2GFHE4 SERIES DIMENSIONS AND WEIGHTS AT 60 Hz, 4 POLES

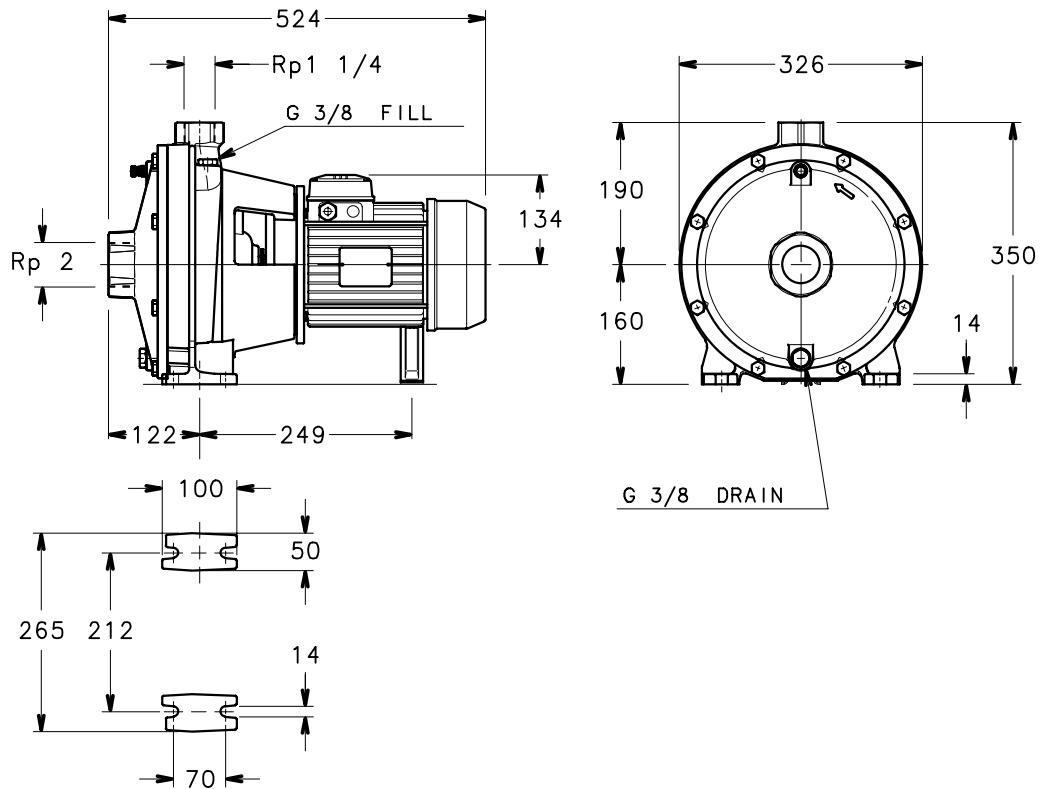


04734D-EN_C_DD

PUMP TYPE	WEIGHT kg
2GFHE4 32-250/076/P	53
2GFHE4 32-250/116/P	55

2gfhe4-4p60-en_c_td

GFHS SERIES DIMENSIONS AND WEIGHTS AT 60 Hz, 2 POLES

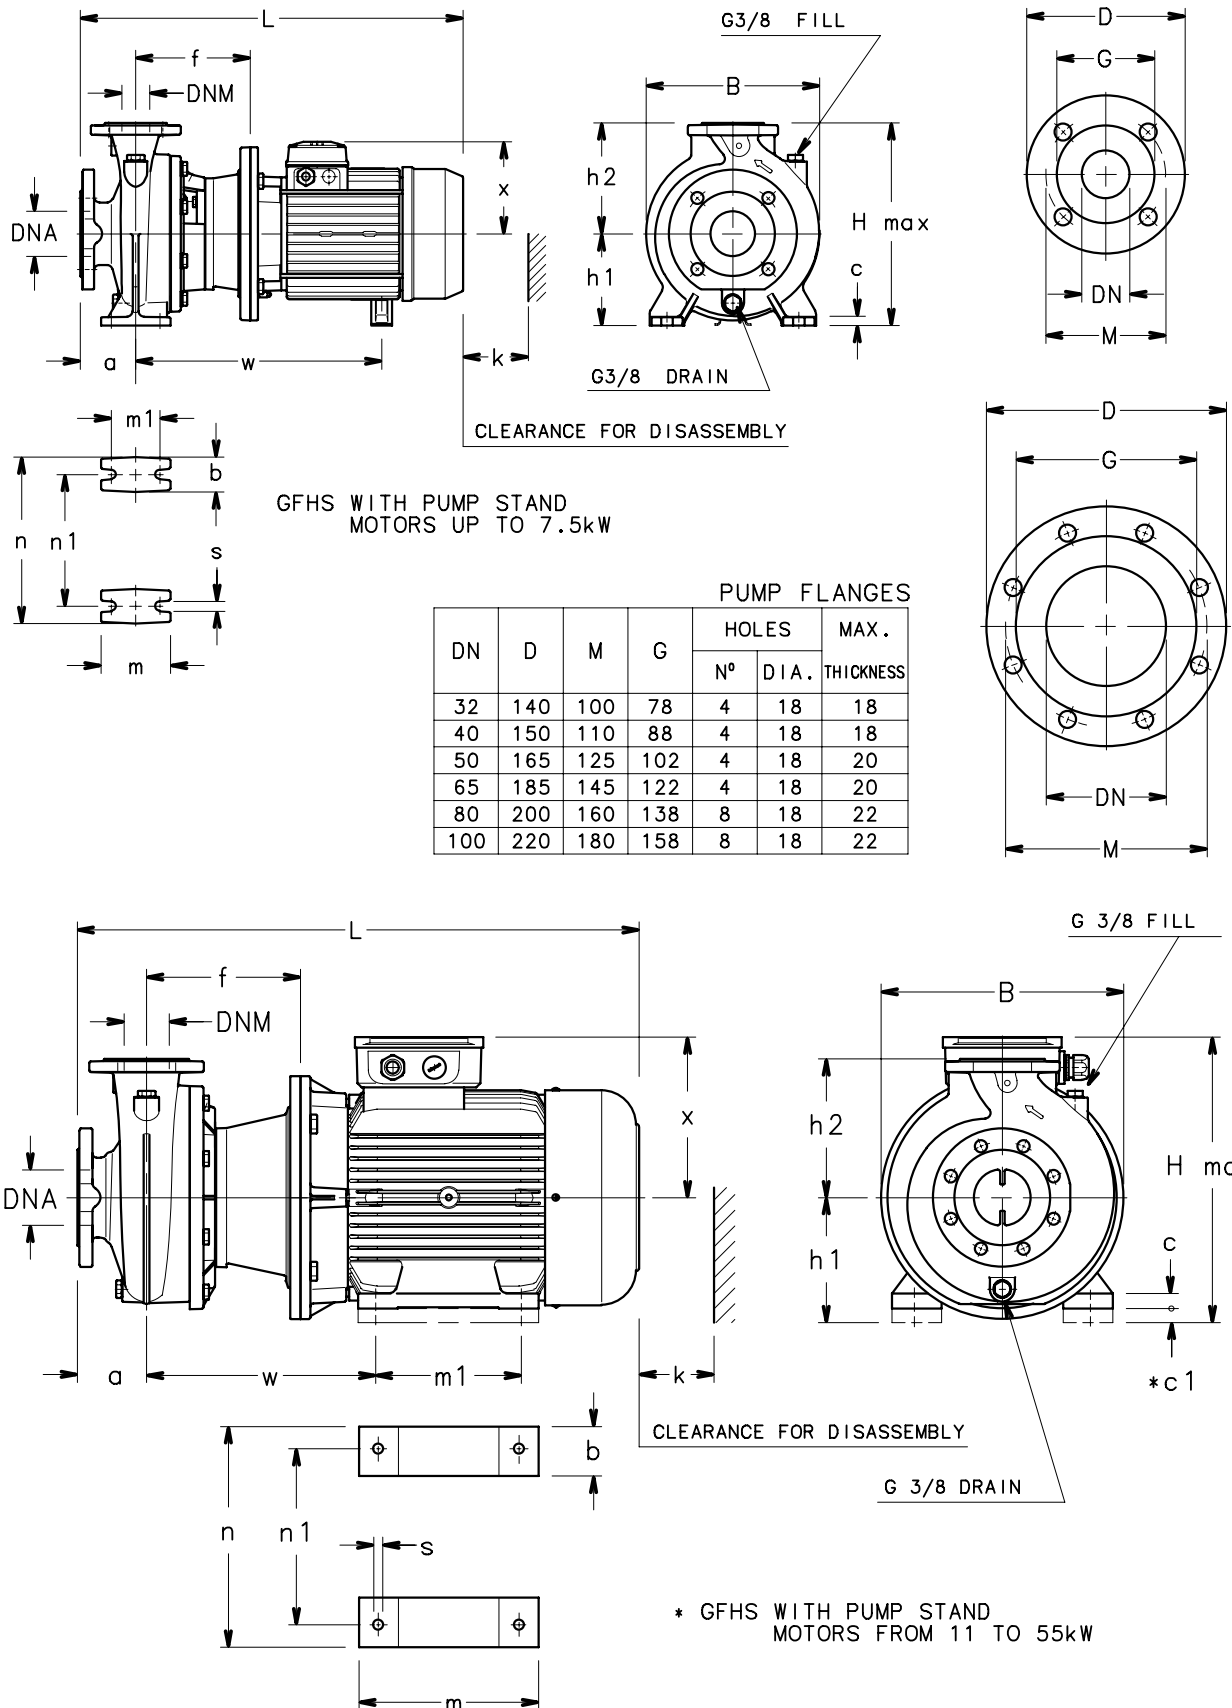

G04753D-EN_D_DD

GFHS SERIES


DIMENSIONS AND WEIGHTS AT 60 Hz, 2 POLES

PUMP TYPE	DIMENSIONS (mm)																B	H	L	k	WEIGHT
	PUMP						STAND														
	DNM	DNA	a	f	h2	w	x	b	c	*c1	h1	m	m1	n	n1	s					
																	max			kg	
GFHS 32-125/116/D	32	50	80	155	140	290	129	50	12	-	112	100	70	190	140	14	233	252	498	86	35,6
GFHS 32-160/156/D	32	50	80	155	160	290	129	50	12	-	132	100	70	240	190	14	235	292	498	86	36,4
GFHS 32-160/226/C	32	50	80	155	160	300	134	50	12	-	132	100	70	240	190	14	235	292	533	86	42
GFHS 32-200/306/P	32	50	80	165	180	310	134	50	12	-	160	100	70	240	190	14	285	340	543	86	55
GFHS 32-200/406/P	32	50	80	165	180	338	154	50	12	-	160	100	70	240	190	14	285	340	564	86	67
GFHS 40-125/156/D	40	65	80	155	140	290	129	50	12	-	112	100	70	210	160	14	233	252	498	88	37,4
GFHS 40-125/226/C	40	65	80	155	140	300	134	50	12	-	112	100	70	210	160	14	233	252	533	88	44
GFHS 40-160/306/P	40	65	80	165	160	310	134	50	12	-	132	100	70	240	190	14	250	292	543	88	48
GFHS 40-160/406/P	40	65	80	165	160	338	154	50	12	-	132	100	70	240	190	14	250	292	564	88	60
GFHS 40-200/556/P	40	65	100	192	180	399	168	50	12	-	160	100	70	265	212	14	300	340	667	88	76
GFHS 40-200/756/P	40	65	100	192	180	397	191	50	12	-	160	100	70	265	212	14	300	351	659	88	92
GFHS 40-250/1106A/P	40	65	100	222	225	330	240	49	5	20	180	304	210	304	254	15	350	420	816	107	124
GFHS 40-250/1106/P	40	65	100	222	225	330	240	49	5	20	180	304	210	304	254	15	350	420	816	107	124
GFHS 40-250/1506/P	40	65	100	222	225	330	240	49	5	20	180	304	210	304	254	15	350	420	816	107	138
GFHS 50-125/306/P	50	65	100	167	160	312	134	50	12	-	132	100	70	240	190	14	255	292	565	92	52
GFHS 50-125/406/P	50	65	100	167	160	340	154	50	12	-	132	100	70	240	190	14	255	292	586	92	61
GFHS 50-160/556/P	50	65	100	194	180	401	168	50	12	-	160	100	70	265	212	14	300	340	669	92	79
GFHS 50-160/756/P	50	65	100	194	180	399	191	50	12	-	160	100	70	265	212	14	300	351	661	92	95
GFHS 50-200/1106A/P	50	65	100	224	200	332	240	49	5	20	180	304	210	304	254	15	350	420	818	92	116
GFHS 50-200/1106/P	50	65	100	224	200	332	240	49	5	20	180	304	210	304	254	15	350	420	818	92	116
GFHS 50-250/1506/P	50	65	100	222	225	330	240	49	5	20	180	304	210	304	254	15	350	420	816	107	138
GFHS 50-250/1856/P	50	65	100	222	225	330	240	49	5	20	180	304	254	304	254	15	350	420	816	107	141
GFHS 50-250/2206/P	50	65	100	222	225	330	240	49	5	20	180	304	254	304	254	15	350	420	816	107	161
GFHS 65-125/556/P	65	80	100	194	180	401	168	65	14	-	160	125	95	280	212	14	300	340	669	105	83
GFHS 65-125/756/P	65	80	100	194	180	399	191	65	14	-	160	125	95	280	212	14	300	351	661	105	99
GFHS 65-160/1106A/P	65	80	100	222	200	330	240	49	5	20	180	304	210	304	254	15	350	420	816	112	128
GFHS 65-160/1106/P	65	80	100	222	200	330	240	49	5	20	180	304	210	304	254	15	350	420	816	112	128
GFHS 65-160/1506/P	65	80	100	222	200	330	240	49	5	20	180	304	210	304	254	15	350	420	816	112	142
GFHS 65-200/1856/P	65	80	100	222	225	330	240	49	5	20	180	304	254	304	254	15	350	420	816	112	145
GFHS 65-200/2206/P	65	80	100	222	225	330	240	49	5	20	180	304	254	304	254	15	350	420	816	112	165
GFHS 65-250/2206/P	65	80	100	222	250	330	240	49	5	40	200	304	254	304	254	15	350	450	816	112	159
GFHS 65-250/3006/C	65	80	100	228	250	361	317	82	30	-	200	370	305	385	318	18	400	517	985	112	296
GFHS 65-250/3706/C	65	80	100	228	250	361	317	82	30	-	200	370	305	385	318	18	400	517	985	112	325
GFHS 80-160/1506/P	80	100	125	222	225	330	240	49	5	20	180	304	210	304	254	15	350	420	841	129	143
GFHS 80-160/1856/P	80	100	125	222	225	330	240	49	5	20	180	304	254	304	254	15	350	420	841	129	152
GFHS 80-200/2206/P	80	100	125	222	250	330	240	49	5	20	180	304	254	304	254	15	350	430	841	129	165
GFHS 80-200/3006/C	80	100	125	228	250	361	317	82	30	-	200	370	305	385	318	18	400	517	1010	129	295
GFHS 80-250/3706/C	80	100	125	228	280	361	317	82	30	-	200	370	305	385	318	18	400	517	1010	129	320
GFHS 80-250/4506/C	80	100	125	228	280	377	384	80	34	-	225	412	311	436	356	18	450	609	1099	129	424
GFHS 80-250/5506/C	80	100	125	258	280	426	402	100	43	-	250	467	349	506	406	24	550	652	1208	129	499

* Motor shim on request

gfh-gfhs-2p60-en_d_td

GFHS SERIES DIMENSIONS AND WEIGHTS AT 60 Hz, 2 POLES

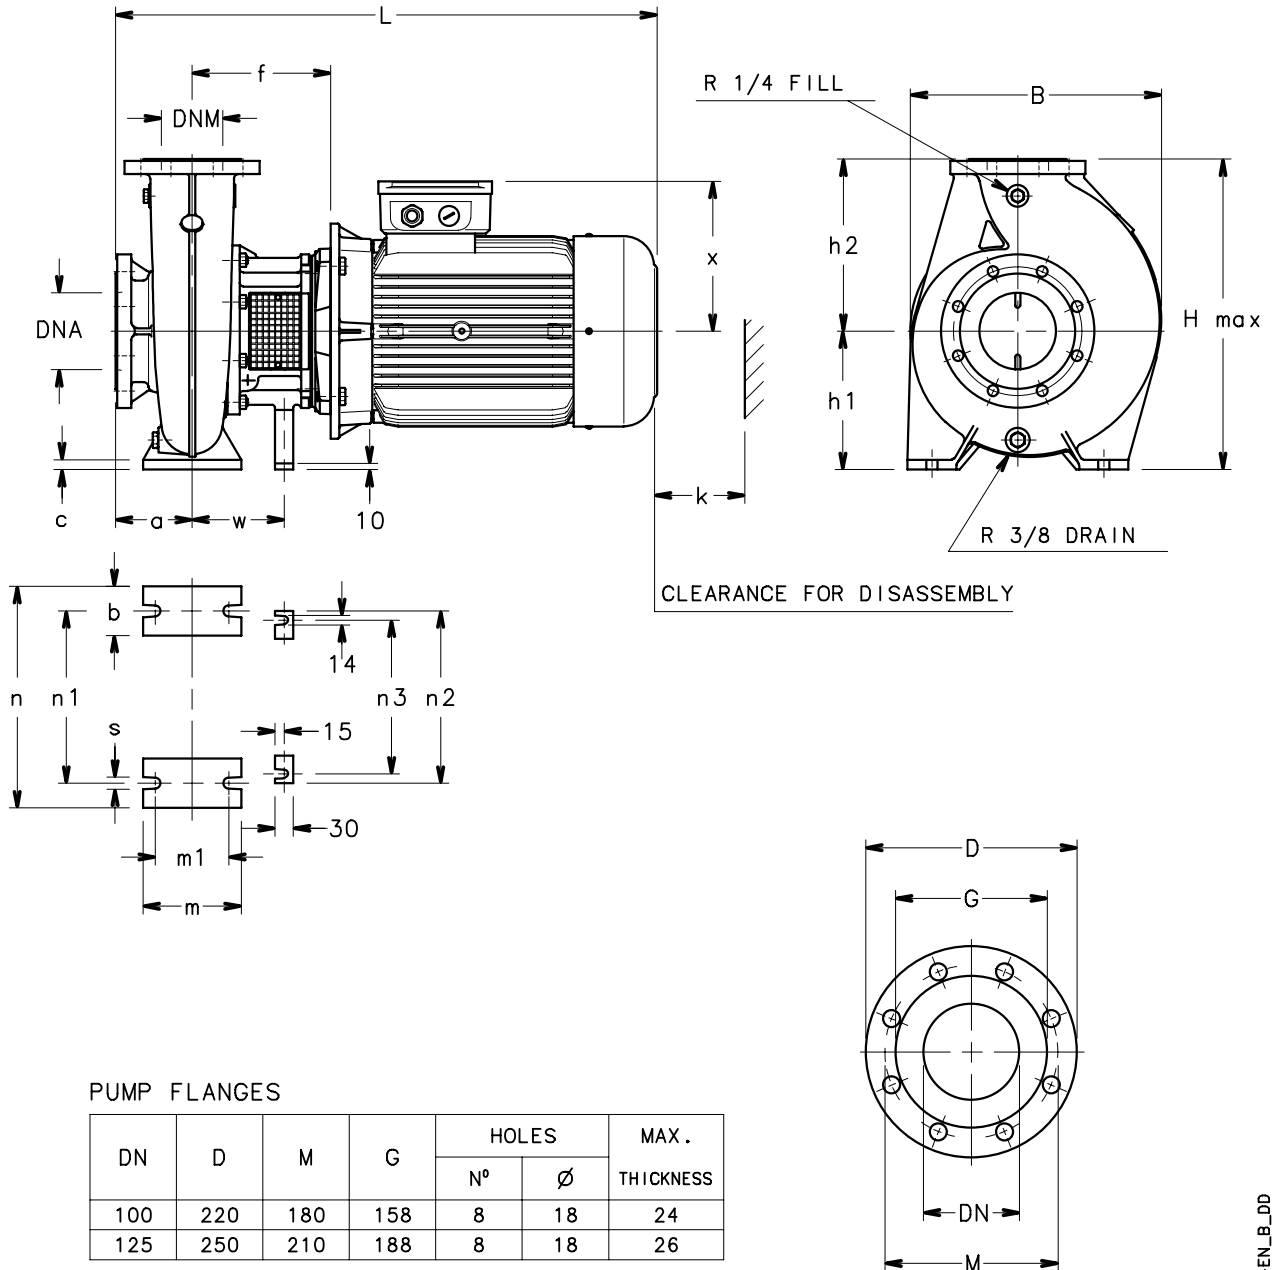

04751D-EN_B_DD


GFHS SERIES

DIMENSIONS AND WEIGHTS AT 60 Hz, 2 POLES

PUMP TYPE	DIMENSIONS (mm)																	B	H	L	k	WEIGHT
	PUMP							STAND														
	DNM	DNA	a	f	h2	w	x	b	c	h1	m	m1	n	n1	n2	n3	s					
GFHS 100-160/3006/C	100	125	125	231	280	185	317	80	16	225	160	120	360	280	210	180	18	435	542	1013	143	348
GFHS 100-200/3006/C	100	125	125	231	280	185	317	80	16	200	160	120	360	280	210	180	18	405	517	1013	153	340
GFHS 100-200/3706/C	100	125	125	231	280	185	317	80	16	200	160	120	360	280	210	180	18	405	517	1013	153	360

lm-gfhs-2p60-en_d_td

GFHS4 SERIES DIMENSIONS AND WEIGHTS AT 60 Hz, 4 POLES

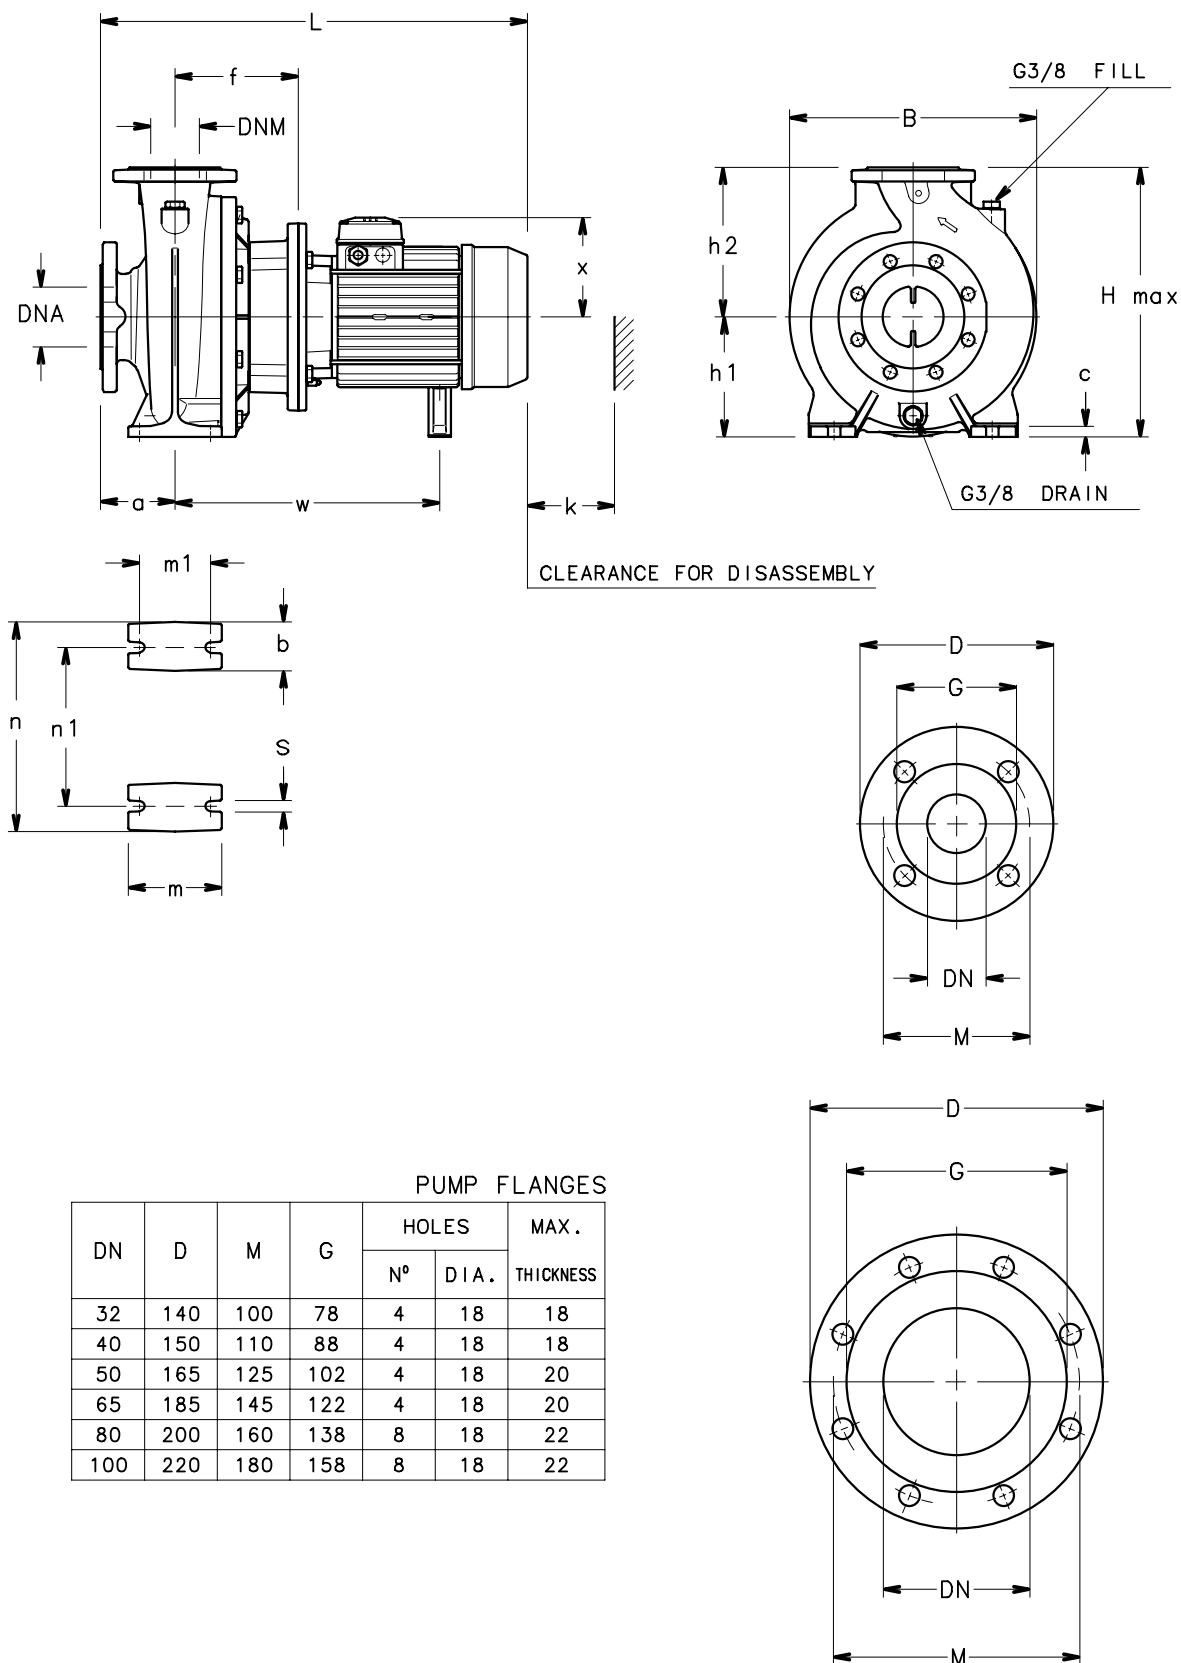

04754D-EN_B_DD

GFHS4 SERIES


DIMENSIONS AND WEIGHTS AT 60 Hz, 4 POLES

PUMP TYPE	DIMENSIONS (mm)															B	H	L	k	WEIGHT
	PUMP							STAND												
	DNM	DNA	a	f	h2	w	x	b	c	h1	m	m1	n	n1	s					
GFHS4 40-200/076/C	40	65	100	155	180	-	128	50	12	160	100	70	265	212	14	285	340	486	88	45
GFHS4 40-200/116/P	40	65	100	155	180	300	134	50	12	160	100	70	265	212	14	285	340	553	88	53
GFHS4 40-250/116/P	40	65	100	155	225	300	134	65	14	180	125	95	320	250	14	335	405	553	107	63
GFHS4 40-250/156/P	40	65	100	155	225	300	134	65	14	180	125	95	320	250	14	335	405	553	107	66
GFHS4 40-250/226/P	40	65	100	165	225	350	168	65	14	180	125	95	320	250	14	335	405	587	107	75
GFHS4 50-160/076/C	50	65	100	157	180	-	128	50	12	160	100	70	265	212	14	285	340	488	92	48
GFHS4 50-160/116/P	50	65	100	157	180	302	134	50	12	160	100	70	265	212	14	285	340	555	92	56
GFHS4 50-200/116/P	50	65	100	157	200	302	134	50	12	160	100	70	265	212	14	305	360	555	92	56
GFHS4 50-200/156/P	50	65	100	157	200	302	134	50	12	160	100	70	265	212	14	305	360	555	92	59
GFHS4 50-250/226A/P	50	65	100	165	225	350	168	65	14	180	125	95	320	250	14	340	405	587	107	75
GFHS4 50-250/226/P	50	65	100	165	225	350	168	65	14	180	125	95	320	250	14	340	405	587	107	75
GFHS4 50-250/306/P	50	65	100	165	225	350	168	65	14	180	125	95	320	250	14	340	405	618	107	78
GFHS4 65-125/076/C	65	80	100	157	180	-	128	65	14	160	125	95	280	212	14	285	340	488	105	54
GFHS4 65-125/116/P	65	80	100	157	180	302	134	65	14	160	125	95	280	212	14	285	340	555	105	60
GFHS4 65-160/116/P	65	80	100	155	200	300	134	65	14	160	125	95	280	212	14	331	360	553	112	67
GFHS4 65-160/156/P	65	80	100	155	200	300	134	65	14	160	125	95	280	212	14	331	360	553	112	70
GFHS4 65-160/226/P	65	80	100	165	200	350	168	65	14	160	125	95	280	212	14	331	360	587	112	79
GFHS4 65-200/226/P	65	80	100	165	225	350	168	65	14	180	125	95	320	250	14	335	405	587	112	79
GFHS4 65-200/306/P	65	80	100	165	225	350	168	65	14	180	125	95	320	250	14	335	405	618	112	82
GFHS4 65-250/306/P	65	80	100	165	250	350	168	80	16	200	160	120	360	280	18	360	450	618	112	88
GFHS4 65-250/406/P	65	80	100	165	250	380	168	80	16	200	160	120	360	280	18	360	450	663	112	121
GFHS4 65-250/556/P	65	80	100	192	250	435	191	80	16	200	160	120	360	280	18	360	450	697	112	123
GFHS4 80-160/156/P	80	100	125	155	225	300	134	65	14	180	125	95	320	250	14	332	405	578	129	77
GFHS4 80-160/226/P	80	100	125	165	225	350	168	65	14	180	125	95	320	250	14	332	405	612	129	85
GFHS4 80-200/306/P	80	100	125	165	250	350	168	65	14	180	125	95	345	280	14	345	430	643	129	91
GFHS4 80-200/406/P	80	100	125	165	250	380	168	65	14	180	125	95	345	280	14	345	430	688	129	124
GFHS4 80-250/406/P	80	100	125	165	280	380	168	80	16	200	160	120	400	315	18	400	480	688	129	130
GFHS4 80-250/556/P	80	100	125	192	280	435	191	80	16	200	160	120	400	315	18	400	480	722	129	132
GFHS4 80-250/756/P	80	100	125	192	280	435	191	80	16	200	160	120	400	315	18	400	480	722	129	137

NOTE: for models GFHS4 65-315 and GFHS4 80-315 consult the following pages.

gfh-gfhs4-4p60-en_d_td



GFHS4 SERIES DIMENSIONS AND WEIGHTS AT 60 Hz, 4 POLES

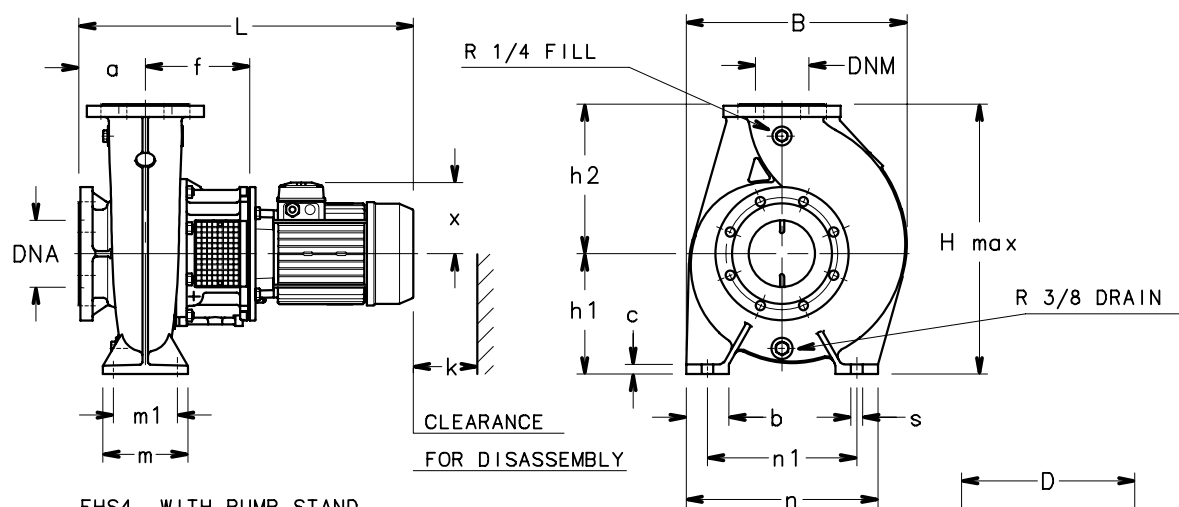

FHS4 WITH PUMP STAND
MOTORS 3 + 4 kW

PUMP FLANGES

DN	D	M	G	HOLES		MAX. THICKNESS
				Nº	DIA.	
65	185	145	122	4	18	20
80	200	160	138	8	18	22
100	220	180	158	8	18	24
125	250	210	188	8	18	26
150	285	240	212	8	22	26
200	340	295	268	8	22	26

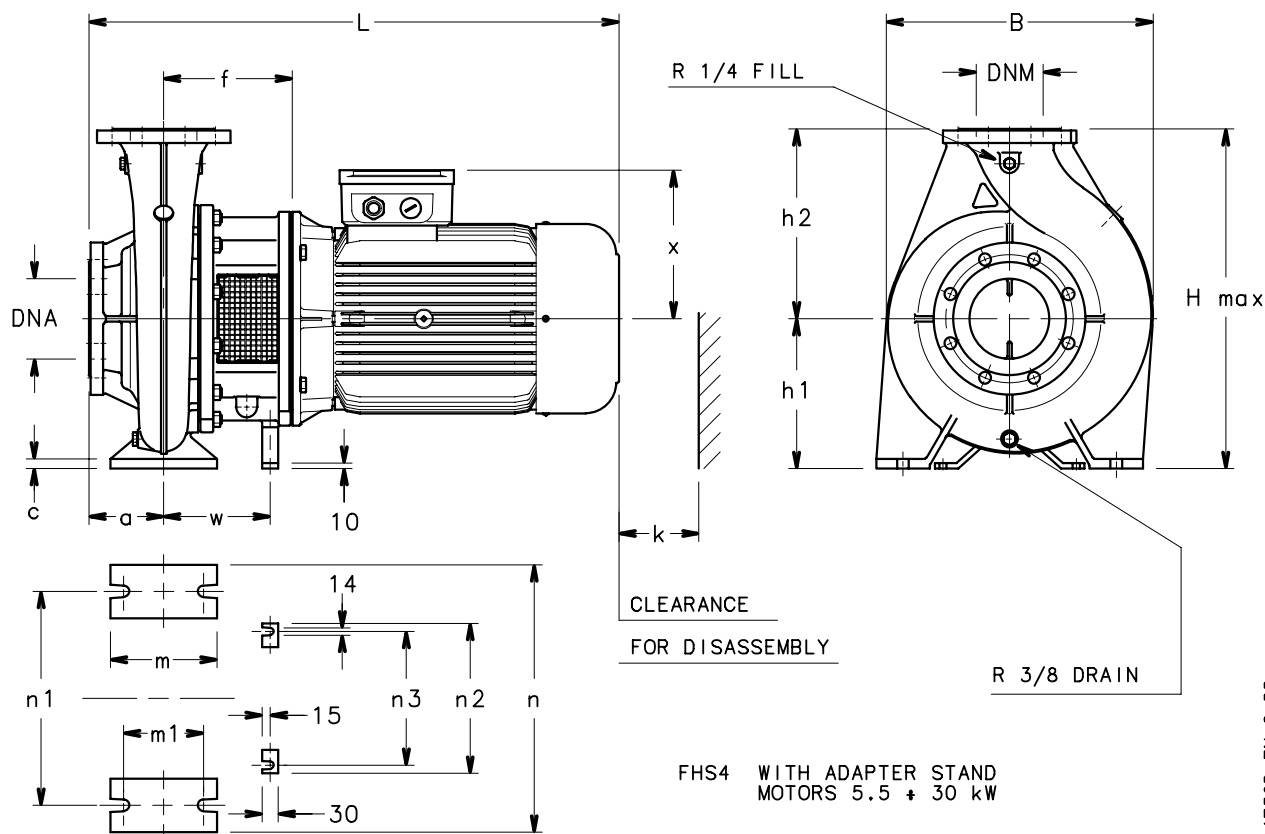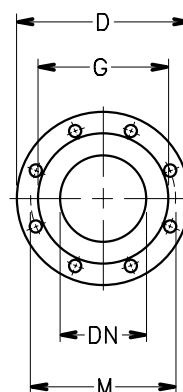

FHS4 WITH ADAPTER STAND
MOTORS 5.5 + 30 kW

04752D-EN_C_DD


GFHS4 SERIES

DIMENSIONS AND WEIGHTS AT 60 Hz, 4 POLES

PUMP TYPE	DIMENSIONS (mm)																		B	H	L	k	WEIGHT
	PUMP								STAND														
	DNM	DNA	a	f	h2	w	x	b	c	h1	m	m1	n	n1	n2	n3	s						
																		max				kg	
GFHS4 65-315/556/P	65	80	125	196	280	150	191	80	14	225	160	120	400	315	210	180	18	434	505	726	160	151	
GFHS4 65-315/756/P	65	80	125	196	280	150	191	80	14	225	160	120	400	315	210	180	18	434	505	726	160	151	
GFHS4 65-315/1106/P	65	80	125	226	280	150	240	80	14	225	160	120	400	315	210	180	18	434	505	845	160	209	
GFHS4 65-315/1506/P	65	80	125	226	280	150	240	80	14	225	160	120	400	315	210	180	18	434	505	845	160	217	
GFHS4 65-315/1856/C	65	80	125	226	280	150	279	80	14	225	160	120	400	315	210	180	18	434	505	905	160	271	
GFHS4 80-315/1106/P	80	100	125	226	315	150	240	80	16	250	160	120	400	315	210	180	18	450	565	845	160	215	
GFHS4 80-315/1506/P	80	100	125	226	315	150	240	80	16	250	160	120	400	315	210	180	18	450	565	845	160	224	
GFHS4 80-315/1856/C	80	100	125	226	315	150	279	80	16	250	160	120	400	315	210	180	18	450	565	905	160	278	
GFHS4 80-315/2206/C	80	100	125	226	315	150	279	80	16	250	160	120	400	315	210	180	18	450	565	943	160	300	
GFHS4 100-160/406/P	100	125	125	196	280	-	168	80	16	225	160	120	360	280	-	-	18	415	505	719	143	110	
GFHS4 100-160/556/P	100	125	125	196	280	150	191	80	16	225	160	120	360	280	280	250	18	415	505	726	143	138	
GFHS4 100-200/406/P	100	125	125	196	280	-	168	80	18	200	160	120	360	280	-	-	18	385	480	719	153	99	
GFHS4 100-200/556/P	100	125	125	196	280	150	191	80	18	200	160	120	360	280	210	180	18	385	480	726	153	125	
GFHS4 100-200/756/P	100	125	125	196	280	150	191	80	18	200	160	120	360	280	210	180	18	385	480	726	153	125	
GFHS4 100-200/1106/P	100	125	125	226	280	150	240	80	18	200	160	120	360	280	210	180	18	385	480	845	153	171	
GFHS4 100-250/1106/P	100	125	140	226	280	150	240	80	16	225	160	120	400	315	210	180	18	425	505	860	150	212	
GFHS4 100-250/1506/P	100	125	140	226	280	150	240	80	16	225	160	120	400	315	210	180	18	425	505	860	150	220	
GFHS4 100-250/1856/C	100	125	140	226	280	150	279	80	16	225	160	120	400	315	210	180	18	425	505	920	150	274	
GFHS4 100-315/2206/C	100	125	140	226	315	150	279	80	16	250	160	120	400	315	210	180	18	486	565	958	160	303	
GFHS4 100-315/3006/C	100	125	140	226	315	150	317	80	16	250	160	120	400	315	210	180	18	486	577	1023	160	339	
GFHS4 125-200/756/P	125	150	140	211	315	165	191	80	16	250	160	120	400	315	280	250	18	469	565	756	160	158	
GFHS4 125-200/1106/P	125	150	140	241	315	165	240	80	16	250	160	120	400	315	280	250	18	469	565	875	160	204	
GFHS4 125-200/1506/P	125	150	140	241	315	165	240	80	16	250	160	120	400	315	280	250	18	469	565	875	160	212	
GFHS4 125-250/1106/P	125	150	140	226	355	150	240	80	16	250	160	120	400	315	280	250	18	493	605	860	158	214	
GFHS4 125-250/1506/P	125	150	140	226	355	150	240	80	16	250	160	120	400	315	280	250	18	493	605	860	158	223	
GFHS4 125-250/1856/C	125	150	140	226	355	150	279	80	16	250	160	120	400	315	280	250	18	493	605	920	158	272	
GFHS4 125-250/2206/C	125	150	140	226	355	150	279	80	16	250	160	120	400	315	280	250	18	493	605	958	158	294	
GFHS4 125-250/3006/C	125	150	140	226	355	150	317	80	16	250	160	120	400	315	280	250	18	493	635	1023	158	330	
GFHS4 125-315/3006/C	125	150	140	241	355	200	317	100	18	280	200	150	500	400	280	250	22	520	635	1038	171	386	
GFHS4 150-250/2206/C	150	200	160	246	375	200	279	100	18	280	200	150	500	400	280	250	22	550	655	998	181	356	
GFHS4 150-250/3006/C	150	200	160	246	375	200	317	100	18	280	200	150	500	400	280	250	22	550	655	1063	181	387	

lm-gfhs4-4p60_d_td

GFHF SERIES BARE SHAFT DIMENSIONS AND WEIGHTS AT 60 Hz

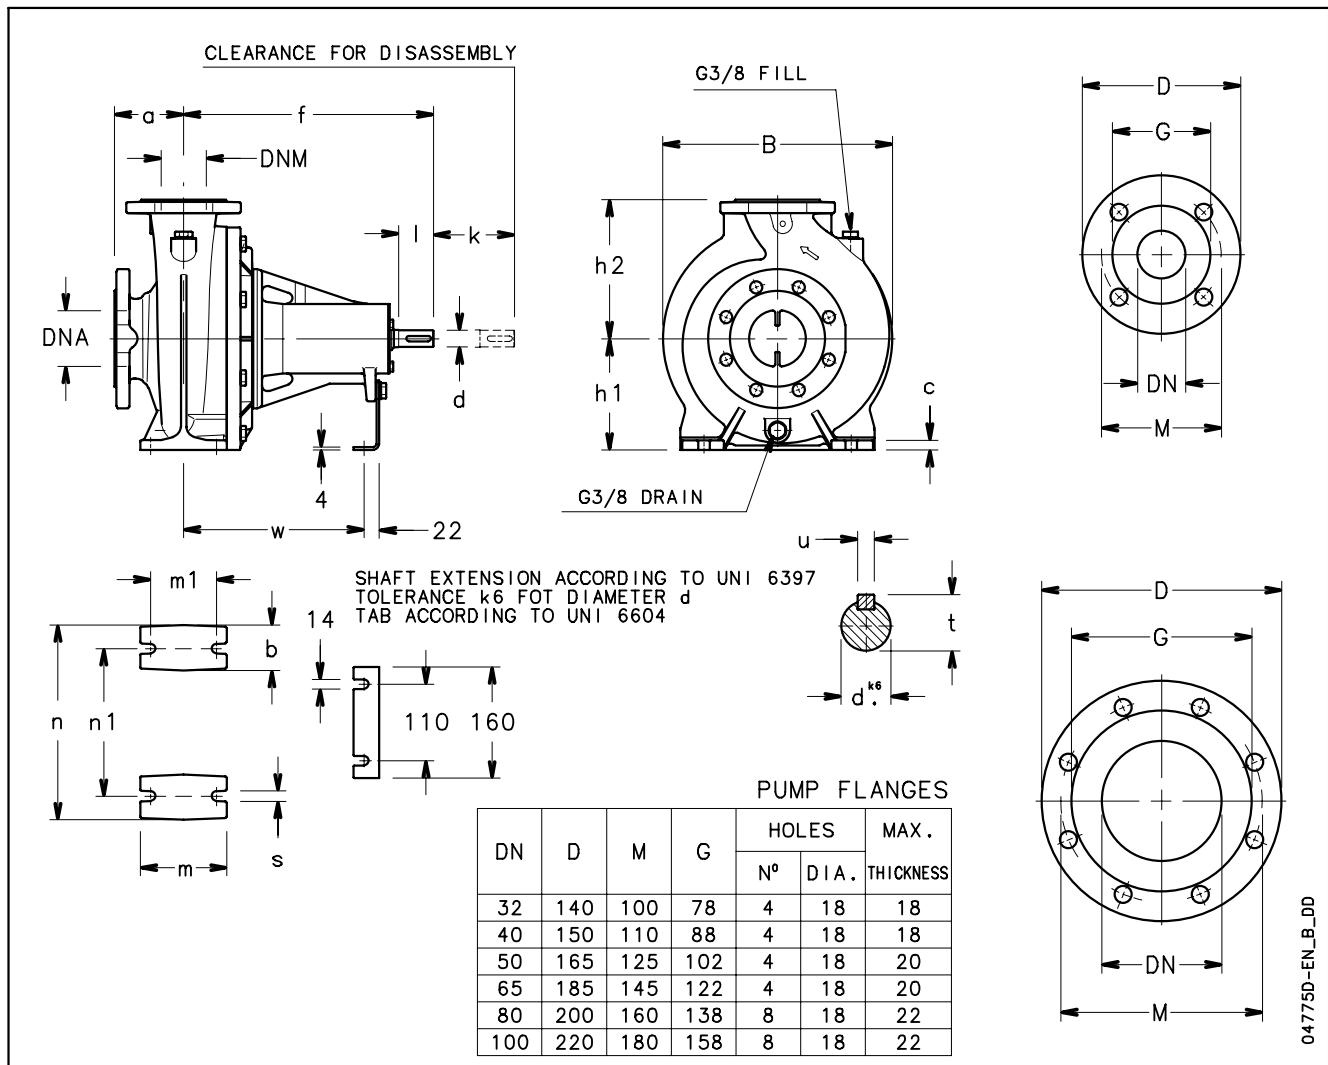


PUMP TYPE	DIMENSIONS (mm)																		B	k	WEIGHT
	PUMP						STAND								SHAFT						
	DNM	DNA	a	f	h1	h2	b	c	m	m1	n	n1	s	w	d	l	t	u			kg
GFHF 32-125	32	50	80	360	112	140	50	12	100	70	190	140	14	260	24	50	27	8	233	86	27
GFHF 32-160	32	50	80	360	132	160	50	12	100	70	240	190	14	260	24	50	27	8	235	86	30
GFHF 32-200	32	50	80	360	160	180	50	12	100	70	240	190	14	260	24	50	27	8	285	86	34
GFHF 40-125	40	65	80	360	112	140	50	12	100	70	210	160	14	260	24	50	27	8	233	88	27
GFHF 40-160	40	65	80	360	132	160	50	12	100	70	240	190	14	260	24	50	27	8	250	88	29
GFHF 40-200	40	65	100	360	160	180	50	12	100	70	265	212	14	260	24	50	27	8	285	88	37
GFHF 40-250	40	65	100	360	180	225	65	14	125	95	320	250	14	260	24	50	27	8	335	100	57
GFHF 50-125	50	65	100	360	132	160	50	12	100	70	240	190	14	260	24	50	27	8	255	92	31
GFHF 50-160	50	65	100	360	160	180	50	12	100	70	265	212	14	260	24	50	27	8	285	92	39
GFHF 50-200	50	65	100	360	160	200	50	12	100	70	265	212	14	260	24	50	27	8	305	92	43
GFHF 50-250	50	65	100	360	180	225	65	14	125	95	320	250	14	260	24	50	27	8	340	100	57
GFHF 65-125	65	80	100	360	160	180	65	14	125	95	280	212	14	260	24	50	27	8	285	100	33
GFHF 65-160	65	80	100	360	160	200	65	14	125	95	280	212	14	260	24	50	27	8	331	100	55
GFHF 65-200	65	80	100	360	180	225	65	14	125	95	320	250	14	260	24	50	27	8	335	112	61
GFHF 65-250	65	80	100	470	200	250	80	16	160	120	360	280	18	340	32	80	35	10	360	112	78
GFHF 80-160	80	100	125	360	180	225	65	14	125	95	320	250	14	260	24	50	27	8	332	129	73
GFHF 80-200	80	100	125	470	180	250	65	14	125	95	345	280	14	340	32	80	35	10	345	129	80
GFHF 80-250	80	100	125	470	200	280	80	16	160	120	400	315	18	340	32	80	35	10	400	129	89

NOTE: for model GFHF 65-315 consult table on following page.

gfh-gfhf-en_a_td


GFHF SERIES BARE SHAFT DIMENSIONS AND WEIGHTS AT 60 Hz

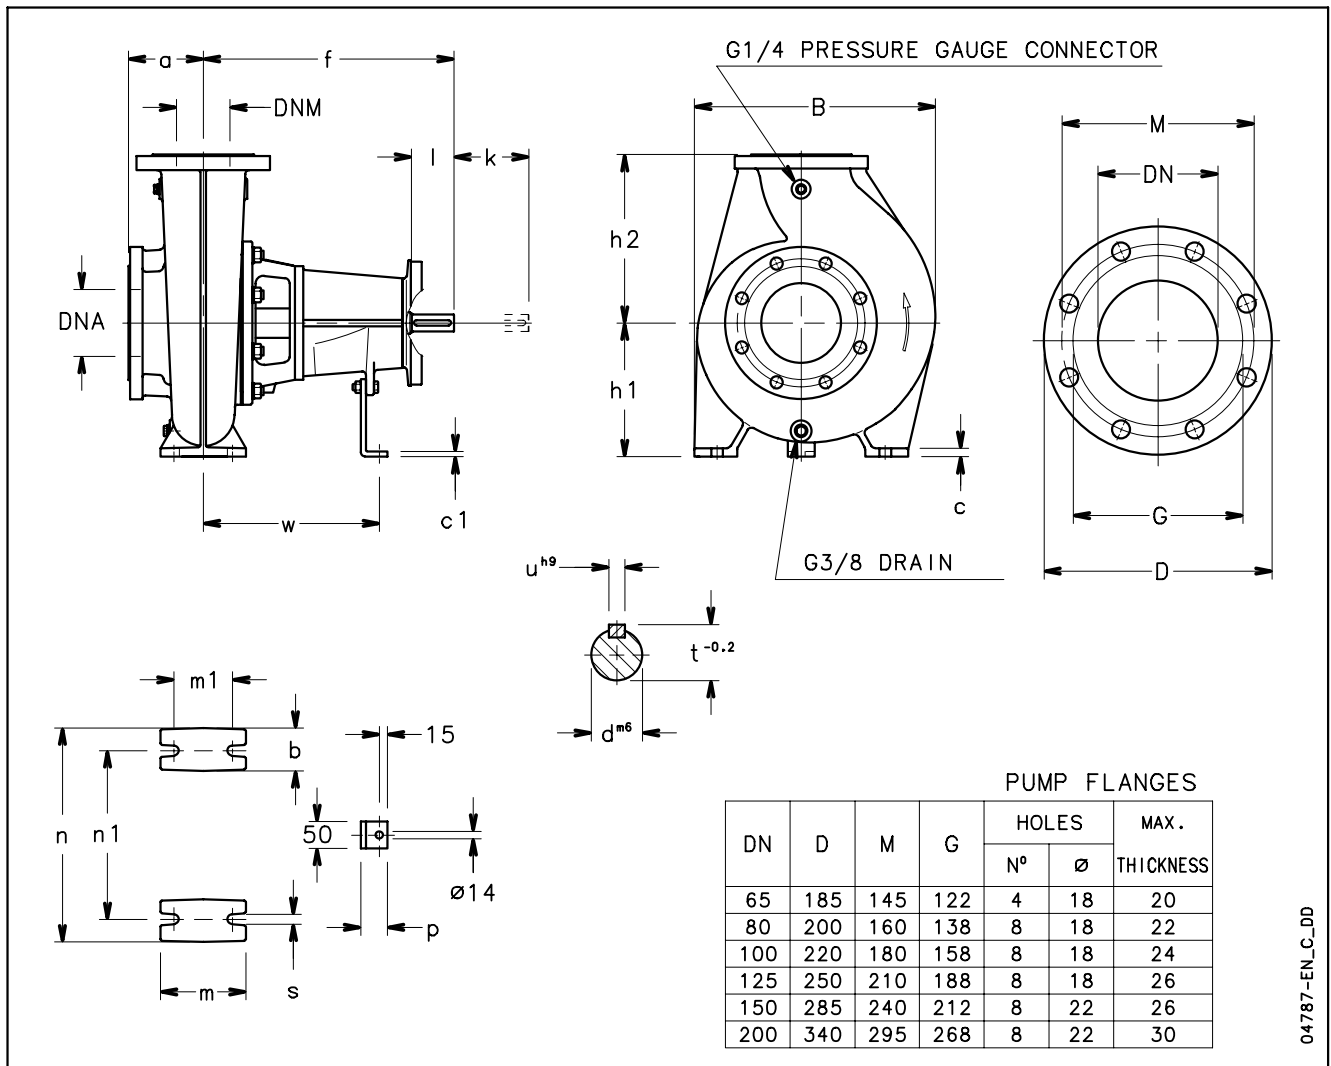

PUMP TYPE	DIMENSIONS (mm)																						WEIGHT kg
	PUMP								STAND									SHAFT					
	DNM	DNA	a	f	h1	h2	k	B	b	c	c1	m	m1	n	n1	s	p	w	d	l	t	u	
GFHF 65-315	65	80	125	470	225	280	140	434	80	14	5	160	120	400	315	18	39	330	32	80	35	10	100
GFHF 80-315	80	100	125	470	250	315	140	451	80	16	5	160	120	400	315	18	39	330	32	80	35	10	116
GFHF 80-400	80	100	125	530	280	355	140	486	80	20	6	160	120	435	355	18	41	360	42	110	45	12	153
GFHF 100-160	100	125	125	470	225	280	140	415	80	16	5	160	120	360	280	18	39	330	32	80	35	10	67
GFHF 100-200	100	125	125	470	200	280	140	385	80	18	5	160	120	360	280	18	39	330	32	80	35	10	79
GFHF 100-250	100	125	140	470	225	280	140	425	80	18	5	160	120	400	315	18	39	330	32	80	35	10	94
GFHF 100-315	100	125	140	470	250	315	140	472	80	18	5	160	120	400	315	18	39	330	32	80	35	10	118
GFHF 100-400	100	125	140	530	280	355	140	529	100	20	6	200	150	500	400	22	41	360	42	110	45	12	162
GFHF 125-200	125	150	140	530	250	315	140	463	80	18	6	160	120	400	315	18	41	360	42	110	45	12	113
GFHF 125-250	125	150	140	470	250	355	140	474	80	18	5	160	120	400	315	18	39	330	32	80	35	10	115
GFHF 125-315	125	150	140	530	280	355	140	520	100	20	6	200	150	500	400	22	41	360	42	110	45	12	143
GFHF 125-400	125	150	140	530	315	400	140	550	100	20	6	200	150	500	400	22	41	360	42	110	45	12	173
GFHF 150-250	150	200	160	535	280	375	140	550	100	20	6	200	150	500	400	22	41	360	42	110	45	12	147
GFHF 150-315	150	200	160	530	280	400	140	587	100	20	6	200	150	550	450	22	41	360	42	110	45	12	166
GFHF 150-400	150	200	160	530	315	450	140	603	100	20	6	200	150	550	450	22	41	360	42	110	45	12	195

l-gfhf-en_a_td

GFHF SERIES MOUNTED ON BASE DIMENSIONS AND WEIGHTS AT 60 Hz, 2 POLES

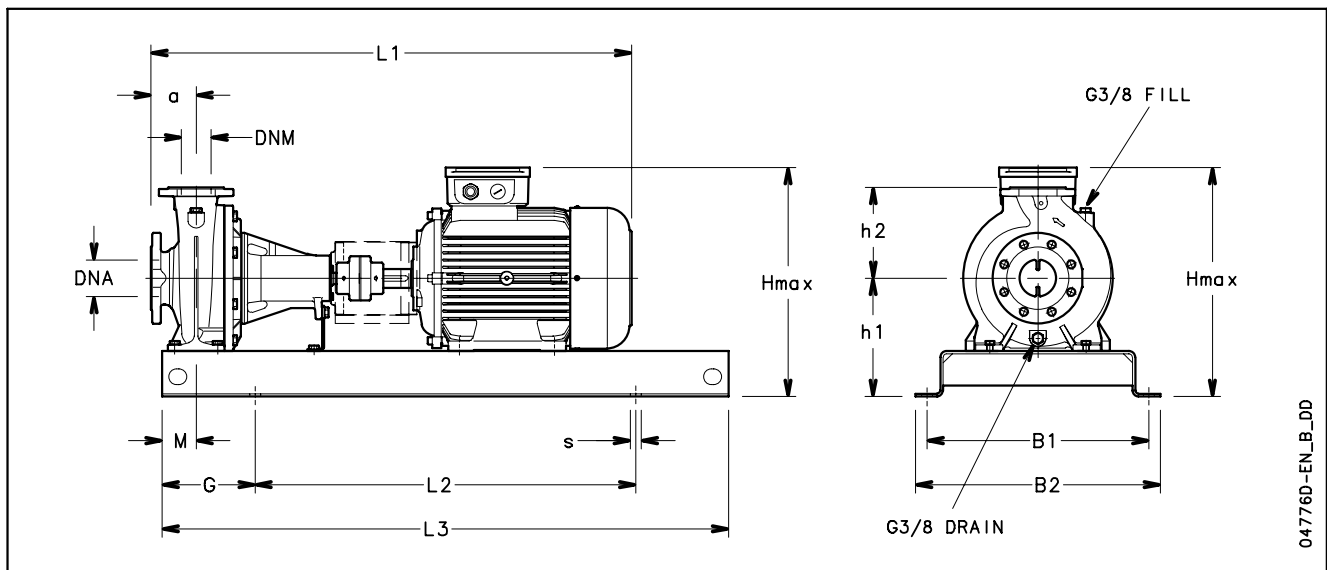


GFHF SERIES MOUNTED ON BASE

DIMENSIONS AND WEIGHTS AT 60 Hz, 2 POLES

PUMP TYPE	DIMENSIONS (mm)													s FOR SCREWS	WEIGHT kg	COUPLING TYPE
	DNM	DNA	a	B1	B2	L1	L2	L3	G	M	h1	h2	Hmax			
GFHF 32-125/116/D	32	50	80	320	360	746	540	800	130	60	212	140	352	M16	70,6	A2
GFHF 32-160/156/P	32	50	80	350	390	791	600	900	150	60	232	160	392	M16	75	A3
GFHF 32-160/226/P	32	50	80	350	390	791	600	900	150	60	232	160	392	M16	77	A3
GFHF 32-200/306/P	32	50	80	350	390	822	600	900	150	60	260	180	440	M16	97	B1
GFHF 32-200/406/P	32	50	80	350	390	825	600	900	150	60	260	180	440	M16	99	B1
GFHF 40-125/156/P	40	65	80	350	390	791	600	900	150	60	212	140	352	M16	78	A3
GFHF 40-125/226/P	40	65	80	350	390	791	600	900	150	60	212	140	352	M16	81	A3
GFHF 40-160/306/P	40	65	80	350	390	822	600	900	150	60	232	160	392	M16	96	B1
GFHF 40-160/406/P	40	65	80	350	390	825	600	900	150	60	232	160	400	M16	100	B1
GFHF 40-200/556/P	40	65	100	400	450	910	660	1000	170	60	260	180	451	M20	127	C1
GFHF 40-200/756/P	40	65	100	400	450	910	660	1000	170	60	260	180	451	M20	132	C1
GFHF 40-250/1106A/P	40	65	100	490	540	1067	840	1250	205	75	280	225	520	M20	183	C2
GFHF 40-250/1106/P	40	65	100	490	540	1067	840	1250	205	75	280	225	520	M20	183	C2
GFHF 40-250/1506/P	40	65	100	490	540	1067	840	1250	205	75	280	225	520	M20	193	C2
GFHF 50-125/306/P	50	65	100	350	390	842	600	900	150	60	232	160	392	M16	97	B1
GFHF 50-125/406/P	50	65	100	350	390	845	600	900	150	60	232	160	400	M16	100	B1
GFHF 50-160/556/P	50	65	100	400	450	910	660	1000	170	60	260	180	451	M20	126	C1
GFHF 50-160/756/P	50	65	100	400	450	910	660	1000	170	60	260	180	451	M20	130	C1
GFHF 50-200/1106A/P	50	65	100	440	490	1067	740	1120	190	60	260	200	500	M20	178	C2
GFHF 50-200/1106/P	50	65	100	440	490	1067	740	1120	190	60	260	200	500	M20	178	C2
GFHF 50-250/1506/P	50	65	100	490	540	1067	840	1250	205	75	280	225	520	M20	184	C2
GFHF 50-250/1856/P	50	65	100	490	540	1067	840	1250	205	75	280	225	520	M20	195	C2
GFHF 50-250/2206/C	50	65	100	490	540	1127	840	1250	205	75	280	225	559	M20	285	D1
GFHF 65-125/556/P	65	80	100	400	450	910	660	1000	170	75	260	180	451	M20	156	C1
GFHF 65-125/756/P	65	80	100	400	450	910	660	1000	170	75	260	180	451	M20	160	C1
GFHF 65-160/1106A/P	65	80	100	490	540	1067	840	1250	205	75	260	200	500	M20	169	C2
GFHF 65-160/1106/P	65	80	100	490	540	1067	840	1250	205	75	260	200	500	M20	169	C2
GFHF 65-160/1506/P	65	80	100	490	540	1067	840	1250	205	75	260	200	500	M20	185	C2
GFHF 65-200/1856/P	65	80	100	490	540	1067	840	1250	205	75	280	225	520	M20	200	C2
GFHF 65-200/2206/C	65	80	100	490	540	1127	840	1250	205	75	280	225	559	M20	281	D1
GFHF 65-250/2206/C	65	80	100	490	540	1237	840	1250	205	90	310	250	589	M20	289	D2
GFHF 65-250/3006/C	65	80	100	550	610	1340	940	1400	230	90	310	250	627	M24	396	E1
GFHF 65-250/3706/C	65	80	100	550	610	1340	940	1400	230	90	310	250	627	M24	422	E1
GFHF 80-160/1506/P	80	100	125	490	540	1092	840	1250	205	75	280	225	520	M20	217	C2
GFHF 80-160/1856/P	80	100	125	490	540	1092	840	1250	205	75	280	225	520	M20	228	C2
GFHF 80-200/2206/C	80	100	125	490	540	1262	840	1250	205	75	280	250	559	M20	311	D2
GFHF 80-200/3006/C	80	100	125	550	610	1365	940	1400	230	75	310	250	627	M24	381	E1
GFHF 80-250/3706/C	80	100	125	550	610	1365	940	1400	230	90	310	280	627	M24	412	E1
GFHF 80-250/4506/C	80	100	125	550	610	1454	940	1400	230	90	365	280	749	M24	511	E1
GFHF 80-250/5506/C	80	100	125	600	660	1563	1060	1600	270	90	390	280	792	M24	588	F1

gfh-gfhf-2p60-en_e_td

GFHF4 SERIES MOUNTED ON BASE DIMENSIONS AND WEIGHTS AT 60 Hz, 4 POLES

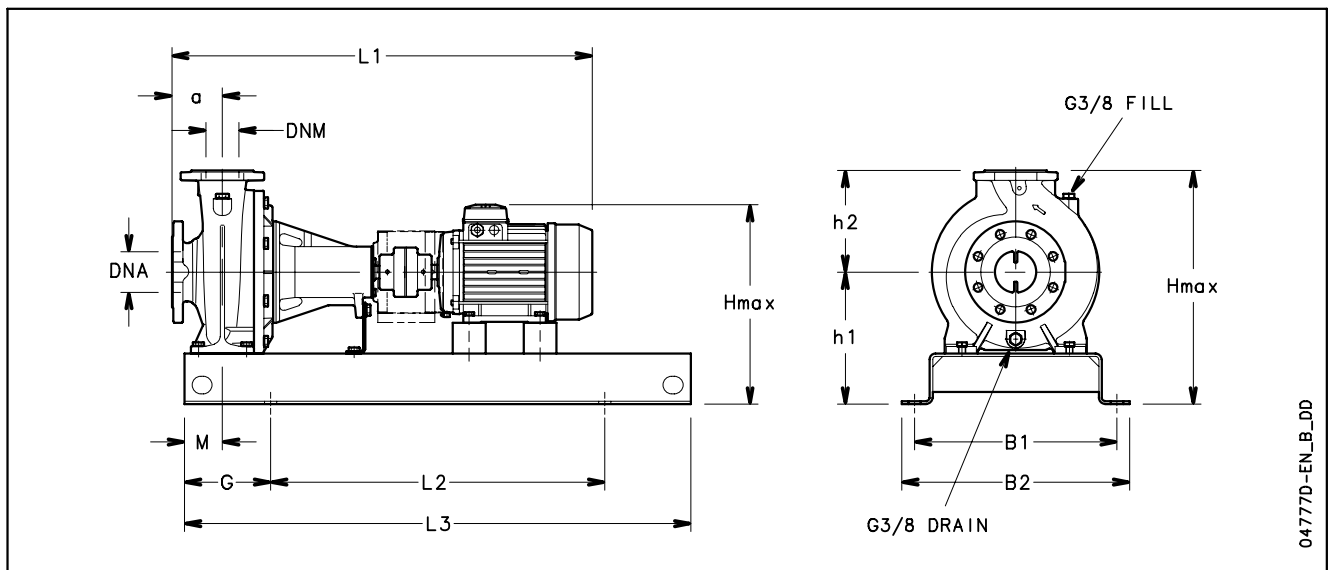


GFHF4 SERIES MOUNTED ON BASE

DIMENSIONS AND WEIGHTS AT 60 Hz, 4 POLES

PUMP TYPE	DIMENSIONS (mm)													s FOR	WEIGHT	COUPLING
	DNM	DNA	a	B1	B2	L1	L2	L3	G	M	h1	h2	Hmax	SCREWS	kg	TYPE
GFHF4 32-125/026/A	32	50	80	320	360	704	540	800	130	60	212	140	352	M16	74	A1
GFHF4 32-160/026/A	32	50	80	320	360	704	540	800	130	60	232	160	392	M16	76	A1
GFHF4 32-160/036/A	32	50	80	320	360	704	540	800	130	60	232	160	392	M16	78	A1
FHE4 32-200/036/A	32	50	80	320	360	704	540	800	130	60	260	180	440	M16	80	A1
GFHF4 32-200/056/A	32	50	80	320	360	746	540	800	130	60	260	180	440	M16	82	A2
GFHF4 40-125/026/A	40	65	80	320	360	704	540	800	130	60	212	140	352	M16	61	A1
GFHF4 40-125/036/A	40	65	80	320	360	704	540	800	130	60	212	140	352	M16	64	A1
GFHF4 40-160/036/A	40	65	80	320	360	704	540	800	130	60	232	160	392	M16	65	A1
GFHF4 40-160/056/A	40	65	80	320	360	746	540	800	130	60	232	160	392	M16	66	A2
GFHF4 40-200/076/C	40	65	100	350	390	734	600	900	150	60	260	180	440	M16	74	A2
GFHF4 40-200/116/P	40	65	100	350	390	811	600	900	150	60	260	180	440	M16	82	A3
GFHF4 40-250/116/P	40	65	100	400	450	811	660	1000	170	75	280	225	505	M20	109	A3
GFHF4 40-250/156/P	40	65	100	400	450	811	660	1000	170	75	280	225	505	M20	112	A3
GFHF4 40-250/226/P	40	65	100	400	450	888	660	1000	170	75	280	225	505	M20	135	B1
GFHF4 50-125/036/A	50	65	100	320	360	724	540	800	130	60	232	160	392	M16	64	A1
GFHF4 50-125/056/A	50	65	100	320	360	766	540	800	130	60	232	160	392	M16	66	A2
GFHF4 50-160/076/C	50	65	100	350	390	734	600	900	150	60	260	180	440	M16	74	A2
GFHF4 50-160/116/P	50	65	100	350	390	811	600	900	150	60	260	180	440	M16	82	A3
GFHF4 50-200/116/P	50	65	100	350	390	811	600	900	150	60	260	200	460	M16	93	A3
GFHF4 50-200/156/P	50	65	100	350	390	811	600	900	150	60	260	200	460	M16	96	A3
GFHF4 50-250/226A/P	50	65	100	400	450	888	660	1000	170	75	280	225	505	M20	137	B1
GFHF4 50-250/226/P	50	65	100	400	450	888	660	1000	170	75	280	225	505	M20	137	B1
GFHF4 50-250/306/P	50	65	100	400	450	888	660	1000	170	75	280	225	505	M20	141	B1
GFHF4 65-125/076/C	65	80	100	350	390	734	600	900	150	75	260	180	440	M16	92	A2
GFHF4 65-125/116/P	65	80	100	350	390	811	600	900	150	75	260	180	440	M16	101	A3
GFHF4 65-160/116/P	65	80	100	400	450	811	660	1000	170	75	260	200	460	M20	106	A3
GFHF4 65-160/156/P	65	80	100	400	450	811	660	1000	170	75	260	200	460	M20	116	A3
GFHF4 65-160/226/P	65	80	100	400	450	888	660	1000	170	75	260	200	460	M20	135	B1
GFHF4 65-200/226/P	65	80	100	440	490	888	740	1120	190	75	280	225	505	M20	139	B1
GFHF4 65-200/306/P	65	80	100	440	490	888	740	1120	190	75	280	225	505	M20	142	B1
GFHF4 65-250/306/P	65	80	100	440	490	998	740	1120	190	90	310	250	550	M20	166	C3
GFHF4 65-250/406/P	65	80	100	440	490	1031	740	1120	190	90	310	250	550	M20	182	C3
GFHF4 65-250/556/P	65	80	100	440	490	1058	740	1120	190	90	310	250	550	M20	199	C4
GFHF4 80-160/156/P	80	100	125	400	450	836	660	1000	170	75	280	225	505	M20	136	A3
GFHF4 80-160/226/P	80	100	125	440	490	913	740	1120	190	75	280	225	505	M20	152	B1
GFHF4 80-200/306/P	80	100	125	440	490	1023	740	1120	190	75	280	250	530	M20	171	C3
GFHF4 80-200/406/P	80	100	125	440	490	1056	740	1120	190	75	280	250	530	M20	179	C3
GFHF4 80-250/406/P	80	100	125	490	540	1056	840	1250	205	90	310	280	580	M20	185	C3
GFHF4 80-250/556/P	80	100	125	490	540	1083	840	1250	205	90	310	280	580	M20	199	C4
GFHF4 80-250/756/P	80	100	125	490	540	1083	840	1250	205	90	310	280	580	M20	206	C4

gfh-gfhf4-4p60-en_d_td

GFHF-GFHF4 SERIES MOUNTED ON BASE DIMENSIONS AND WEIGHTS AT 60 Hz

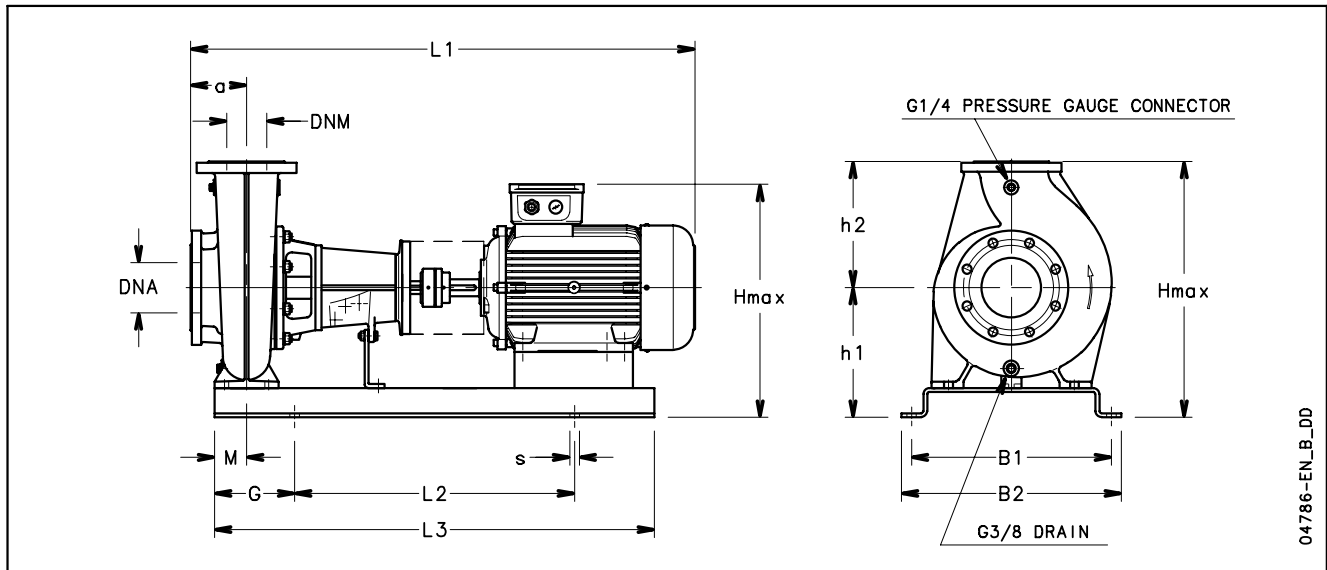

04786-EN_B_DD

GFHF SERIES MOUNTED ON BASE DIMENSIONS AND WEIGHTS AT 60 Hz, 2 POLES

PUMP TYPE	DIMENSIONS (mm)													s FOR SCREWS	WEIGHT kg	COUPLING TYPE
	DNM	DNA	a	B1	B2	L1	L2	L3	G	M	h1	h2	Hmax			
GFHF 100-160/3006/C	100	125	125	500	550	1365	830	1270	220	90	298	280	615	M20	356	E1
GFHF 100-160/3706/C	100	125	125	500	550	1365	830	1270	220	90	298	280	615	M20	385	E1
GFHF 100-160/4506/C	100	125	125	610	670	1454	940	1420	240	90	318	280	702	M24	522	E1
GFHF 100-160/5506/C	100	125	125	610	670	1564	940	1420	240	90	318	280	720	M24	584	F1
GFHF 100-200/3006/C	100	125	125	500	550	1365	830	1270	220	90	273	280	590	M20	361	E1
GFHF 100-200/3706/C	100	125	125	500	550	1365	830	1270	220	90	273	280	590	M20	390	E1
GFHF 100-200/4506/C	100	125	125	610	670	1454	940	1420	240	90	318	280	702	M24	540	E1
GFHF 100-200/5506/C	100	125	125	610	670	1564	940	1420	240	90	343	280	745	M24	582	F1
GFHF 100-200/7506/C	100	125	125	680	740	1670	1050	1570	260	90	373	280	845	M24	839	G1
GFHF 100-250/5506/C	100	125	140	610	670	1578	940	1420	240	90	343	280	745	M24	615	F1
GFHF 100-250/7506/C	100	125	140	680	740	1685	1050	1570	260	90	373	280	845	M24	856	G1
GFHF 100-250/9006/C	100	125	140	680	740	1685	1050	1570	260	90	373	280	845	M24	879	G1

l-gfhf-2p60-en_c_td

GFHF4 SERIES MOUNTED ON BASE

DIMENSIONS AND WEIGHTS AT 60 Hz, 4 POLES


PUMP TYPE	DIMENSIONS (mm)													s FOR SCREWS	WEIGHT kg	COUPLING TYPE
	DNM	DNA	a	B1	B2	L1	L2	L3	G	M	h1	h2	Hmax			
GFHF4 65-315/556/P	65	80	125	500	550	1083	660	1020	180	90	298	280	578	M20	217	C4
GFHF4 65-315/756/P	65	80	125	500	550	1083	660	1020	180	90	298	280	578	M20	224	C4
GFHF4 65-315/1106/P	65	80	125	500	550	1203	660	1020	180	90	298	280	578	M20	286	C5
GFHF4 65-315/1506/P	65	80	125	500	550	1203	700	1100	200	90	298	280	578	M20	289	C5
GFHF4 65-315/1856/C	65	80	125	500	550	1320	830	1270	220	90	298	280	578	M20	327	D2
GFHF4 80-315/1106/P	80	100	125	500	550	1203	700	1100	200	90	323	315	638	M20	307	C5
GFHF4 80-315/1506/P	80	100	125	500	550	1203	700	1100	200	90	323	315	638	M20	310	C5
GFHF4 80-315/1856/C	80	100	125	500	550	1262	830	1270	220	90	323	315	638	M20	343	D2
GFHF4 80-315/2206/C	80	100	125	500	550	1301	830	1270	220	90	323	315	638	M20	365	D2
GFHF4 80-315/3006/C	80	100	125	500	550	1366	830	1270	220	90	323	315	640	M20	401	E1
GFHF4 80-400/2206/C	80	100	125	500	550	1360	830	1270	220	90	353	355	708	M20	413	D3
GFHF4 80-400/3006/C	80	100	125	500	550	1425	830	1270	220	90	353	355	708	M20	450	E2
GFHF4 80-400/3706/C	80	100	125	610	670	1545	940	1420	240	90	373	355	757	M24	588	F2
GFHF4 80-400/4506/C	80	100	125	610	670	1545	940	1420	240	90	373	355	757	M24	609	F2
GFHF4 80-400/5506/C	80	100	125	610	670	1624	940	1420	240	90	373	355	775	M24	690	G2
GFHF4 100-160/406/P	100	125	125	500	550	1056	660	1020	180	90	298	280	578	M20	175	C3
GFHF4 100-160/556/P	100	125	125	500	550	1083	660	1020	180	90	298	280	578	M20	181	C4
GFHF4 100-160/756/P	100	125	125	500	550	1083	660	1020	180	90	298	280	578	M20	185	C4
GFHF4 100-200/406/P	100	125	125	500	550	1056	660	1020	180	90	273	280	553	M20	184	C3
GFHF4 100-200/556/P	100	125	125	500	550	1083	660	1020	180	90	273	280	553	M20	194	C4
GFHF4 100-200/756/P	100	125	125	500	550	1083	660	1020	180	90	273	280	553	M20	198	C4
GFHF4 100-200/1106/P	100	125	125	500	550	1203	700	1100	200	90	272	280	553	M20	262	C5
GFHF4 100-250/1106/P	100	125	140	500	550	1218	700	1100	200	90	298	280	578	M20	280	C5
GFHF4 100-250/1506/P	100	125	140	500	550	1218	700	1100	200	90	298	280	578	M20	277	C5
GFHF4 100-250/1856/C	100	125	140	500	550	1277	830	1270	220	90	298	280	578	M20	328	D2
GFHF4 100-250/2206/C	100	125	140	500	550	1315	830	1270	220	90	298	280	578	M20	350	D2
GFHF4 100-315/2206/C	100	125	140	500	550	1315	830	1270	220	90	323	315	638	M20	372	D2
GFHF4 100-315/3006/C	100	125	140	500	550	1380	830	1270	220	90	323	315	640	M20	411	E1
GFHF4 100-315/3706/C	100	125	140	610	670	1500	940	1420	240	90	343	315	727	M24	565	F1
GFHF4 100-400/3006/C	100	125	140	610	670	1440	940	1420	240	110	373	355	728	M24	502	E2
GFHF4 100-400/3706/C	100	125	140	610	670	1559	940	1420	240	110	373	355	757	M24	623	F2
GFHF4 100-400/4506/C	100	125	140	610	670	1559	940	1420	240	110	373	355	757	M24	644	F2
GFHF4 100-400/5506/C	100	125	140	610	670	1638	940	1420	240	110	373	355	775	M24	725	G2
GFHF4 100-400/7506/C	100	125	140	680	740	1745	1050	1570	260	110	373	355	845	M24	933	H1
GFHF4 125-200/756/P	125	150	140	500	550	1158	700	1100	200	90	323	315	638	M20	242	C7
GFHF4 125-200/1106/P	125	150	140	500	550	1278	830	1270	220	90	323	315	638	M20	310	C8
GFHF4 125-200/1506/P	125	150	140	500	550	1278	830	1270	220	90	323	315	638	M20	313	C8
GFHF4 125-250/1106/P	125	150	140	500	550	1218	700	1100	200	90	323	355	678	M20	306	C5
GFHF4 125-250/1506/P	125	150	140	500	550	1218	700	1100	200	90	323	355	678	M20	309	C5
GFHF4 125-250/1856/C	125	150	140	500	550	1277	700	1100	200	90	323	355	678	M20	342	D2
GFHF4 125-250/2206/C	125	150	140	500	550	1240	830	1270	220	90	323	355	678	M20	373	D2
GFHF4 125-250/3006/C	125	150	140	500	550	1380	830	1270	220	90	323	355	678	M20	409	E1
GFHF4 125-315/3006/C	125	150	140	610	670	1440	940	1420	240	110	373	355	728	M24	483	E2
GFHF4 125-315/3706/C	125	150	140	610	670	1559	940	1420	240	110	373	355	757	M24	604	F2
GFHF4 125-315/4506/C	125	150	140	610	670	1559	940	1420	240	110	373	355	757	M24	615	F2
GFHF4 125-315/5506/C	125	150	140	610	670	1638	940	1420	240	110	373	355	775	M24	696	G2
GFHF4 125-315/7506/C	125	150	140	680	740	1745	1050	1570	260	110	373	355	845	M24	916	H1
GFHF4 125-400/4506/C	125	150	140	610	670	1560	940	1420	240	110	408	400	808	M24	668	F2
GFHF4 125-400/5506/C	125	150	140	610	670	1630	940	1420	240	110	408	400	810	M24	742	G2
GFHF4 125-400/7506/C	125	150	140	680	740	1745	1050	1570	260	110	408	400	880	M24	946	H1
GFHF4 150-250/2206/C	150	200	160	610	670	1400	940	1420	240	110	373	375	748	M24	450	D3
GFHF4 150-250/3006/C	150	200	160	610	670	1465	940	1420	240	110	373	375	748	M24	486	E2
GFHF4 150-250/3706/C	150	200	160	610	670	1584	940	1420	240	110	373	375	757	M24	606	F2
GFHF4 150-250/4506/C	150	200	160	610	670	1584	940	1420	240	110	373	375	757	M24	627	F2
GFHF4 150-315/3706/C	150	200	160	610	670	1579	940	1420	240	110	373	400	773	M24	627	F2
GFHF4 150-315/4506/C	150	200	160	610	670	1579	940	1420	240	110	373	400	773	M24	648	F2
GFHF4 150-315/5506/C	150	200	160	610	670	1659	940	1420	240	110	373	400	775	M24	711	G2
GFHF4 150-315/7506/C	150	200	160	680	740	1765	1050	1570	260	110	373	400	845	M24	942	H1
GFHF4 150-400/5506/C	150	200	160	680	740	1659	1050	1570	260	110	408	450	858	M24	780	G2
GFHF4 150-400/7506/C	150	200	160	680	740	1765	1050	1570	260	110	408	450	880	M24	976	H1

ACCESSORIES

DIMENSIONS OF ROUND THREADED COUNTERFLANGES ACCORDING TO EN 1092-1

DN	ø C	DIMENSIONS (mm)				HOLES		
		ø A	B	ø D	H	ø F	N°	PN
32	Rp 1¼	100	13	140	16	18	4	16
40	Rp 1½	110	14	150	19	18	4	16
50	Rp 2	125	16	165	24	18	4	16
65	Rp 2½	145	16	185	23	18	4	16
80	Rp 3	160	17	200	27	18	8	16
100	Rp 4	180	18	220	31	18	8	16

fh-ctf-tonde-f-en_a_td

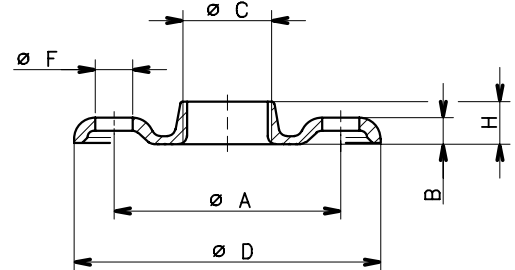


04430_B_DD

DIMENSIONS OF ROUND WELD-ON COUNTERFLANGES ACCORDING TO EN 1092-1

DN	ø C	DIMENSIONS (mm)			HOLES		PN
		ø A	B	ø D	ø F	N°	
65	77	145	18	185	18	4	16
80	90	160	20	200	18	8	16
100	115,5	180	22	220	18	8	16
125	141,5	210	22	250	18	8	16
150	170,5	240	24	285	22	8	16
200	221,5	295	24	340	22	8	10

fh-ctf-tonde-s-en_a_td

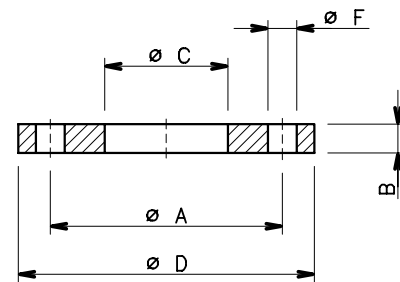


04431_A_DD

AISI 304 FLANGE WITH PRESSURE GAUGE CONNECTOR


DESIGNATION	DIMENSIONS (mm)	
	d	D
25	29	70
32	36	82
40	44	92
50	54	107
65	69	127
80	85	142
100	105	162

fh-fla-manom-en_a_td

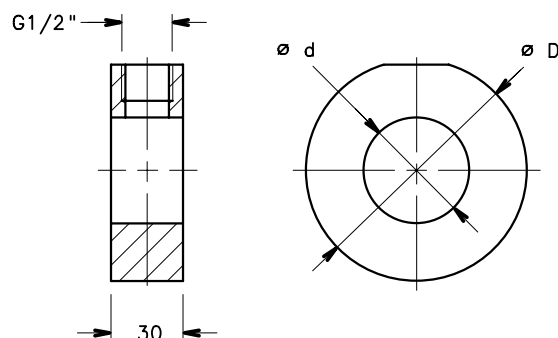

04781_A_DD


FLEXIBLE COUPLING DIMENSIONS

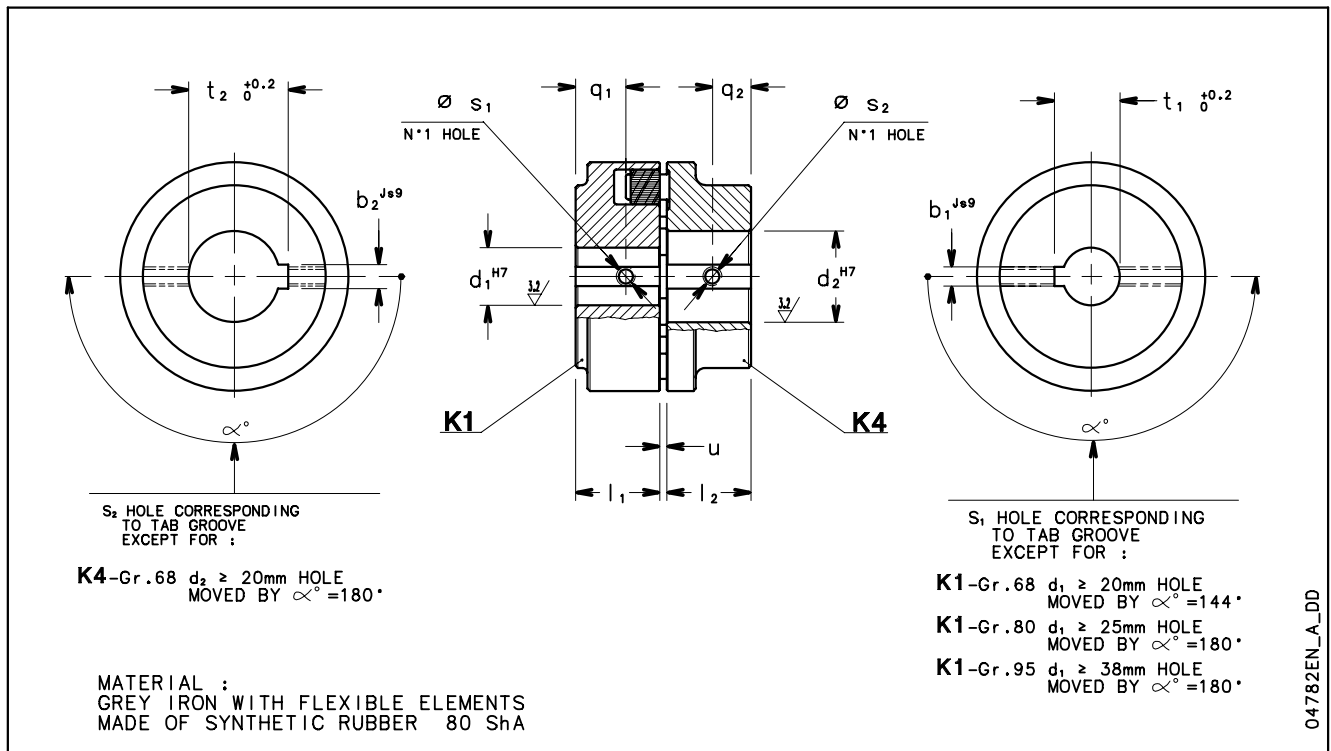

REF.	DENOMINATION	DIMENSIONS (mm)												
		K1							K4					
		PUMP-SIDE HALF COUPLING							MOTOR-SIDE HALF COUPLING					
	SIZE x d_1 x d_2	d_1^{H7}	l_1	b_1^{js9}	$t_1^{+0.2}_0$	s_1	q_1	u	d_2^{H7}	l_2	b_2^{js9}	$t_2^{+0.2}_0$	s_2	q_2
A1	B 68 x 24 x 14	24	20	8	27,3	M6	10	2 ÷ 4	14	20	5	16,3	M6	8
A2	B 68 x 24 x 19	24	20	8	27,3	M6	10	2 ÷ 4	19	20	6	21,8	M6	8
A3	B 68 x 24 x 24	24	20	8	27,3	M6	10	2 ÷ 4	24	20	8	27,3	M6	8
B1	B 80 x 24 x 28	24	30	8	27,3	M6	19	2 ÷ 4	28	30	8	31,3	M6	12
C1	B 95 x 24 x 38	24	35	8	27,3	M6	20	2 ÷ 4	38	35	10	41,3	M6	15
C2	B 95 x 24 x 42	24	35	8	27,3	M6	20	2 ÷ 4	42	35	12	45,3	M6	15
C3	B 95 x 32 x 28	32	35	10	35,3	M6	20	2 ÷ 4	28	35	8	31,3	M6	15
C4	B 95 x 32 x 38	32	35	10	35,3	M6	20	2 ÷ 4	38	35	10	41,3	M6	15
C5	B 95 x 32 x 42	32	35	10	35,3	M6	20	2 ÷ 4	42	35	12	45,3	M6	15
C6	B 95 x 42 x 28	42	35	12	45,3	M6	20	2 ÷ 4	28	35	8	31,3	M6	15
C7	B 95 x 42 x 38	42	35	12	45,3	M6	20	2 ÷ 4	38	35	10	41,3	M6	15
C8	B 95 x 42 x 42	42	35	12	45,3	M6	20	2 ÷ 4	42	35	12	45,3	M6	15
D1	B 110 x 24 x 48	24	40	8	27,3	M6	22	2 ÷ 4	48	40	14	51,8	M6	18
D2	B 110 x 32 x 48	32	40	10	35,3	M6	22	2 ÷ 4	48	40	14	51,8	M6	18
D3	B 110 x 42 x 48	42	40	12	45,3	M6	22	2 ÷ 4	48	40	14	51,8	M6	18
E1	B 125 x 32 x 55	32	50	10	35,3	M8	30	2 ÷ 4	55	50	16	59,3	M8	20
E2	B 125 x 42 x 55	42	50	12	45,3	M8	30	2 ÷ 4	55	50	16	59,3	M8	20
F1	B 140 x 32 x 60	32	55	10	35,3	M8	13	2 ÷ 4	60	55	18	64,4	M8	22
F2	B 140 x 42 x 60	42	55	12	45,3	M8	13	2 ÷ 4	60	55	18	64,4	M8	22
G1	B 160 x 32 x 65	32	60	10	35,3	M10	13	2 ÷ 6	65	60	18	69,4	M10	25
G2	B 160 x 42 x 65	42	60	12	45,3	M10	13	2 ÷ 6	65	60	18	69,4	M10	25
H1	B 180 x 42 x 75	42	70	12	45,3	M12	16	2 ÷ 6	75	70	20	79,9	M12	32

giunto-elastico-en_a_td

MOTOR SHIM FOR GFH 32 ÷ 80 VERSIONS

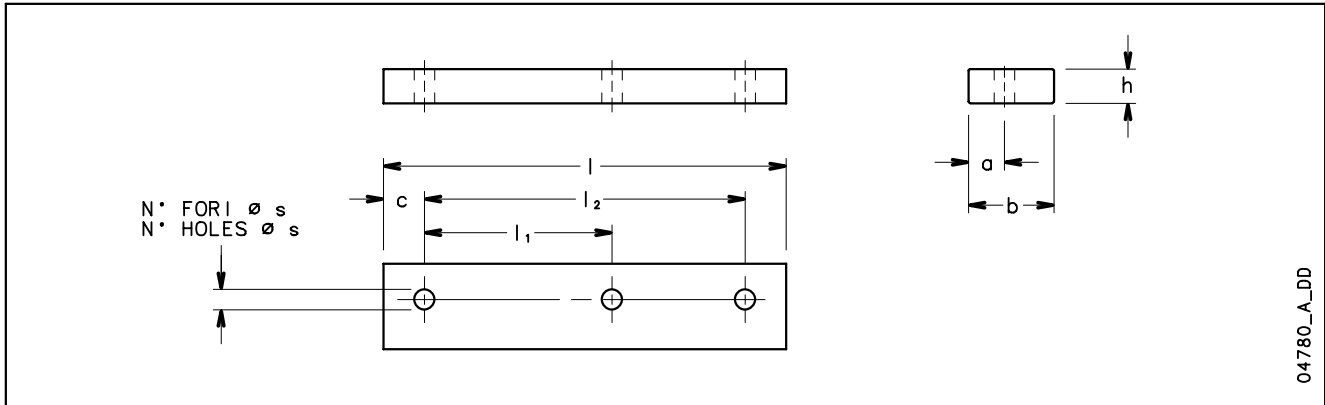


04780_A_DD

DENOMINATION					DIMENSIONS (mm)				HOLES	
b	x	h	x	l	a	l ₁	l ₂	c	N°	Ø s
35	12	125			17	100	-	12,5	2	10
35	20	125			17	100	-	12,5	2	10
40	8	180			17	140	-	20	2	14
40	10	155			20	100	125	15	3	10
40	12	155			20	100	125	15	3	10
40	12	180			17	140	-	20	2	14
40	20	180			17	140	-	20	2	14
40	30	155			20	100	125	15	3	10
40	40	180			17	140	-	20	2	14
50	8	226			21	140	178	24	3	14
50	20	226			21	140	178	24	3	14
50	20	334			20	241	279	35	3	14
50	20	304			25	210	254	25	3	16
80	30	360			26,5	-	311	24,5	2	18
90	30	406			30	-	349	28,5	2	22

sp-piatti-mot-fhf-en_b_td

CYLINDRICAL THICKNESS OF MOTORE (GFHF)

PUMP THICKNESS (GFHF)

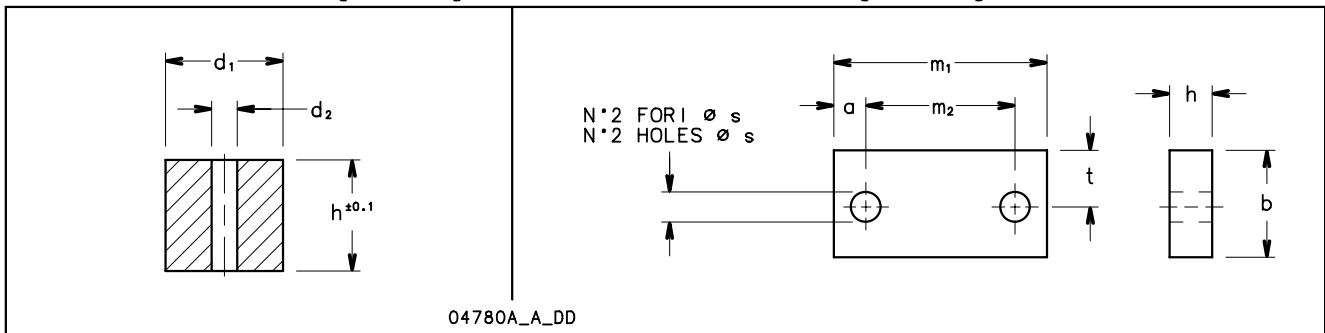

04780A_A_DD

DIMENSIONS (mm)			
DENOMINATION			d ₂
d ₁	x	h	
45	41		10
45	61		10
45	89		10
55	52		12
55	70		12
55	80		12
55	90		12
55	100		12
65	60		16
65	68		16
65	78		16
65	80		16
65	88		16
65	98		16

sp-tondi-mot-fhf-en_a_td

DIMENSIONS (mm)							
DENOMINATION				a	m ₂	Ø s	t
b	x	h	m ₁				
40	10	160		25	110	14	16,5
40	20	160		25	110	14	16,5
40	25	160		25	110	14	16,5
40	30	160		25	110	14	16,5
70	20	125		15	95	14	37,5
80	10	160		20	120	18	42,5
80	25	160		20	120	18	42,5
80	30	160		20	120	18	42,5

sp-pompa-fhf-en_a_td

TECHNICAL APPENDIX

NPSH

The minimum operating values that can be reached at the pump suction end are limited by the onset of cavitation.

Cavitation is the formation of vapour-filled cavities within liquids where the pressure is locally reduced to a critical value, or where the local pressure is equal to, or just below the vapour pressure of the liquid.

The vapour-filled cavities flow with the current and when they reach a higher pressure area the vapour contained in the cavities condenses. The cavities collide, generating pressure waves that are transmitted to the walls. These, being subjected to stress cycles, gradually become deformed and yield due to fatigue. This phenomenon, characterized by a metallic noise produced by the hammering on the pipe walls, is called incipient cavitation.

The damage caused by cavitation may be magnified by electrochemical corrosion and a local rise in temperature due to the plastic deformation of the walls. The materials that offer the highest resistance to heat and corrosion are alloy steels, especially austenitic steel. The conditions that trigger cavitation may be assessed by calculating the total net suction head, referred to in technical literature with the acronym NPSH (Net Positive Suction Head).

The NPSH represents the total energy (expressed in m.) of the liquid measured at suction under conditions of incipient cavitation, excluding the vapour pressure (expressed in m.) that the liquid has at the pump inlet.

To find the static height h_z at which to install the machine under safe conditions, the following formula must be verified:

$$h_p + h_z \geq (\text{NPSH}_r + 0.5) + h_f + h_{pv} \quad (1)$$

where:

- h_p** is the absolute pressure applied to the free liquid surface in the suction tank, expressed in m. of liquid; h_p is the quotient between the barometric pressure and the specific weight of the liquid.
- h_z** is the suction lift between the pump axis and the free liquid surface in the suction tank, expressed in m.; h_z is negative when the liquid level is lower than the pump axis.
- h_f** is the flow resistance in the suction line and its accessories, such as: fittings, foot valve, gate valve, elbows, etc.
- h_{pv}** is the vapour pressure of the liquid at the operating temperature, expressed in m. of liquid. h_{pv} is the quotient between the P_v vapour pressure and the liquid's specific weight.
- 0,5** is the safety factor.

The maximum possible suction head for installation depends on the value of the atmospheric pressure (i.e. the elevation above sea level at which the pump is installed) and the temperature of the liquid.

To help the user, with reference to water temperature (4° C) and to the elevation above sea level, the following tables show the drop in hydraulic pressure head in relation to the elevation above sea level, and the suction loss in relation to temperature.

Water temperature (°C)	20	40	60	80	90	110	120
Suction loss (m)	0,2	0,7	2,0	5,0	7,4	15,4	21,5

Elevation above sea level (m)	500	1000	1500	2000	2500	3000
Suction loss (m)	0,55	1,1	1,65	2,2	2,75	3,3

Friction loss is shown in the tables at pages 126-127 of this catalogue. To reduce it to a minimum, especially in cases of high suction head (over 4-5 m.) or within the operating limits with high flow rates, we recommend using a suction line having a larger diameter than that of the pump's suction port. It is always a good idea to position the pump as close as possible to the liquid to be pumped.

Make the following calculation:

Liquid: water at ~15°C $\gamma = 1 \text{ kg/dm}^3$

Flow rate required: 30 m³/h

Head for required delivery: 43 m.

Suction lift: 3,5 m.

The selection is an GFHE 40-200/75 pump whose NPSH required value is, at 30 m³/h, di 2,5 m.

For water at 15 °C

$$h_p = P_a / \gamma = 10,33\text{m}, h_{pv} = P_v / \gamma = 0,174\text{m} (0,01701 \text{ bar})$$

The H_f flow resistance in the suction line with foot valves is ~ 1,2 m.

By substituting the parameters in formula (1) with the numeric values above, we have:

$$10,33 + (-3,5) \geq (2,5 + 0,5) + 1,2 + 0,17$$

from which we have: 6,8 > 4,4

The relation is therefore verified.

TECHNICAL APPENDIX VAPOUR PRESSURE PS VAPOUR PRESSURE AND ρ DENSITY OF WATER TABLE

t °C	T K	ps bar	ρ kg/dm ³	t °C	T K	ps bar	ρ kg/dm ³	t °C	T K	ps bar	ρ kg/dm ³
0	273,15	0,00611	0,9998	55	328,15	0,15741	0,9857	120	393,15	1,9854	0,9429
1	274,15	0,00657	0,9999	56	329,15	0,16511	0,9852	122	395,15	2,1145	0,9412
2	275,15	0,00706	0,9999	57	330,15	0,17313	0,9846	124	397,15	2,2504	0,9396
3	276,15	0,00758	0,9999	58	331,15	0,18147	0,9842	126	399,15	2,3933	0,9379
4	277,15	0,00813	1,0000	59	332,15	0,19016	0,9837	128	401,15	2,5435	0,9362
5	278,15	0,00872	1,0000	60	333,15	0,1992	0,9832	130	403,15	2,7013	0,9346
6	279,15	0,00935	1,0000	61	334,15	0,2086	0,9826	132	405,15	2,867	0,9328
7	280,15	0,01001	0,9999	62	335,15	0,2184	0,9821	134	407,15	3,041	0,9311
8	281,15	0,01072	0,9999	63	336,15	0,2286	0,9816	136	409,15	3,223	0,9294
9	282,15	0,01147	0,9998	64	337,15	0,2391	0,9811	138	411,15	3,414	0,9276
10	283,15	0,01227	0,9997	65	338,15	0,2501	0,9805	140	413,15	3,614	0,9258
11	284,15	0,01312	0,9997	66	339,15	0,2615	0,9799	145	418,15	4,155	0,9214
12	285,15	0,01401	0,9996	67	340,15	0,2733	0,9793	155	428,15	5,433	0,9121
13	286,15	0,01497	0,9994	68	341,15	0,2856	0,9788	160	433,15	6,181	0,9073
14	287,15	0,01597	0,9993	69	342,15	0,2984	0,9782	165	438,15	7,008	0,9024
15	288,15	0,01704	0,9992	70	343,15	0,3116	0,9777	170	443,15	7,920	0,8973
16	289,15	0,01817	0,9990	71	344,15	0,3253	0,9770	175	448,15	8,924	0,8921
17	290,15	0,01936	0,9988	72	345,15	0,3396	0,9765	180	453,15	10,027	0,8869
18	291,15	0,02062	0,9987	73	346,15	0,3543	0,9760	185	458,15	11,233	0,8815
19	292,15	0,02196	0,9985	74	347,15	0,3696	0,9753	190	463,15	12,551	0,8760
20	293,15	0,02337	0,9983	75	348,15	0,3855	0,9748	195	468,15	13,987	0,8704
21	294,15	0,24850	0,9981	76	349,15	0,4019	0,9741	200	473,15	15,550	0,8647
22	295,15	0,02642	0,9978	77	350,15	0,4189	0,9735	205	478,15	17,243	0,8588
23	296,15	0,02808	0,9976	78	351,15	0,4365	0,9729	210	483,15	19,077	0,8528
24	297,15	0,02982	0,9974	79	352,15	0,4547	0,9723	215	488,15	21,060	0,8467
25	298,15	0,03166	0,9971	80	353,15	0,4736	0,9716	220	493,15	23,198	0,8403
26	299,15	0,03360	0,9968	81	354,15	0,4931	0,9710	225	498,15	25,501	0,8339
27	300,15	0,03564	0,9966	82	355,15	0,5133	0,9704	230	503,15	27,976	0,8273
28	301,15	0,03778	0,9963	83	356,15	0,5342	0,9697	235	508,15	30,632	0,8205
29	302,15	0,04004	0,9960	84	357,15	0,5557	0,9691	240	513,15	33,478	0,8136
30	303,15	0,04241	0,9957	85	358,15	0,5780	0,9684	245	518,15	36,523	0,8065
31	304,15	0,04491	0,9954	86	359,15	0,6011	0,9678	250	523,15	39,776	0,7992
32	305,15	0,04753	0,9951	87	360,15	0,6249	0,9671	255	528,15	43,246	0,7916
33	306,15	0,05029	0,9947	88	361,15	0,6495	0,9665	260	533,15	46,943	0,7839
34	307,15	0,05318	0,9944	89	362,15	0,6749	0,9658	265	538,15	50,877	0,7759
35	308,15	0,05622	0,9940	90	363,15	0,7011	0,9652	270	543,15	55,058	0,7678
36	309,15	0,05940	0,9937	91	364,15	0,7281	0,9644	275	548,15	59,496	0,7593
37	310,15	0,06274	0,9933	92	365,15	0,7561	0,9638	280	553,15	64,202	0,7505
38	311,15	0,06624	0,9930	93	366,15	0,7849	0,9630	285	558,15	69,186	0,7415
39	312,15	0,06991	0,9927	94	367,15	0,8146	0,9624	290	563,15	74,461	0,7321
40	313,15	0,07375	0,9923	95	368,15	0,8453	0,9616	295	568,15	80,037	0,7223
41	314,15	0,07777	0,9919	96	369,15	0,8769	0,9610	300	573,15	85,927	0,7122
42	315,15	0,08198	0,9915	97	370,15	0,9094	0,9602	305	578,15	92,144	0,7017
43	316,15	0,09639	0,9911	98	371,15	0,9430	0,9596	310	583,15	98,70	0,6906
44	317,15	0,09100	0,9907	99	372,15	0,9776	0,9586	315	588,15	105,61	0,6791
45	318,15	0,09582	0,9902	100	373,15	1,0133	0,9581	320	593,15	112,89	0,6669
46	319,15	0,10086	0,9898	102	375,15	1,0878	0,9567	325	598,15	120,56	0,6541
47	320,15	0,10612	0,9894	104	377,15	1,1668	0,9552	330	603,15	128,63	0,6404
48	321,15	0,11162	0,9889	106	379,15	1,2504	0,9537	340	613,15	146,05	0,6102
49	322,15	0,11736	0,9884	108	381,15	1,3390	0,9522	350	623,15	165,35	0,5743
50	323,15	0,12335	0,9880	110	383,15	1,4327	0,9507	360	633,15	186,75	0,5275
51	324,15	0,12961	0,9876	112	385,15	1,5316	0,9491	370	643,15	210,54	0,4518
52	325,15	0,13613	0,9871	114	387,15	1,6362	0,9476	374,15	647,30	221,20	0,3154
53	326,15	0,14293	0,9862	116	389,15	1,7465	0,9460				
54	327,15	0,15002	0,9862	118	391,15	1,8628	0,9445				

G-at_nps_h_a_sc

TABLE OF FLOW RESISTANCE IN 100 m OF STRAIGHT CAST IRON PIPELINE (HAZEN-WILLIAMS FORMULA C=100)

FLOW RATE		NOMINAL DIAMETER in mm and INCHES																	
m ³ /h	l/min		15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400
			1/2"	3/4"	1"	1 1/4"	1 1/2"	2	2 1/2"	3"	4"	5"	6"	7"	8"	10"	12"	14"	16"
0,6	10	v	0,94	0,53	0,34	0,21	0,13			The hr values must be multiplied by: 0.71 for galvanized or painted steel pipes 0.54 for stainless steel or copper pipes 0.47 for PVC or PE pipes									
		hr	16	3,94	1,33	0,40	0,13												
0,9	15	v	1,42	0,80	0,51	0,31	0,20												
		hr	33,9	8,35	2,82	0,85	0,29												
1,2	20	v	1,89	1,06	0,68	0,41	0,27	0,17											
		hr	57,7	14,21	4,79	1,44	0,49	0,16											
1,5	25	v	2,36	1,33	0,85	0,52	0,33	0,21											
		hr	87,2	21,5	7,24	2,18	0,73	0,25											
1,8	30	v	2,83	1,59	1,02	0,62	0,40	0,25											
		hr	122	30,1	10,1	3,05	1,03	0,35											
2,1	35	v	3,30	1,86	1,19	0,73	0,46	0,30											
		hr	162	40,0	13,5	4,06	1,37	0,46											
2,4	40	v		2,12	1,36	0,83	0,53	0,34	0,20										
		hr		51,2	17,3	5,19	1,75	0,59	0,16										
3	50	v		2,65	1,70	1,04	0,66	0,42	0,25										
		hr		77,4	26,1	7,85	2,65	0,89	0,25										
3,6	60	v		3,18	2,04	1,24	0,80	0,51	0,30										
		hr		108	36,6	11,0	3,71	1,25	0,35										
4,2	70	v		3,72	2,38	1,45	0,93	0,59	0,35										
		hr		144	48,7	14,6	4,93	1,66	0,46										
4,8	80	v		4,25	2,72	1,66	1,06	0,68	0,40										
		hr		185	62,3	18,7	6,32	2,13	0,59										
5,4	90	v			3,06	1,87	1,19	0,76	0,45	0,30									
		hr			77,5	23,3	7,85	2,65	0,74	0,27									
6	100	v			3,40	2,07	1,33	0,85	0,50	0,33									
		hr			94,1	28,3	9,54	3,22	0,90	0,33									
7,5	125	v			4,25	2,59	1,66	1,06	0,63	0,41									
		hr			142	42,8	14,4	4,86	1,36	0,49									
9	150	v				3,11	1,99	1,27	0,75	0,50	0,32								
		hr				59,9	20,2	6,82	1,90	0,69	0,23								
10,5	175	v				3,63	2,32	1,49	0,88	0,58	0,37								
		hr				79,7	26,9	9,07	2,53	0,92	0,31								
12	200	v				4,15	2,65	1,70	1,01	0,66	0,42								
		hr				102	34,4	11,6	3,23	1,18	0,40								
15	250	v				5,18	3,32	2,12	1,26	0,83	0,53	0,34							
		hr				154	52,0	17,5	4,89	1,78	0,60	0,20							
18	300	v				3,98	2,55	1,51	1,00	0,64	0,41								
		hr				72,8	24,6	8,85	2,49	0,84	0,28								
24	400	v					5,31	3,40	2,01	1,33	0,85	0,54	0,38						
		hr					124	41,8	11,66	4,24	1,43	0,48	0,20						
30	500	v				6,63	4,25	2,51	1,66	1,06	0,68	0,47							
		hr				187	63,2	17,6	6,41	2,16	0,73	0,30							
36	600	v					5,10	3,02	1,99	1,27	0,82	0,57	0,42						
		hr					88,6	24,7	8,98	3,03	1,02	0,42	0,20						
42	700	v					5,94	3,52	2,32	1,49	0,95	0,66	0,49						
		hr					118	32,8	11,9	4,03	1,36	0,56	0,26						
48	800	v					6,79	4,02	2,65	1,70	1,09	0,75	0,55						
		hr					151	42,0	15,3	5,16	1,74	0,72	0,34						
54	900	v					7,64	4,52	2,99	1,91	1,22	0,85	0,62						
		hr					188	52,3	19,0	6,41	2,16	0,89	0,42						
60	1000	v					5,03	3,32	2,12	1,36	0,94	0,69	0,53						
		hr					63,5	23,1	7,79	2,63	1,08	0,51	0,27						
75	1250	v					6,28	4,15	2,65	1,70	1,18	0,87	0,66						
		hr					96,0	34,9	11,8	3,97	1,63	0,77	0,40						
90	1500	v					7,54	4,98	3,18	2,04	1,42	1,04	0,80						
		hr					134	48,9	16,5	5,57	2,29	1,08	0,56						
105	1750	v					8,79	5,81	3,72	2,38	1,65	1,21	0,93						
		hr					179	65,1	21,9	7,40	3,05	1,44	0,75						
120	2000	v					6,63	4,25	2,72	1,89	1,39	1,06	0,80			0,68			
		hr					83,3	28,1	9,48	3,90	1,84	0,96	0,32			0,32			
150	2500	v					8,29	5,31	3,40	2,36	1,73	1,33	0,85						
		hr					126	42,5	14,3	5,89	2,78	1,45	0,49						
180	3000	v						6,37	4,08	2,83	2,08	1,59	1,02			1,02			
		hr						59,5	20,1	8,26	3,90	2,03	0,69			0,69		0,71	
210	3500	v							7,43	4,76	3,30	2,43	1,86			1,19		0,83	
		hr							79,1	26,7	11,0	5,18	2,71			0,91		0,38	
240	4000	v							8,49	5,44	3,77	2,77	2,12			1,36		0,94	
		hr							101	34,2	14,1	6,64	3,46			1,17		0,48	
300	5000	v								6,79	4,72	3,47	2,65			1,70		1,18	
		hr								51,6	21,2	10,0	5,23			1,77		0,73	
360	6000	v								8,15	5,66	4,16	3,18			2,04		1,42	
		hr								72,3	29,8	14,1	7,33			2,47		1,02	
420	7000	v									6,61	4,85	3,72			2,38		1,65	
		hr									39,6	18,7	9,75			3,29		1,35	
480	8000	v									7,55	5,55	4,25			2,72		1,89	
		hr									50,7	23,9	12,49			4,21		1,73	
540	9000	v									8,49	6,24	4,78			3,06		2,12	
		hr									63,0	29,8	15,5			5,24		2,16	
600	10000	v										6,93	5,31			3,40		2,36	
		hr										36,2	18,9			6,36		2,62	

G-at-pct_a_th

hr = flow resistance for 100m of straight pipeline (m)

V = water speed (m/s)

FLOW RESISTANCE

TABLE OF FLOW RESISTANCE IN BENDS, VALVES AND GATES

The flow resistance is calculated using the equivalent pipeline length method according to the table below:

ACCESSORY TYPE	DN											
	25	32	40	50	65	80	100	125	150	200	250	300
	Equivalent pipeline length (m)											
45° bend	0,2	0,2	0,4	0,4	0,6	0,6	0,9	1,1	1,5	1,9	2,4	2,8
90° bend	0,4	0,6	0,9	1,1	1,3	1,5	2,1	2,6	3,0	3,9	4,7	5,8
90° smooth bend	0,4	0,4	0,4	0,6	0,9	1,1	1,3	1,7	1,9	2,8	3,4	3,9
Union tee or cross	1,1	1,3	1,7	2,1	2,6	3,2	4,3	5,3	6,4	7,5	10,7	12,8
Gate	-	-	-	0,2	0,2	0,2	0,4	0,4	0,6	0,9	1,1	1,3
Non return valve	1,1	1,5	1,9	2,4	3,0	3,4	4,7	5,9	7,4	9,6	11,8	13,9

G-a-pcv_a_th

The table is valid for the Hazen Williams coefficient $C = 100$ (cast iron pipework). For steel pipework, multiply the values by 1.41. For stainless steel, copper and coated cast iron pipework, multiply the values by 1.85.

When the **equivalent pipeline length** has been determined, the flow resistance is obtained from the table of flow resistance.

The values given are guideline values which are bound to vary slightly according to the model, especially for gate valves and non-return valves, for which it is a good idea to check the values supplied by the manufacturers.

VOLUMETRIC CAPACITY

Litres per minute l/min	Cubic metres per hour m ³ /h	Cubic feet per hour ft ³ /h	Cubic feet per minute ft ³ /min	Imp. gal. per minute Imp. gal./min	US gal. per minute Us gal./min
1,0000	0,0600	2,1189	0,0353	0,2200	0,2642
16,6667	1,0000	35,3147	0,5886	3,6662	4,4029
0,4719	0,0283	1,0000	0,0167	0,1038	0,1247
28,3168	1,6990	60,0000	1,0000	6,2288	7,4805
4,5461	0,2728	9,6326	0,1605	1,0000	1,2009
3,7854	0,2271	8,0208	0,1337	0,8327	1,0000

PRESSURE AND HEAD

Newton per square metre N/m ²	kilo Pascal kPa	bar bar	Pound force per square inch psi	metre of water m H ₂ O	millimetre of mercury mm Hg
1,0000	0,0010	1 x 10 ⁻⁵	1.45 x 10 ⁻⁴	1.02 x 10 ⁻⁴	0,0075
1000,0000	1,0000	0,0100	0,1450	0,1020	7,5006
1 x 10 ⁵	100,0000	1,0000	14,5038	10,1972	750,0638
6894,7570	6,8948	0,0689	1,0000	0,7031	51,7151
9806,6500	9,8067	0,0981	1,4223	1,0000	73,5561
133,3220	0,1333	0,0013	0,0193	0,0136	1,0000

LENGTH

millimetre mm	centimetre cm	metre m	inch in	foot ft	yard yd
1,0000	0,1000	0,0010	0,0394	0,0033	0,0011
10,0000	1,0000	0,0100	0,3937	0,0328	0,0109
1000,0000	100,0000	1,0000	39,3701	3,2808	1,0936
25,4000	2,5400	0,0254	1,0000	0,0833	0,0278
304,8000	30,4800	0,3048	12,0000	1,0000	0,3333
914,4000	91,4400	0,9144	36,0000	3,0000	1,0000

VOLUME

cubic metre m ³	litre litro	millilitre ml	imp. Gallon imp. gal.	US gallon US gal.	cubic foot ft ³
1,0000	1000,0000	1 x 10 ⁶	219,9694	264,1720	35,3147
0,0010	1,0000	1000,0000	0,2200	0,2642	0,0353
1 x 10 ⁻⁶	0,0010	1,0000	2.2 x 10 ⁻⁴	2.642 x 10 ⁻⁴	3.53 x 10 ⁻⁵
0,0045	4,5461	4546,0870	1,0000	1,2009	0,1605
0,0038	3,7854	3785,4120	0,8327	1,0000	0,1337
0,0283	28,3168	28316,8466	6,2288	7,4805	1,0000

G-at_pp-en_a_sc

Xylem |'zīləm|

- 1) The tissue in plants that brings water upward from the roots;
- 2) a leading global water technology company.

We're 12,000 people unified in a common purpose: creating innovative solutions to meet our world's water needs. Developing new technologies that will improve the way water is used, conserved, and re-used in the future is central to our work. We move, treat, analyze, and return water to the environment, and we help people use water efficiently, in their homes, buildings, factories and farms. In more than 150 countries, we have strong, long-standing relationships with customers who know us for our powerful combination of leading product brands and applications expertise, backed by a legacy of innovation.

For more information on how Xylem can help you, go to xyleminc.com.



Headquarters

XYLEM WATER SYSTEMS USA LLC

1 Goulds Drive

Auburn, NY 13021 - U.S.A.

Phone: +1 (800) 453-6777

Fax: +1 (888) 322-5877

Goulds is a registered trademark of Goulds Pumps, Inc. and is used under license.
© 2012 Xylem Inc.