

Drainex 200/300 Drainage



Submersible monobloc pumps, Vortex system for sewage water

Applications

Drainage of sewage and dirty water, operation in septic tanks and small purifying installations.

Materials

Pump body, discharge body, suction body and impeller in cast iron.
Mechanical seal in silicon carbide and ceramic.
Pump base in stainless steel AISI 304, detachable for coupling of accessories.
O-rings in NBR.
Motor shaft in stainless steel AISI 420.

Motor

Asynchronous, two poles, high torque.
IP 68 protection.
Class F insulation.
Continuous operation.
Water-cooled motor.
Single phase version built-in thermal protection and capacitor.

Limitations

Maximum solids handling:

Drainex 200: 45 mm.

Drainex 300: 60 mm.

Maximum liquid temperature: 40 °C.

Equipment

Supplied with 10 m power cable.

Drainex M: without float switch.

Drainex M A: with float switch.

Drainex T: three phase without float switch.

Transportable versions include elbow and s/s feet.




Hydraulic performance table

Model	I [A]		P1 [kW]		P2		c	l/min	50	100	200	300	400	500	1~230V M	1~230V MA	3~400V
	1~ 230 V	3~ 400 V	1~ 230 V	3~ 400 V	[kW]	[HP]	[μF]	m³/h	3.0	6.0	12	18	24	30	Code	Code	Code
Drainex 200	5.4	2.3	1.1	1.1	1.1	1.5	16	mwc	10.7	9.7	7.4	4.9	2.3		00096652	00096654	00096648
Drainex 201	6.6	2.6	1.4	1.4	1.1	1.5	16		13.2	11.9	9.4	6.7	3.8		00096664	00096666	00096662
Drainex 202	7.4	2.8	1.6	1.6	1.1	1.5	16		15.1	13.8	11.3	8.5	5.6	2.5	00096674	00096676	00096672

Model	I [A]		P1 [kW]		P2		c	l/min	50	100	200	400	500	650	1~230V M	1~230V MA	3~400V
	1~ 230 V	3~ 400 V	1~ 230 V	3~ 400 V	[kW]	[HP]			[μF]	m³/h	3.0	6.0	12	24	30	39	Code
Drainex 300	5.50	2.4	1.2	1.2	1.1	1.5	16	mwc	7.1	6.6	5.4	2.9	1.8		00096684	00096686	00096682
Drainex 301	6.80	2.7	1.5	1.5	1.1	1.5	12		9.2	8.5	7	4.1	2.8		00096694	00096696	00096692
Drainex 302	7.20	3	1.8	1.8	1.1	1.5	12		11	10.5	9	5.8	4.2	1.8	00096704	00096706	00096702


Elbow flange set (P.O.A)

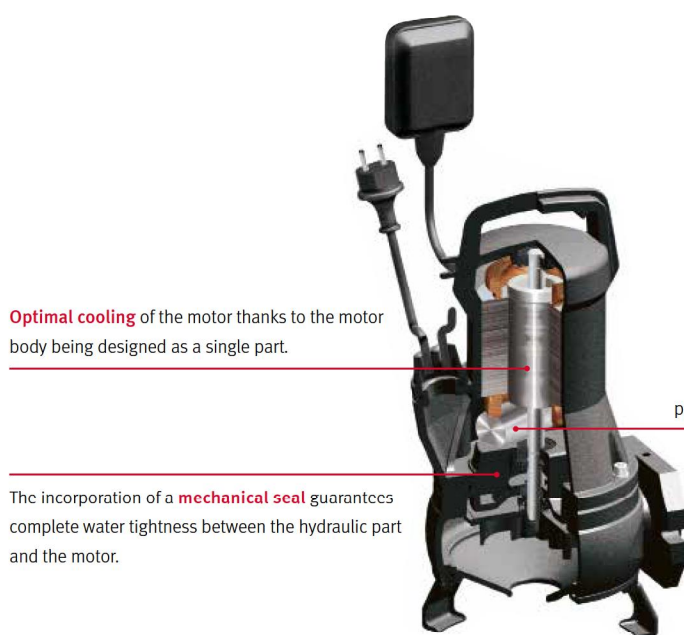

Optimal cooling of the motor thanks to the motor body being designed as a single part.

The incorporation of a **mechanical seal** guarantees complete water tightness between the hydraulic part and the motor.


Interior condenser is in a completely watertight chamber to simplify the pump installation process.




Large chamber between the Impeller and the aspiration cone which allows suspended solid particles to pass through. Drainex 200, 45 mm. and Drainex 300, 60 mm.

Performance curves at 2900 rpm

Drainex 200

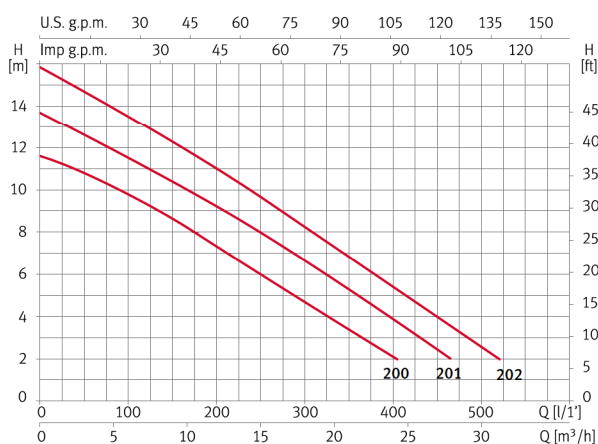

Drainex 300

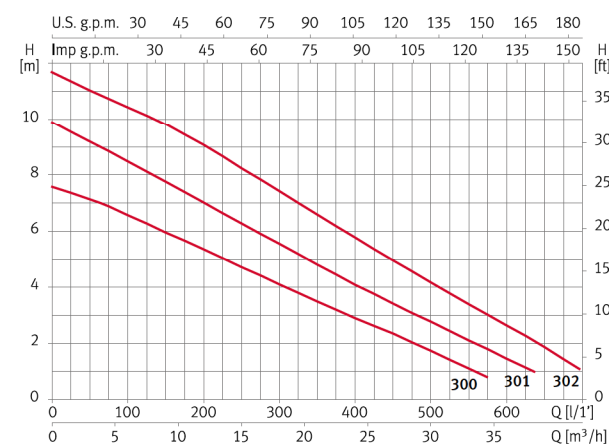


Dimensions and weights

Drainex 200/201/202

Model	A	B	C	D	E	F	G	H	I	[Kg]
Drainex 200	415	239.5	383	118.7	2"	110	196	95	12	25
Drainex 201	415	239.5	383	118.7	2"	110	196	95	12	25
Drainex 202	415	239.5	383	118.7	2"	110	196	95	12	25


Impeller ext. Ø: Drainex 200: 105 mm. Drainex 201: 115 mm. Drainex 202: 124 mm.

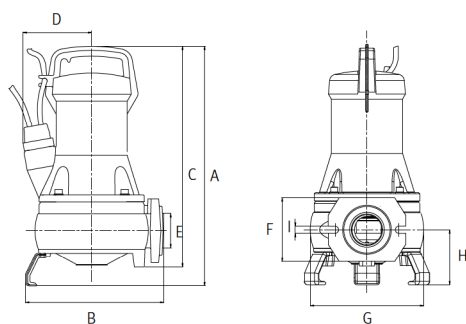

Drainex 300/301/302

Model	A	B	C	D	E	F	G	H	I	J	[Kg]
Drainex 300	429	271.5	408	118.7	222	110	150	110	144	2 1/2"	28
Drainex 301	429	271.5	408	118.7	222	110	150	110	144	2 1/2"	28
Drainex 302	429	271.5	408	118.7	222	110	150	110	144	2 1/2"	28

Impeller ext. Ø: Drainex 300: 105 mm. Drainex 301: 115 mm. Drainex 302: 124 mm.

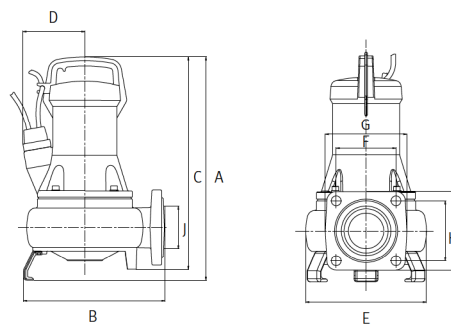


Drainex 200/300 Drainage



Portable version

Drainex 200/201/202

A	B	C	D	E	F	G	H	I	J	K	L	M
437	338	110	219	62	95	49	98	98	134	110	55	55

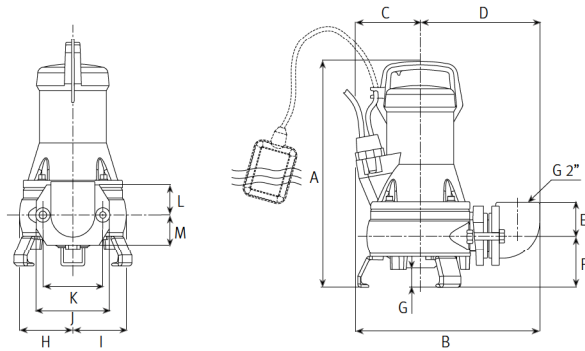


Passage Ø of particles in suspension: 45mm

Drainex 200/300: without float switch. Drainex 200 A/300 A: supplied built-in float switch

Drainex 300/301/302

A	B	C	D	E	F	G	H	I	J	K	L	M
455	373	108	213	105	101	62	111	111	150	110	110	144

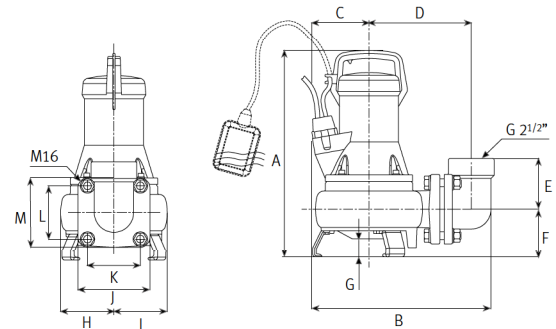


Fixed version, guide rail system

Drainex 200/201/202

A	B	C	D	E	F	G	H	I	J	K	L	M
388	353	110	168	60	112	60	52	8	12	50,5	Ø10	24

N	O	P	Q	R	S	T	U	V	W	X	Y	Z
209	Ø25	85	Ø10	98	98	120	94	12	40	13	32	60

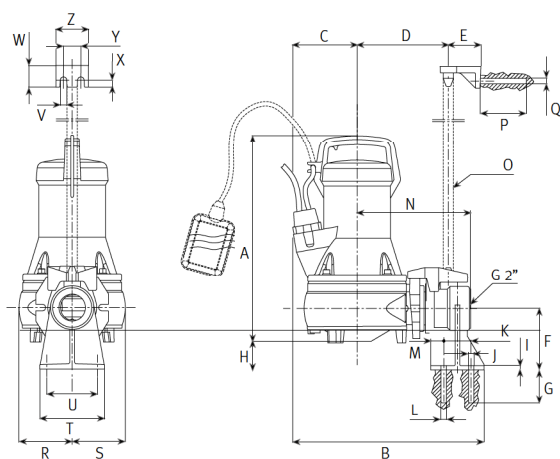


Passage Ø of particles in suspension: 60mm

Drainex 200/300: without float switch. Drainex 200 A/300 A: supplied built-in float switch

Drainex 300/301/302

A	B	C	D	E	F	G	H	I	J	K	L	M
405	441	108	245,5	92	132	11,5	74,5	15	38	70	Ø12	85

N	O	P	Q	R	S	T	U	V	W	X	Y	Z
12	Ø42	85	Ø10	111	111	104	56	11	50,5	20,5	50	95

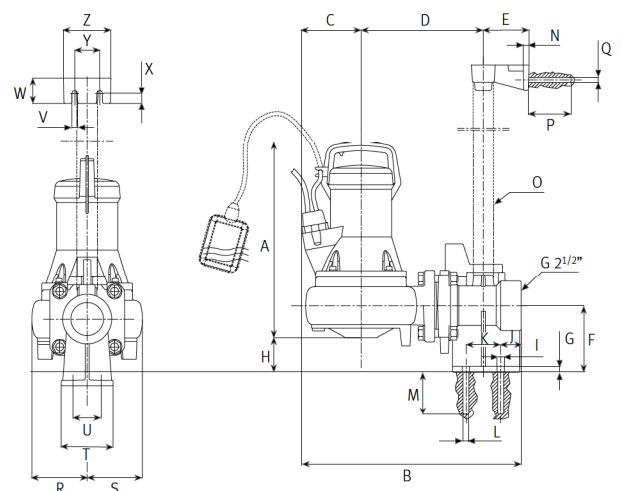

*Service kits are available on request