

**Aplicaciones:**

Suministro de agua a presión en viviendas unifamiliares. Cabinas de hidromasaje.

Applications:

Pressurised water supply for detached houses.



Tecno 05

Bombas centrífugas multicelulares horizontales, completamente silenciosas.

Materiales:

Cuerpo bomba e impulsores en acero inoxidable AISI 304.
Difusores en tecnopolímero.
Juntas tóricas en EPDM y NBR.
Cierre mecánico en grafito y esteatita.
Pie bomba, brida motor y carcasa motor en aluminio.

Motor:

Asincrónico, dos polos.
Protección IP 55.
Aislamiento clase F.
Servicio continuo.
Protección térmica incorporada.

Quiet running horizontal multistage centrifugal pumps.

Materials:

Pump body and impellers in stainless steel AISI 304.
Diffusers in tecnopolimer.
Mechanical seal in graphite and steatite.
O'rings in EPDM and NBR.
Pump base, motor flange and motor housing in aluminium.


Motor:

Asynchronous, two poles.
IP 55 protection.
Class F insulation.
Continuous operation.
Built-in thermal protection.







Tecno 05

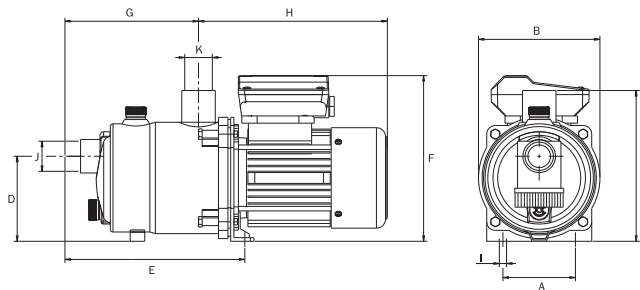

	A	B	C	D	E	F	G	H	I	J	K	Kg
Tecno 05 2	80	136	157.5	94	176.3	174	123.8	225	9	1"	1"	5.2
Tecno 05 3	80	136	157.5	94	194.2	174	141.7	225	9	1"	1"	6.2
Tecno 05 4	80	136	157.5	94	211.5	174	159	225	9	1"	1"	6.3

Curvas de funcionamiento a 2900 r.p.m.
Performance curves at 2900 r.p.m.

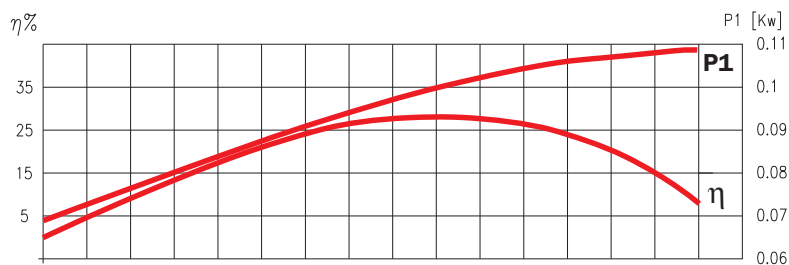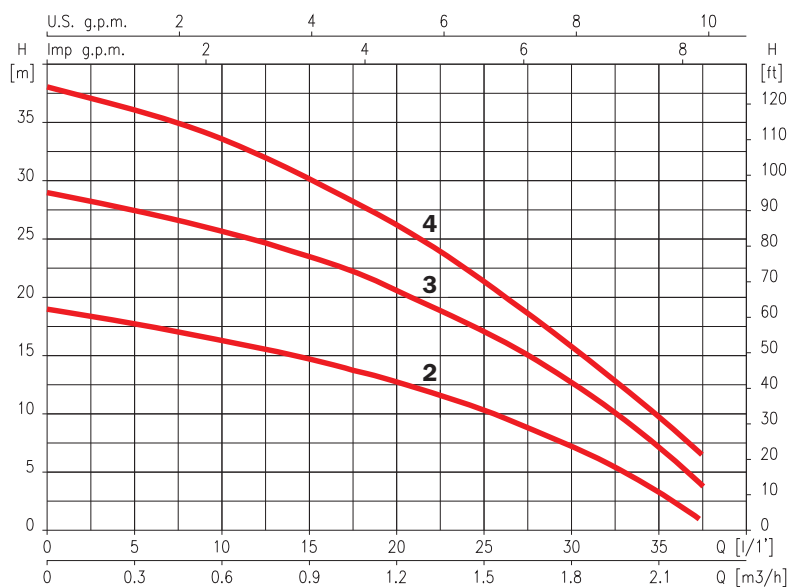

230 V 50 Hz	230/400 V 50 Hz	A			P1 (kW)		kW	HP	µF	l/1'	5	10	15	20	25	30	35	37,5
		1~ 230 V	3~ 230 V	400 V	1~	3~												
Tecno 05 2 M		1.2			0.25		0.11	0.15	6		17,7	16,7	14,9	12,7	10,2	7,4	3	1
Tecno 05 3 M		1.6			0.35		0.19	0.25	6		27,5	26	23,2	20,1	17,2	12,5	7,4	4
Tecno 05 4 M		2			0.45		0.19	0.25	6		36	33,5	30	26,5	21,5	16	10	7